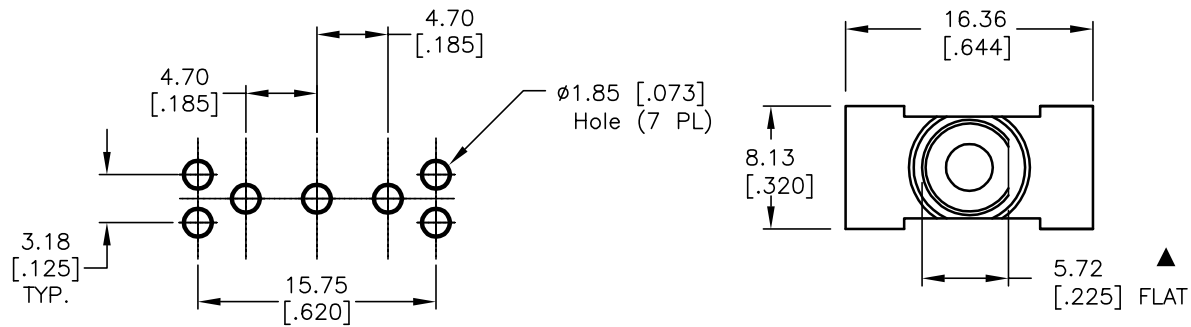




RECOMMENDED P.C.B. LAYOUT

SWITCH FUNCTION	
ON	<ON>
1-3	1-2

NOTES:

() = MOMENTARY

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. 4. RATING: 3A @120V AC
1A @250V AC
5. MATERIAL: FIXED TERMINAL & MOVING CONTACT
Copper Alloy w/Silver plate
6. CONTACT RESISTANCE: 10mILLI-ohms initial
@2-4VDC
7. ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -30°C to +85°C
11. ▲ DENOTES CRITICAL PARAMETER.

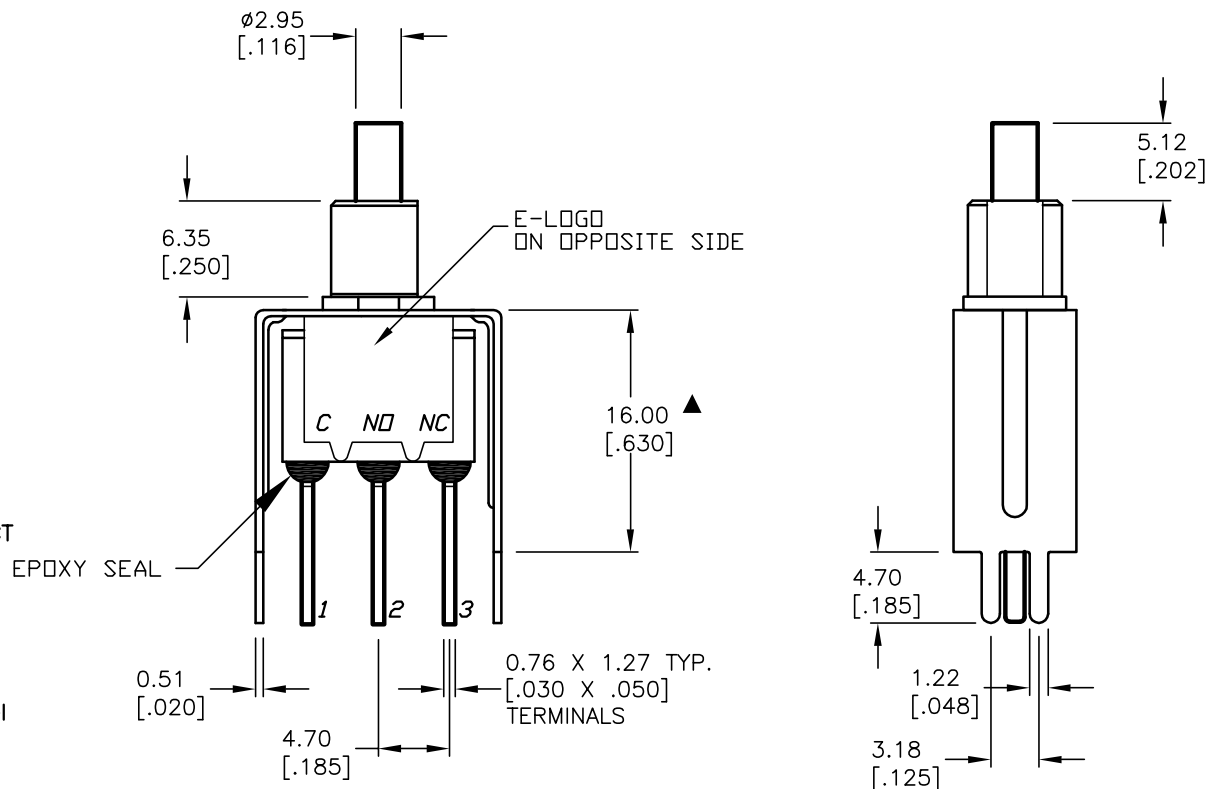

C	14074	CORRECT ACTUATOR HEIGHT	6/8/04	AR
B	13926	REMOVED THREADS	4/16/04	AR
A	13697	RELEASED FOR PRODUCTION	1/12/04	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE

700SP7B21VS3QE

SCALE

2:1

DATE

1/12/04

DR

AR

DWG

T711049

REV

C