

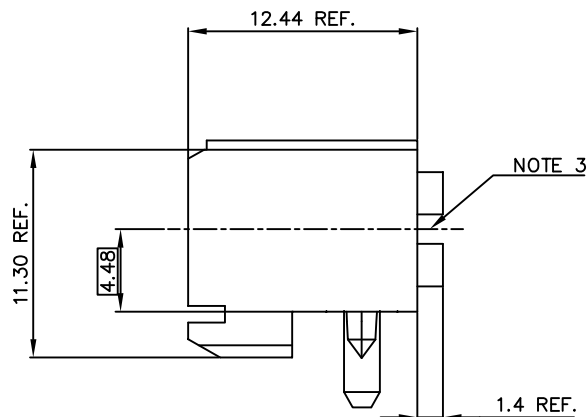
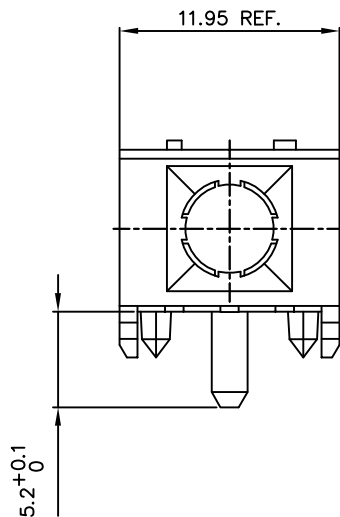


PRODUCT NR	PCB THICKNESS
70292-101LF	1.6 & 2.4




ASSEMBLY AFTER HOT RIVETING.

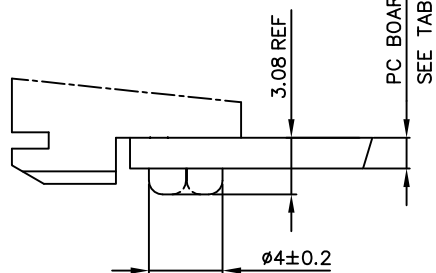

NOTE:

- INDICATED HOLES ARE UNPLATED.
- MATERIAL: LIQUID CRYSTAL POLYMER 30% GLASS, FLAME RETARDANT ACC. UL 94-V0, COLOR NATURAL.
- SLOT OPTIONAL
- THIS PRODUCT WITH "LF" SUFFIX MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS -22-008.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm MINIMUM THICK CIRCUIT BOARD.

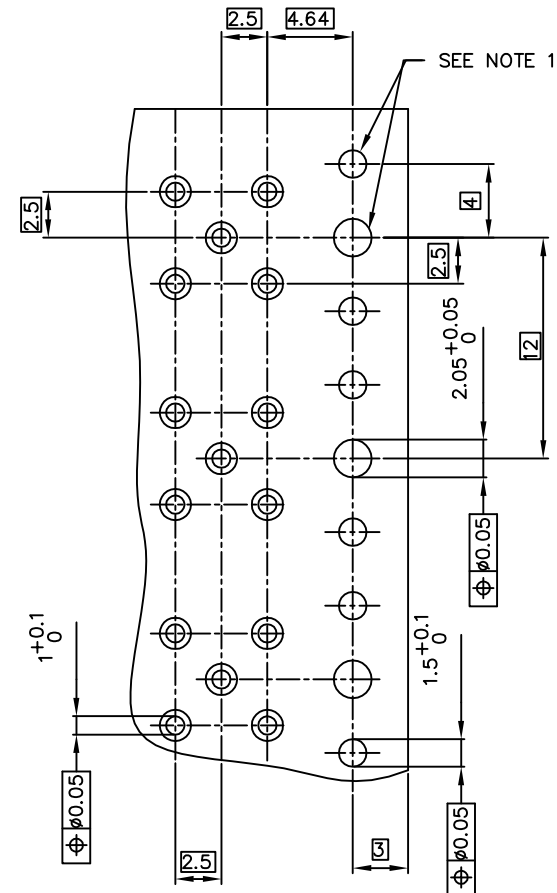

RECOMMENDED HOLE PATTERN,
COMPONENT SIDE.

mat'l. code SEE NOTE 2				tolerances unless otherwise specified		CUSTOMER COPY		ELECTRONICS	
ltr	ecm no	dr	date	linear		projection		title	www.fciconnect.com
H	005-0357	Clu	050927					R/A HOUSING RECEPTACLE COAX	
C	H20409	SLE	920809	angles				product family	ETRAL(tm)
D	H20570	DAN	920911	dr	D.Andrews	891212		code	213
E	H50663	RVI	951102	engr	P.Schalk	951102		size	dwg no
F	H90490	HME	990816	chr	A.v.Zanten	891212		scale	5:1
G	V00285	LLA	000217	app	H.v.Woensel	891212		A2	70292
sheet	revision	H							
Index	sheet	1							

PDM: Rev.H

STATUS: Released

Printed: Nov 29, 2007