


Fig. 1

- Standard solder tail receptacles can be mounted as a low profile receptacle or by the solder tail for use in smaller diameter holes.
- Series 712 uses M-M# 0255 pin. See page 134 for details.
- Hi-Rel #30 BeCu contact is rated at 3 amps. See page 208 for details.

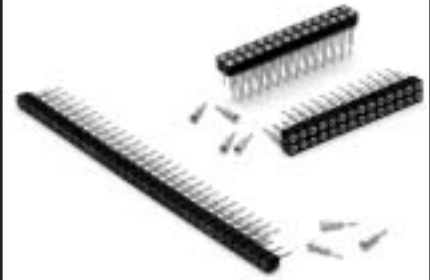

Ordering Information

Fig. 1	Single Row (.028 or .055 min. mounting holes)
	<p>712-XX-1__-41-001</p> <p>Specify # of pins \rightarrow 01-64</p>
Fig. 2	Double Row (.028 or .055 min. mounting holes)
	<p>712-XX-2__-41-001</p> <p>Specify # of pins \rightarrow 02-64</p>

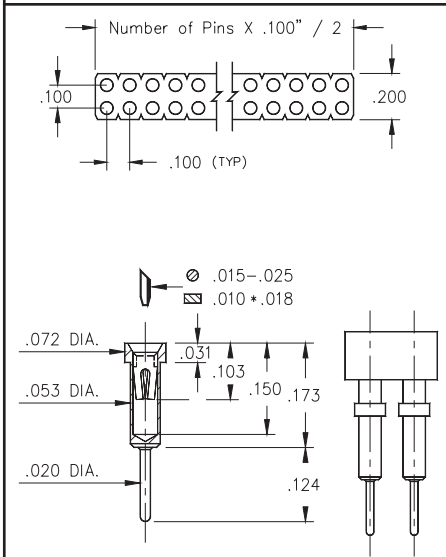


Fig. 2

***XX= Plating Code
See Below***

SPECIFY PLATING CODE XX=	13		93	
Sleeve (Pin)	10 μ " Au		200 μ " Sn/Pb	
Contact (Clip)	30 μ " Au		30 μ " Au	