


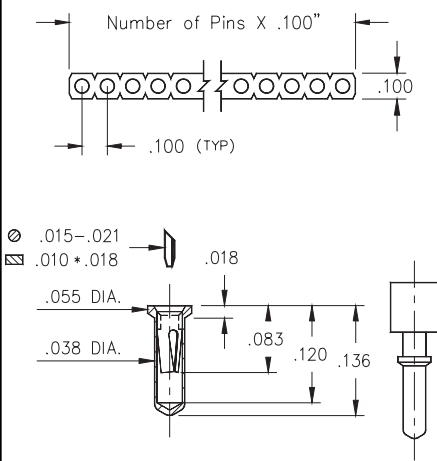


Fig. 1

- Ultra low profile receptacles sit .018" above the board.
- Series 714 uses MM #0552-1 and MM #0552-2 pin receptacles. See page 127 for details.
- Hi-Rel, 3-finger BeCu #11 contact is rated at 3 amps. See page 206 for details.
- Insulators are high temp. thermoplastic.

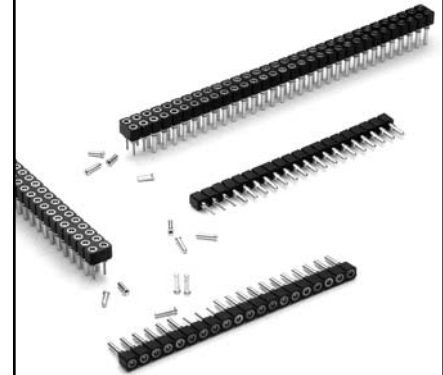

Ordering Information

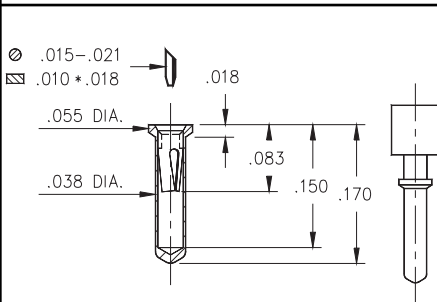


Fig. 2

Fig. 1

Single Row (.039 min. mounting hole)

714-XX-1__-31-012000

Specify # of pins → 01-64

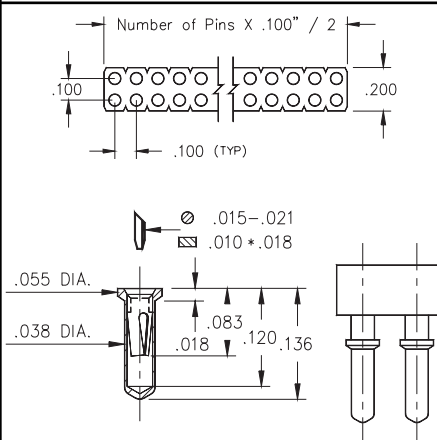


Fig. 3

Fig. 3

Single Row (.039 min. mounting hole)

714-XX-1__-31-018000

Specify # of pins → 01-64

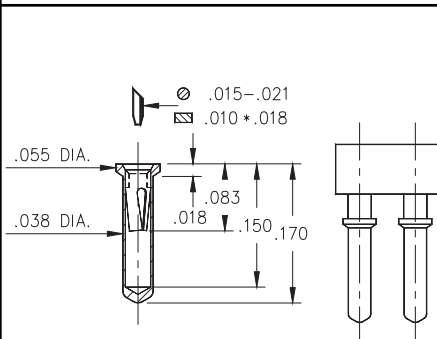


Fig. 4

Fig. 4

Double Row (.039 min. mounting hole)

714-XX-2__-31-012000

Specify # of pins → 02-64

Double Row (.039 min. mounting hole)

714-XX-2__-31-018000

Specify # of pins → 02-64



XX=Plating Code
See Below

For RoHS compliance
select plating code.

SPECIFY PLATING CODE XX=			93			43	
Sleeve (Pin)			200μ" Sn/Pb			200μ" Sn	
Contact (Clip)			30μ" Au			30μ" Au	