

| LEAD-FREE P/N | DIM A | DIM B | DIM C | DIM D | DIM L | CABLE TYPE | IMPEDANCE |
|---------------|-------|-------|-------|-------|-------|---------------------------------------|-----------|
| 71634-X11LF | 1.05 | 1.70 | 2.25 | 3.20 | 10.4 | RG178 B/U RG196 A/U | 75 Ohm |
| 71634-X21LF | 1.70 | 2.70 | 3.20 | 3.80 | 10.4 | RG174 A/U RG179 RG188 A/U RG316 /U | 75 Ohm |
| 71634-X31LF | 1.70 | 2.70 | 3.58 | 4.30 | 10.4 | RG316/U2 SHIELDED | 75 Ohm |
| 71634-X41LF | 2.20 | 3.20 | 4.10 | 5.00 | 10.4 | GPT CABLE | 75 Ohm |

NOTES:

1. UNDERPLATING Ni.
2. GENERAL TOLERANCE ± 0.10
3. FIXING CLIP PLATED WITH GOLD FLASH
FOR IDENTIFICATION PURPOSES

| | | |
|-------------------|---------------------------|---------------------------|
| 1 | 1.3 μ m Au MIN | 1.3 μ m Au MIN |
| PLATING CODE X | PLATING CONTACT AREA 3 | PLATING CONTACT AREA 4 |

NOTE: RoHS INFORMATION

- The "LF" product meets European union Directives and other country regulations as described in GS-22-008.
- The product is not intended to be exposed to a manufacturing solder process.
- Packaging spec: see GS-14-920.

REV F - 2006-04-17

1

2

3



DIN COAX HDR
STR CTW INSERT

1

71634


Rev

1

CUSTOMER sheet 1 of 6

Customer Sheet 1 of 3

29.2±0.2

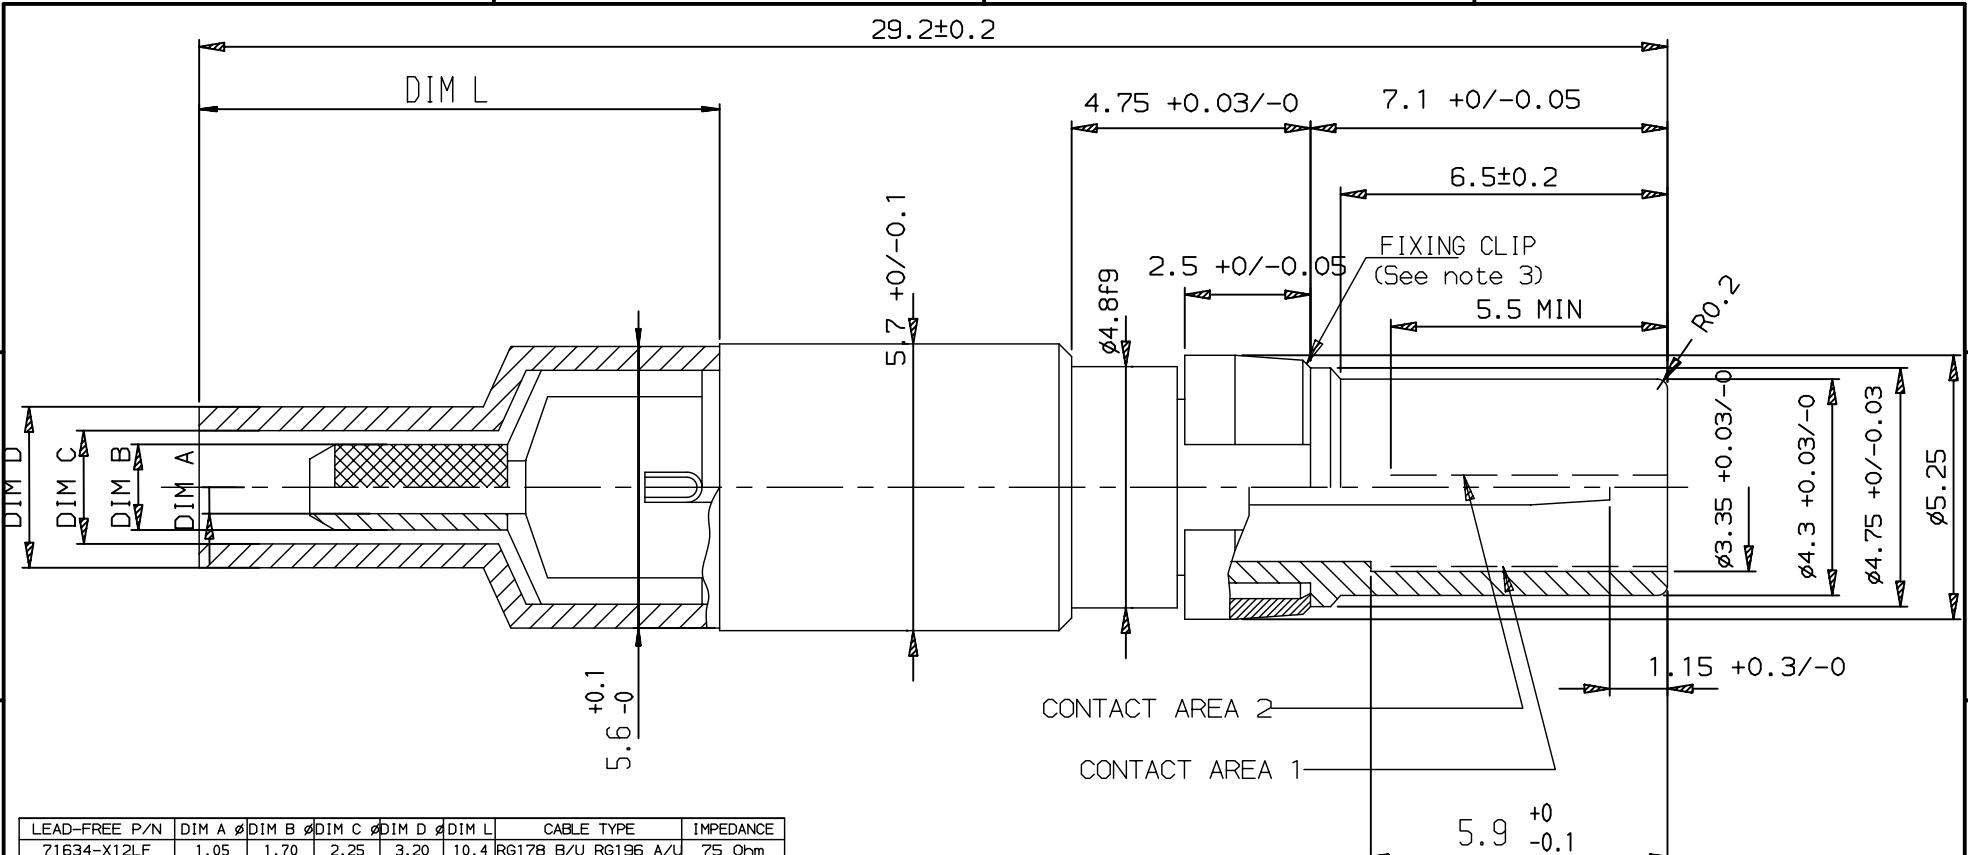

| LEAD-FREE P/N | DIM A | DIM B | DIM C | DIM D | DIM L | CABLE TYPE | IMPEDANCE |
|---------------|-------|-------|-------|-------|-------|---|-----------|
| 71634-X12LF | 1.05 | 1.70 | 2.25 | 3.20 | 10.4 | RG178 B/U RG196 A/U | 75 Ohm |
| 71634-X22LF | 1.70 | 2.70 | 3.20 | 3.80 | 10.4 | RG174 A/U RG179 B/U RG187 A/U RG187 A/URG316 U | 75 Ohm |
| 71634-X32LF | 1.70 | 2.70 | 3.55 | 4.30 | 10.4 | L910/9/-19 | 75 Ohm |
| 71634-X42LF | 2.20 | 3.20 | 4.10 | 5.00 | 10.4 | GPT CABLE | 75 Ohm |

NOTES:

1. UNDERPLATING Ni.
2. GENERAL TOLERANCE ±0.10
3. FIXING CLIP PLATED WITH GOLD FLASH
FOR IDENTIFICATION PURPOSES.


| PLATING CODE X | 1.3 µm Au MIN | 1.3 µm Au MIN |
|----------------|------------------------|------------------------|
| | PLATING CONTACT AREA 3 | PLATING CONTACT AREA 4 |

NOTE: RoHS INFORMATIONS

- The "LF" product meets European union Directives and other country regulations as described in GS-22-008.
- The product is not intended to be exposed to a manufacturing solder process.
- Packaging spec: see GS-14-920.

European Views

| www.fciconnect.com | | | surface ISO 1302 | tolerance std ISO 406 ISO 1101 | projection |
|---------------------------------------|----------|------------|--------------------------------|--------------------------------|------------|
| TOLERANCES UNLESS OTHERWISE SPECIFIED | | | | | |
| Dr | GOISNARD | 2006/11/05 | ANGULAR | 0.X | ±0.1 |
| Eng | GOISNARD | 2006/11/05 | LINEAR | 0.XX | ±0.1 |
| Chr | LEGARE | 2006/11/05 | | 0.XXX | ±0.1 |
| Appr | LEGARE | 2006/11/05 | Product family | BACKPANEL | Spec ref |
| FCI | | | DIN COAX RCP STR CTW INSERT | | |
| catalog no | | | 71634 | | |
| Rev. | | | N | | |
| CUSTOMER | | | sheet 2 of 6 | | |

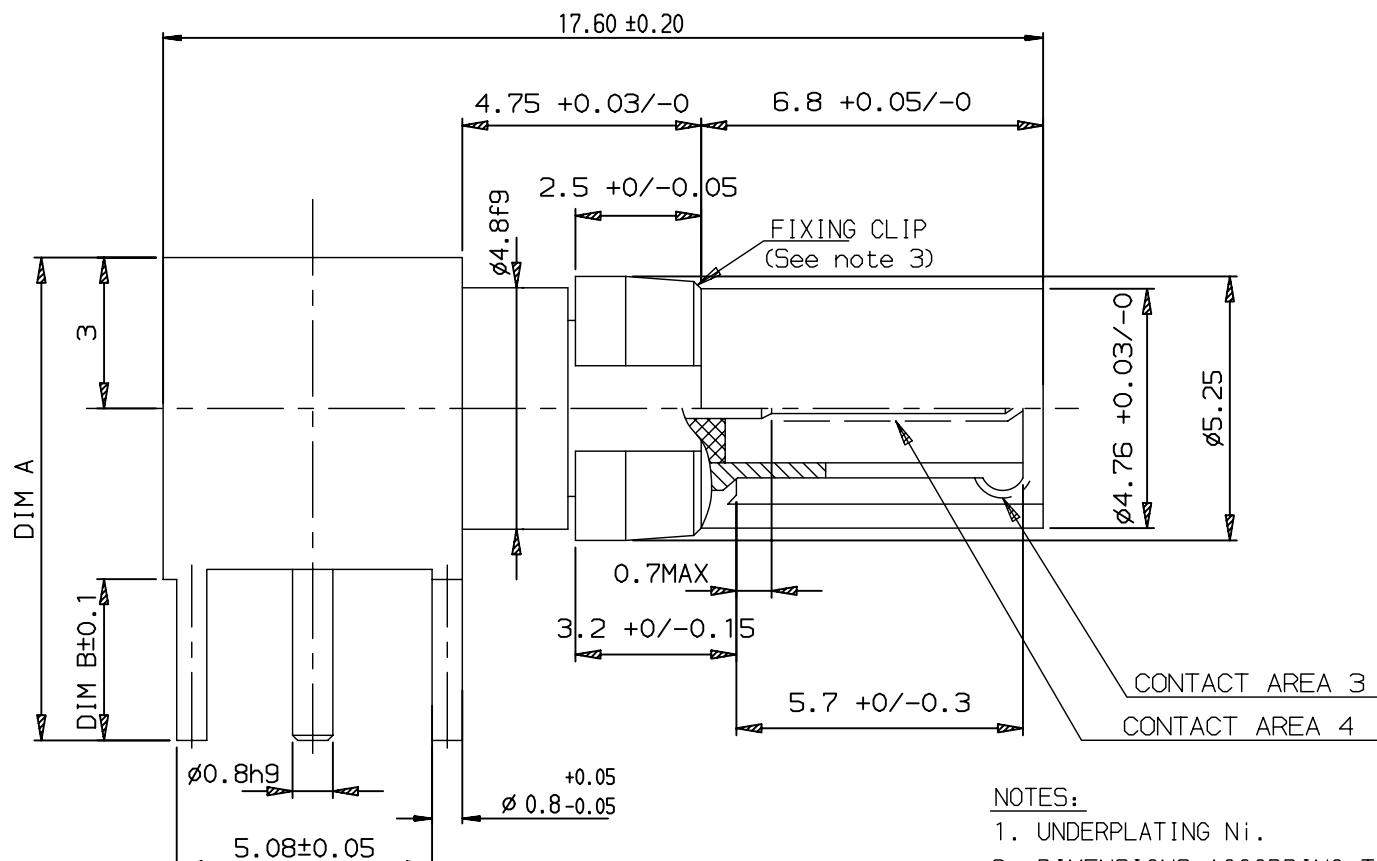

NOTES:

1. UNDERPLATING Ni.
2. DIMENSIONS ACCORDING TO DIN 41626
3. GENERAL TOLERANCE ±0.10
3. FIXING CLIP PLATED WITH GOLD FLASH

| LEAD-FREE P/N | DIM A | DIM B | IMPEDANCE |
|---------------|-------|-------|-----------|
| 71634-X03LF | 9.6 | 3.2 | 75 Ohm |
| 71634-X13LF | 10.4 | 4.0 | 75 Ohm |

NOTE: RoHS INFORMATIONS

- The "LF" product meets European union Directives and other country regulations as described in GS-22-008.
- The product is not intended to be exposed to a manufacturing solder process.
- Packaging spec: see GS-14-920.

| www.fciconnect.com | | | surface | tolerance std | projection |
|--------------------|---------------------|----------------------|-------------------|------------------|---------------|
| Dr | GOISNARD | 2006/11/05 | ISO 1302 | ISO 406 ISO 1101 | mm |
| Eng | GOISNARD | 2006/11/05 | ANGULAR | | |
| Chr | LEGARE | 2006/11/05 | LINEAR | | |
| Appr | LEGARE | 2006/11/05 | 0.XX ±2° | 0.XX ±0.1 | Scale |
| | | | | 0.XXX ±0.1 | 5 |
| | | | Product family | BACKPANEL | ECN LS08-0057 |
| | | | | | Spec ref - |
| FCI | DIN COAX HDR | RA STB INSERT | catalog no | 71634 | Rev. N |

25.2±0.2

1.45 +0/-0.15 4.75 +0.03/-0 7.1 +0/-0.05

SW5

6.5

2.5 +0/-0.05

FIXING CLIP
(See note 4)

5.5 MIN

R0.2

1.15 +0.3/-0

Ø4.8fg

1.15 +0.3/-0

CONTACT AREA 2

CONTACT AREA 1

Ø3.35 +0.03/-0

Ø4.3 +0.03/-0

Ø4.75 +0/-0.03

Ø5.25

A

A

B

B

C

C

| LEAD-FREE P/N | IMPEDANCE |
|---------------|-----------|
| 71634-X04LF | 75 Ohm |

NOTE:RoHS INFORMATIONS

- The "LF" product meets European union Directives and other country regulations as described in GS-22-008.
- The product is not intended to be exposed to a manufacturing solder process.
- Packaging spec: see GS-14-920.

NOTES:

1. UNDERPLATING Ni.
2. DIMENSIONS ACCORDING TO DIN 41626
3. FIXING CLIP PLATED WITH GOLD FLASH
FOR IDENTIFICATION PURPOSES.

| | | |
|----------------|------------------------|------------------------|
| 1 | 1.3 µm Au MIN | 1.3 µm Au MIN |
| PLATING CODE X | PLATING CONTACT AREA 1 | PLATING CONTACT AREA 2 |

European Views

| www.fciconnect.com | | | surface | tolerance std | projection |
|--------------------|----------|------------|--------------------|------------------|-----------------|
| Dr | GOISNARD | 2006/11/05 | ISO 1302 | ISO 406 ISO 1101 | mm |
| Eng | GOISNARD | 2006/11/05 | ANGULAR | | |
| Chr | LEGARE | 2006/11/05 | 0.XX ^{±2} | 0.XX | ±0.1 |
| Appr | LEGARE | 2006/11/05 | Product family | BACKPANEL | size A3 Scale 5 |
| | | | | | ECN LS08-0057 |
| | | | | | Spec ref - |



DIN COAX RCP
COUPLER 75 MICRON SHORT

catalog no

-

71634

Rev. N

CUSTOMER sheet 4 of 6

