



Copyright FCI.

D

NOTES:
1. MATERIAL:

- A. HEADER HOUSING: LIQUID CRYSTAL POLYMER 30% GLASS
FLAME RETARDANT ACC. UL 94 V0.
B. TERMINAL: TINBRONZE
C. WAFER: LIQUID CRYSTAL POLYMER 30% GLASS
FLAME RETARDANT

2. PACKAGING ACCORDING EUR-14-005.

3. MARKING ACCORDING DWG 59550.

4. FOR MORE DETAILS REFER THE DRAWING 72844_C
(4 X6 SIGNAL SOFIX BOARD CONNECTOR)






5-ROHS: INFORMATIONS

-This product meets European Union Directives and other
country regulations as described in GS-22-008.

-The housing will withstand exposure to 260°C
peak temperature for 5 second in a wave
solder application with a 1.6mm minimum thick
circuit board. See Application notes/procedures if
they are available.

-Packaging spec: See GS-14-920

REV F - 2006-04-17

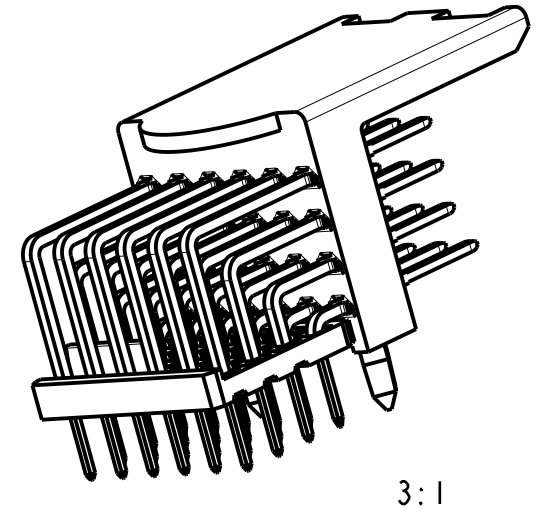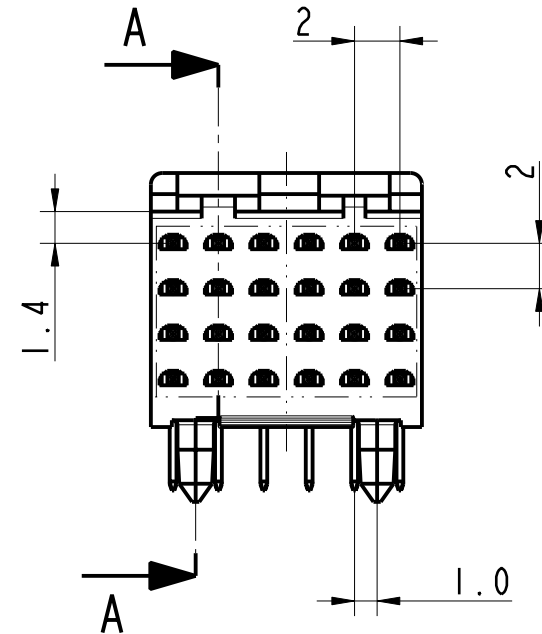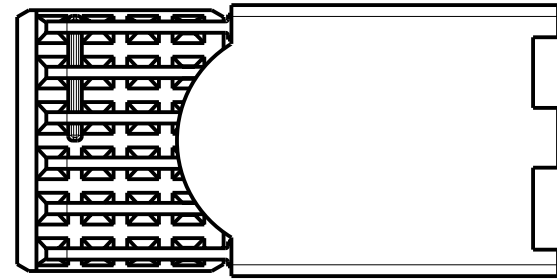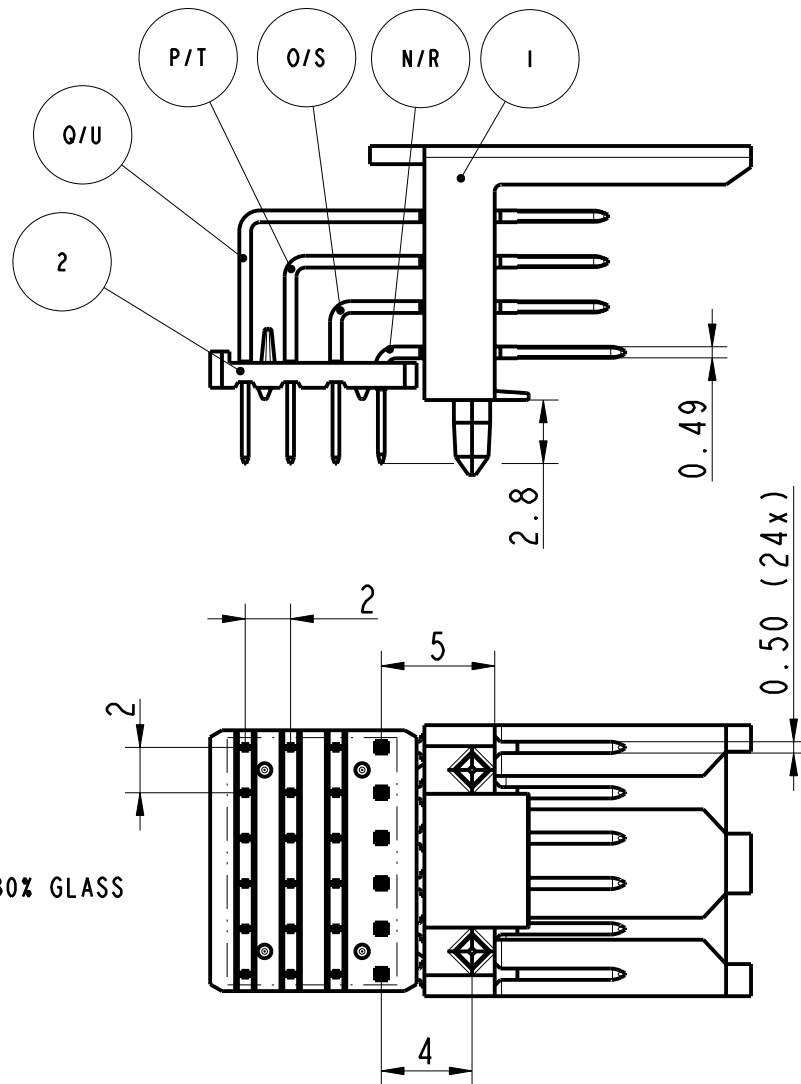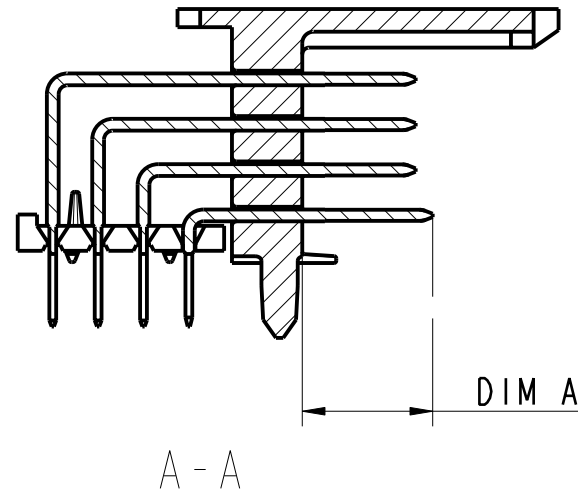

Dimension with oval around are critical dimensions including
any attached geometrical tolerance. Other features or
stand-alone geometrical tolerances being critical have a note
"CRITICAL FEATURE" below the item
A symbol $\triangle x$ (x: drawing current revision) will be next to any
dimension, view or note which has been modified with the current
drawing revision





Performance level

72800-11YLF

Telcordia CO.

72800-21YLF

Customer Special

www.fciconnect.com			surface 0.8 ISO 1302		tolerance std ISO 406 ISO 1101		projection 		 mm	
			TOLERANCES UNLESS OTHERWISE SPECIFIED							
Dr	J.Taron	2004/11/19	ANGULAR	LINEAR	0.x	±0.3	size A3	Scale 3:1		
Eng	J.Taron	2004/11/19			0.xx	±0.1				
Chr	P.Legare	2004/11/19			0° ±2°	0.xxx	±0.05	ECN LS07-0195 Spec ref SEE NOTES		
Appr	P.Legare	2004/11/19	Product family SOFIX							
FCi			title SOFIX 72 POS WITH FRONT SPRINGS SHIELDED HDR 3x24 STB				dwg no 72800_C		Rev. D	
			catalog no				Inspection		sheet 1 of 2	

rev	ecn no	dr	date
A	-	JTA	2004/11/19
B	-	JTA	2
C	LS06-0084	LGO	2006/07/04
D	LS07-0195	JTA	2007/10/02
-	-	-	-
-	-	-	-
-	-	-	-

PDM: Rev:D

STATUS: Released

Printed: May 07, 2008

1

2

3

4

A

B

C

D

A

B


C

D






Product number							
Item			Column				
	Rad Row	Number	6	5	4	3	2 1
72800-X11LF	D	24	Q	Q	Q	Q	Q
	C		P	P	P	P	P
	B		O	O	O	O	O
	A		N	N	N	N	N
72800-X12 LF	D	24	U	U	U	U	Q
	C		T	T	T	T	P
	B		S	S	S	S	S
	A		N	N	N	N	N
72800-X13 LF	D	12	Q	Q	Q	Q	Q
	C						
	B		O	O	O	O	O
	A						

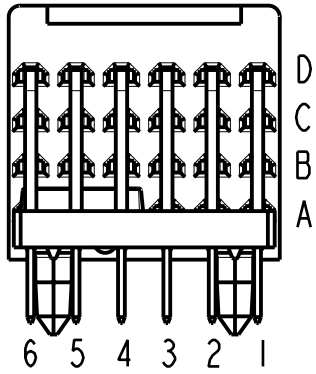Item	DIM A
N	5.75
O	5.00
P	5.00
Q	5.00
R	5.00
S	5.75
T	5.75
U	5.75



Copyright FCI.

www.fciconnect.com			surface 0.8 ISO 1302		tolerance std ISO 406 ISO 1101		projection	mm	
			TOLERANCES UNLESS OTHERWISE SPECIFIED						
Dr	J.Taron	2004/11/19	ANGULAR	LINEAR	0.X	±0.3	size A3	Scale 3:1	
Eng	J.Taron	2004/11/19			0.XX	±0.1		ECN LS07-0195	
Chr	P.Legare	2004/11/19	0° ±2°		0.XXX	±0.05			
Appr	P.Legare	2004/11/19	Product family				SOFIX	Spec ref	SEE NOTES
			title SOFIX 72 POS WITH FRONT SPRINGS SHIELDED HDR 3x24 STB				dwg no 72800_C	Rev. D	
								catalog no	

1

2

3

4