

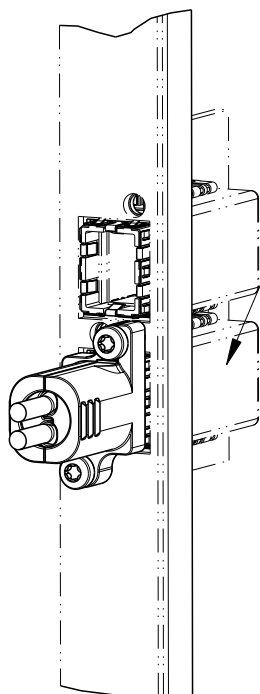


LEAD FREE PRODUCT NO.  
72862-X01LF

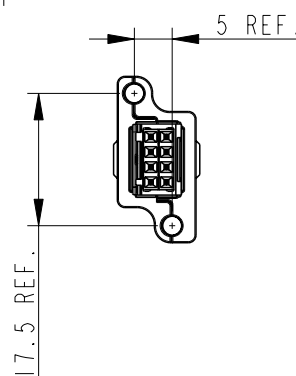

See Sofix Shielded I/O

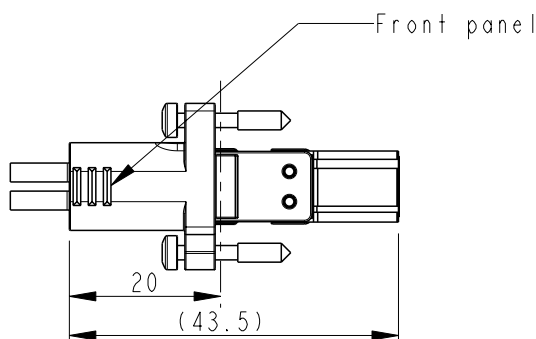

PRODUCT SPECIFICATION: GS-12-308  
PACKAGING SPECIFICATION: GS-14-796  
APPLICATION SPECIFICATION: GS-20-019.

MATERIAL:

1	WAFER	30 % GLASS FILLED LCP
2	SHROUD	30 % GLASS FILLED POLYAMIDE FLAME RETARDANT ACC. TO UL-94
3	COVER	ZINC ALLOY
4	TERMINAL	TINBRONZE
5	FERRULE	TINBRONZE
6	SCREW	STEEL
7	CLIP	INOX
8	FERRULE HOLDER	ZINC ALLOY




9-ROHS INFORMATIONS:

- This "LF" product meets European Union Directives and other country regulations as described in GS-22-008.
- This product is not intended to be exposed to a manufacturing solder process
- Packaging spec: See GS-14-920

rev	ecn no	dr	date
A	B30048	SVH	2003/02/26
B	LS4129	JTA	2004/12/15
C	LS05-0102	JTA	2005/08/11
D	LS06-0107	LGO	2006/08/30
E	LS06-0143	LGO	2006/09/25
F	LS07-0285	JTA	2007/11/09
-	-	-	-

72862-X01LF	
72862-101LF	Standard Product
72862-201LF	Customer Special



www.fciconnect.com			surface 0.8 / ISO 1302		tolerance std ISO 406    ISO 1101		projection 		mm 		
TOLERANCES UNLESS OTHERWISE SPECIFIED											
Dr	S.Van Humbeeck	2003/02/25	ANGULAR	LINEAR	0.X	±0.3	size A4	Scale 1:1			
Eng	J.Taron	2004/11/20			0.XX	±0.1					
Chr	P.Legare	2004/11/20			0°    ±2°	0.XXX	±0.05	ECN		LS07-285	
Appr	P.Legare	2004/11/20	Product family				SOFIX	Spec ref		RELEASED	
		title				dwg no				Rev.	
		SHIELDED CABLE CONNECTOR				72862_C				F	
		8 POS - SOLDER									
catalog no					CUSTOMER COPY			sheet 1 of 3			

REV F - 2006-04-17



PDM: Rev:F




STATUS Released

Printed: Apr 17, 2008

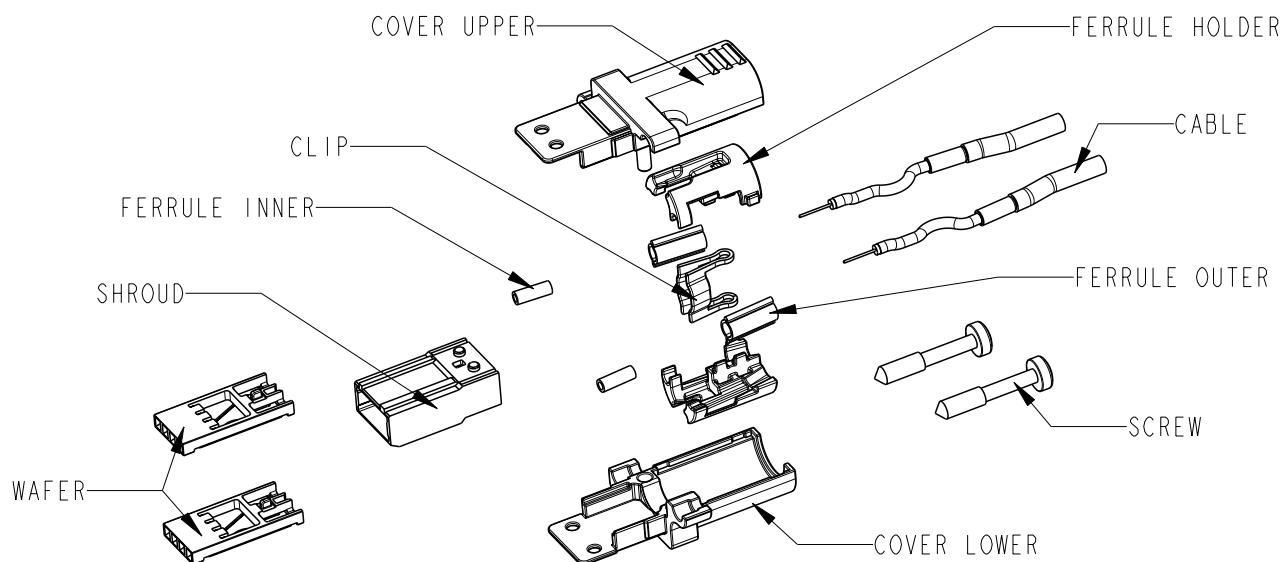

Copyright FCI.




www.fciconnect.com			surface 0.8 ISO 1302		tolerance std ISO 406 ISO 1101		projection 		mm 	
			TOLERANCES UNLESS OTHERWISE SPECIFIED							
Dr	S. Van Humbee	2003/02/25	ANGULAR	LINEAR	0.X	±0.3	size A4	Scale 1:1		
Eng	J. Taron	2004/11/20			0.XX	±0.1				
Chr	P. Legare	2004/11/20			0.XXX	±0.05				
Appr	P. Legare	2004/11/20	Product family			SOFIX		Spec ref		RELEASED
		title SHIELDED CABLE CONNECTOR				dwg no 72862_C		Rev. F		
		8 POS - SOLDER								
		catalog no				CUSTOMER COPY			sheet 2 of 3	

LEAD-FREE PRODUCTS:(see note 9)

Kit: 72862-X01LF	
COMPONENTS	QTY
COVER UPPER	1
COVER LOWER	1
FERRULE OUTER	2
FERRULE INNER	1
SCREW	2
SHROUD	1
FERRULE HOLDER	1
WAFER	2
CLIP	1






Dimension with oval around are critical dimensions including any attached geometrical tolerance. Other features or stand-alone geometrical tolerances being critical have a note "CRITICAL FEATURE" below the item

A symbol  (x: drawing current revision) will be next to any dimension, view or note which has been modified with the current drawing revision



Copyright FCI.

www.fciconnect.com			surface 0.8 ISO 1302		tolerance std ISO 406 ISO 1101		projection 		mm 						
			TOLERANCES UNLESS OTHERWISE SPECIFIED												
Dr	S. Van Humbee	2003/02/25	ANGULAR	LINEAR	0.X	±0.3	size A4	Scale 1:1							
Eng	J. Taron	2004/11/20			0.XX	±0.1									
Chr	P. Legare	2004/11/20			0.XXX	±0.05									
Appr	P. Legare	2004/11/20	Product family			SOFIX		Spec ref		LS07-285 RELEASED					
		title				SHIELDED CABLE CONNECTOR				dwg no		72862_C		Rev.	
						8 POS - SOLDER								F	
		catalog no								CUSTOMER COPY		sheet 3 of 3			

REV F - 2006-04-17

PDM: Rev:F

STATUS Released

Printed: Apr 17, 2008