
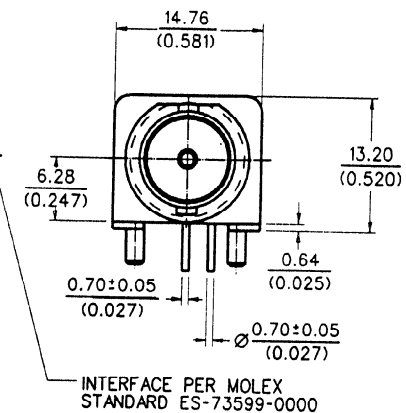
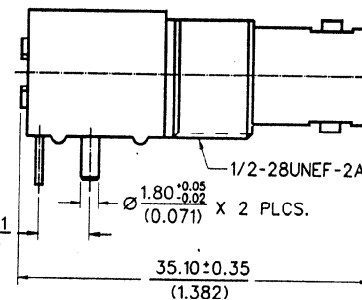



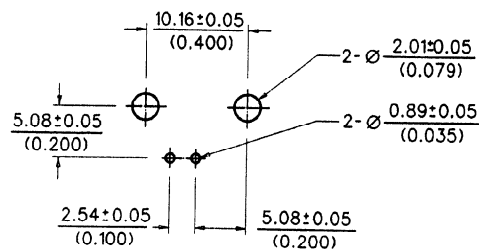

CONSTRUCTION:

BODY-----ZINC ALLOY
HOUSING-----POLYESTER BUTYLENE TEREPHTHALATE (WHITE)
CENTER CONTACT---PHOSPHOR BRONZE
INSULATOR-----POLYPROPYLENE (94 V-2)
MOUNTING POST-----BRASS
SOLDER TAIL-----BRASS WIRE
WASHER-----PHOSPHOR BRONZE
NUT-----BRASS

FINISH:


BODY-----NICKEL PLATING
CENTER CONTACT---GOLD PLATING
SOLDER TAIL-----TIN PLATING
MOUNTING POST-----TIN PLATING
WASHER-----NICKEL PLATING
NUT-----NICKEL PLATING

MECHANICAL & ELECTRICAL CHARACTERISTICS:
PER PRODUCT SPECIFICATION PS-73598-0051



MATERIAL & FINISHES:
PER PRODUCT SPECIFICATION PS-73598-0051

PACKAGING:
PLASTIC TRAYS

LOCK WASHER



JAM NUT



RECOMMENDED MOUNTING HOLE
MAXIMUM PANEL THICKNESS: 5.5 mm
RECOMMENDED MOUNTING TORQUE 5 inch-pounds MAX.

MATERIAL : SEE NOTE				MOLEX		TAIWAN LTD.	
FINISH : SEE NOTE						(R.F. DIVISION)	
SCALE : 2:1 UNIT : mm/(inch)				GENERAL TOLERANCES			
DRAWN BY : C.M.HUNG 93/02/01				ANGLE : ±3° DIM : ±.25/.010			
CHK'D BY :				DRW. NO. : SDA-73100-0069		REV A	
LTR	REVISION RECORD	ECN	DR	DATE	APPR'D BY :	TITLE : 75 OHMS BNC R/A	
			CHK		93/4/1	PCB RECEPTACLE	
STANDARD ITEM				SHEET OF			
YES NO							

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX TAIWAN AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION MXT . So - 13