

MATERIALS AND FINISHES






BODY ZINC ALLOY
PLATED NICKEL

CENTER CONTACT PHOSPHOR BRONZE
PLATED GOLD/TIN


INSULATOR POLYPROPYLENE

BNC JACK
INTERFACE


TOP VIEW

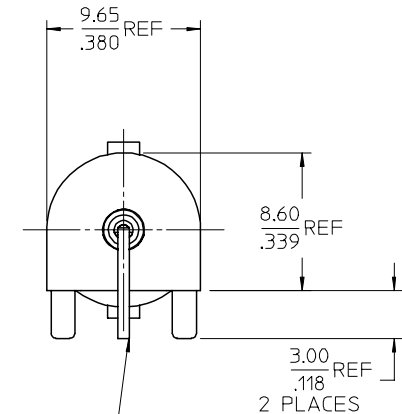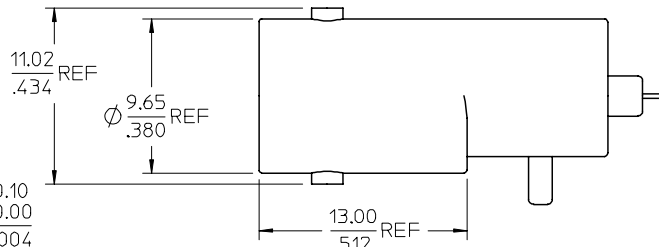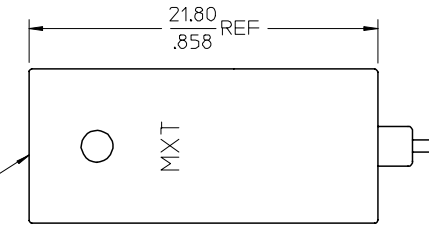

THIS LEAD IS FORMED TO FIT
RECOMMENDED PCB PATTERN
DURING INSTALLATION

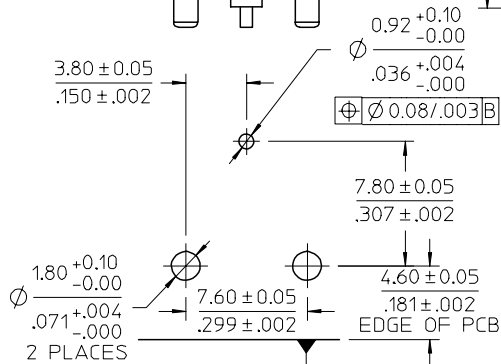

RECOMMENDED PCB PATTERN

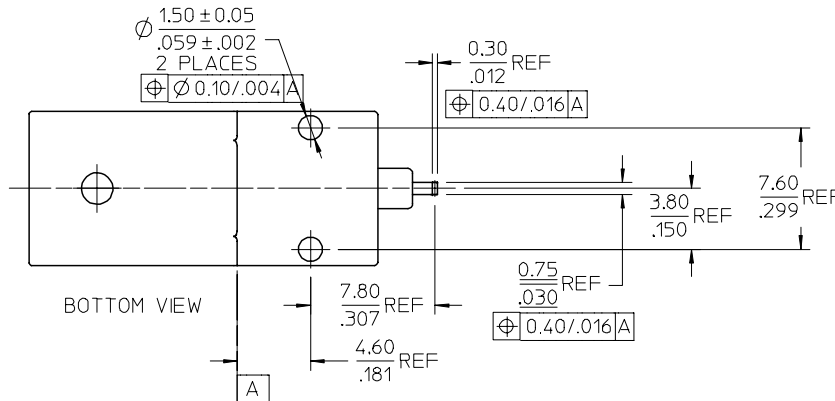

BOTTOM VIEW

PS-73598-0050

PRODUCT SPECIFICATION

SPECIFICATION

DESCRIPTION

73171-3150	73100-0105, ONE PER BAG
73100-0105	BULK
PART NO.	PACKAGING

CHG: REDREW IN SD
ADDED P/N
73100-0105
EC NO: URF2007-0396
DRAWN: TELAHARTY 2007/05/01
CHKD: SHAH 2007/05/01
APPR: JIM ENER 2007/05/01

QUALITY
SYMBOLS
=0
=0

GENERAL TOLERANCES (UNLESS SPECIFIED)	
mm	INCH
4 PLACES ± .005	± .0005
3 PLACES ± .003	± .0003
2 PLACES ± .002	± .0002
1 PLACE ± .001	± .0001

DIMENSION STYLE	
MM/IN	DATE
DRAWN BY	THOMPSON
CHECKED BY	A CHANG
APPROVED BY	A CHANG

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
METRIC		
BNC JACK, R/A RECEPTACLE 50 OHMS BNC-J/RA/PCB		

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

SEE TABLE

MATERIAL NO.	DOCUMENT NO.	SHEET NO.
		1 OF 1