
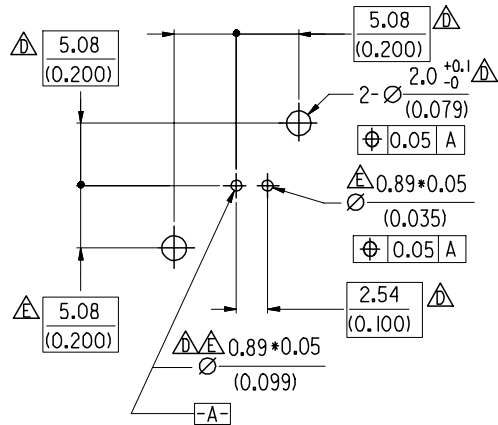


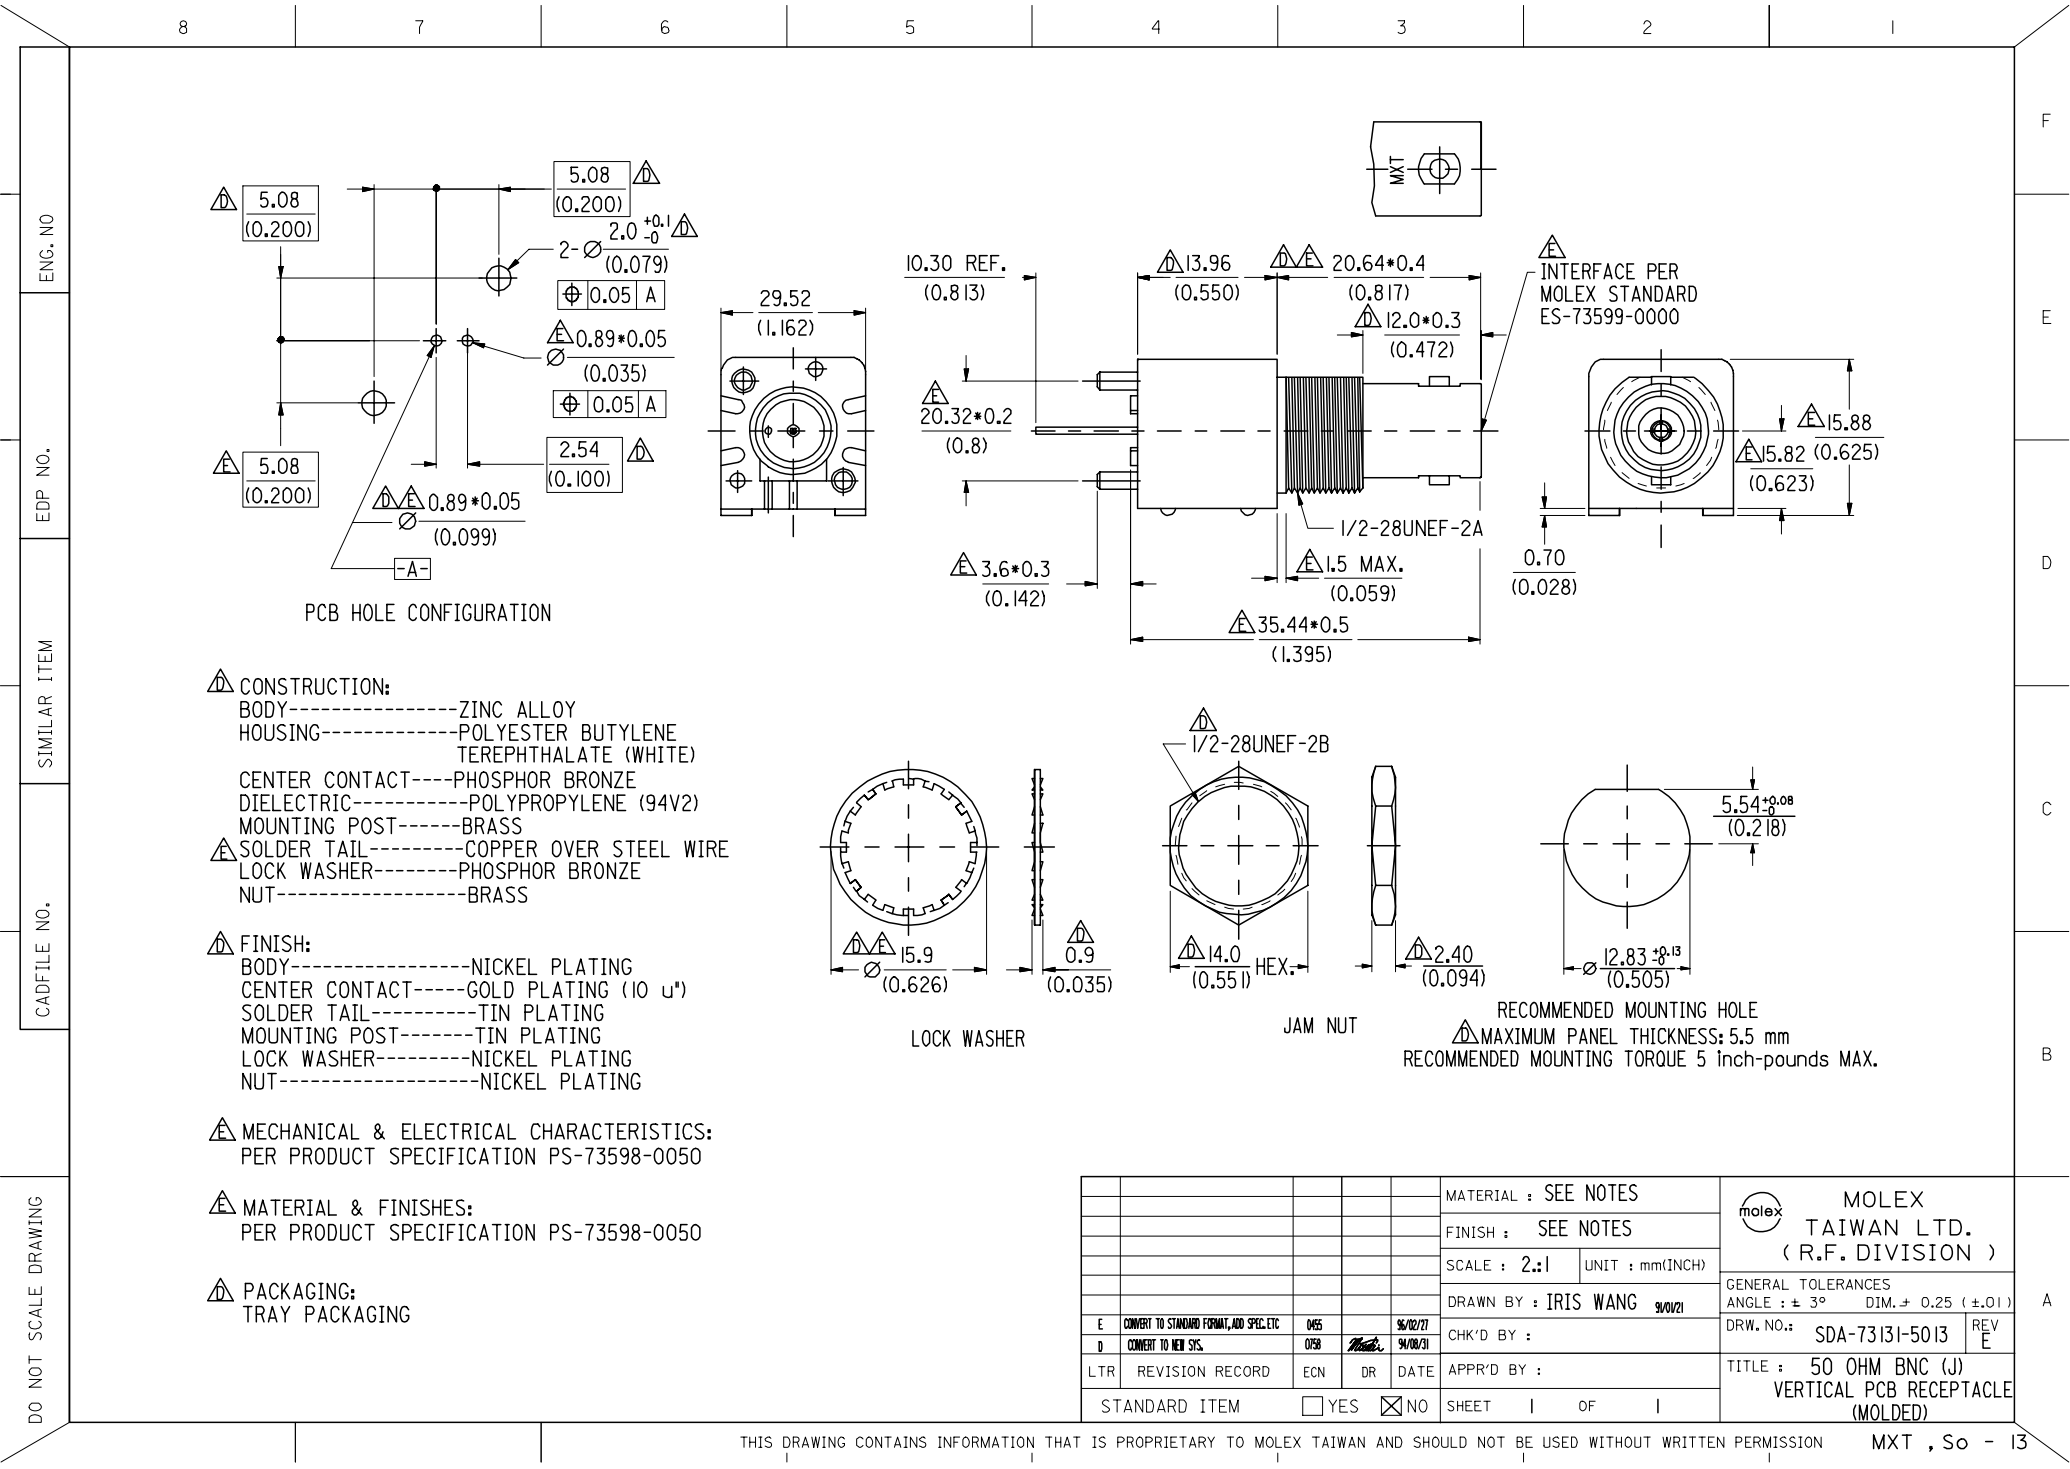


PCB HOLE CONFIGURATION

- CONSTRUCTION:
- BODY-----ZINC ALLOY
 - HOUSING-----POLYESTER BUTYLENE TEREPHTHALATE (WHITE)
 - CENTER CONTACT-----PHOSPHOR BRONZE
 - DIELECTRIC-----POLYPROPYLENE (94V2)
 - MOUNTING POST-----BRASS
 - SOLDER TAIL-----COPPER OVER STEEL WIRE
 - LOCK WASHER-----PHOSPHOR BRONZE
 - NUT-----BRASS
- FINISH:
- BODY-----NICKEL PLATING
 - CENTER CONTACT-----GOLD PLATING (10 U')
 - SOLDER TAIL-----TIN PLATING
 - MOUNTING POST-----TIN PLATING
 - LOCK WASHER-----NICKEL PLATING
 - NUT-----NICKEL PLATING


MECHANICAL & ELECTRICAL CHARACTERISTICS:
PER PRODUCT SPECIFICATION PS-73598-0050

MATERIAL & FINISHES:
PER PRODUCT SPECIFICATION PS-73598-0050


PACKAGING:
TRAY PACKAGING

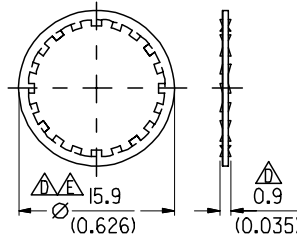

LOCK WASHER

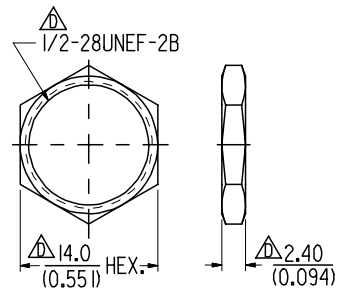


JAM NUT

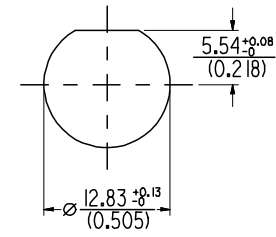

RECOMMENDED MOUNTING HOLE
MAXIMUM PANEL THICKNESS: 5.5 mm
RECOMMENDED MOUNTING TORQUE 5 inch-pounds MAX.

						MATERIAL : SEE NOTES	 MOLEX TAIWAN LTD. (R.F. DIVISION)	
						FINISH : SEE NOTES		
						SCALE : 2:1		UNIT : mm(INCH)
						DRAWN BY : IRIS WANG 94/01/21		
E	CONVERT TO STANDARD FORMAT, ADD SPEC. ETC	YES		96/02/27		GENERAL TOLERANCES ANGLE : ± 3° DIM. ± 0.25 (±.01)		
D	CONVERT TO NEW SYS.	YES	<i>Mob.</i>	94/08/31		CHK'D BY :	DRW. NO.: SDA-73131-5013	
LTR	REVISION RECORD	ECN	DR	DATE		APPR'D BY :		REV E
STANDARD ITEM				☐ YES	☒ NO	SHEET 1 OF 1		
TITLE : 50 OHM BNC (J) VERTICAL PCB RECEPTACLE (MOLDED)								

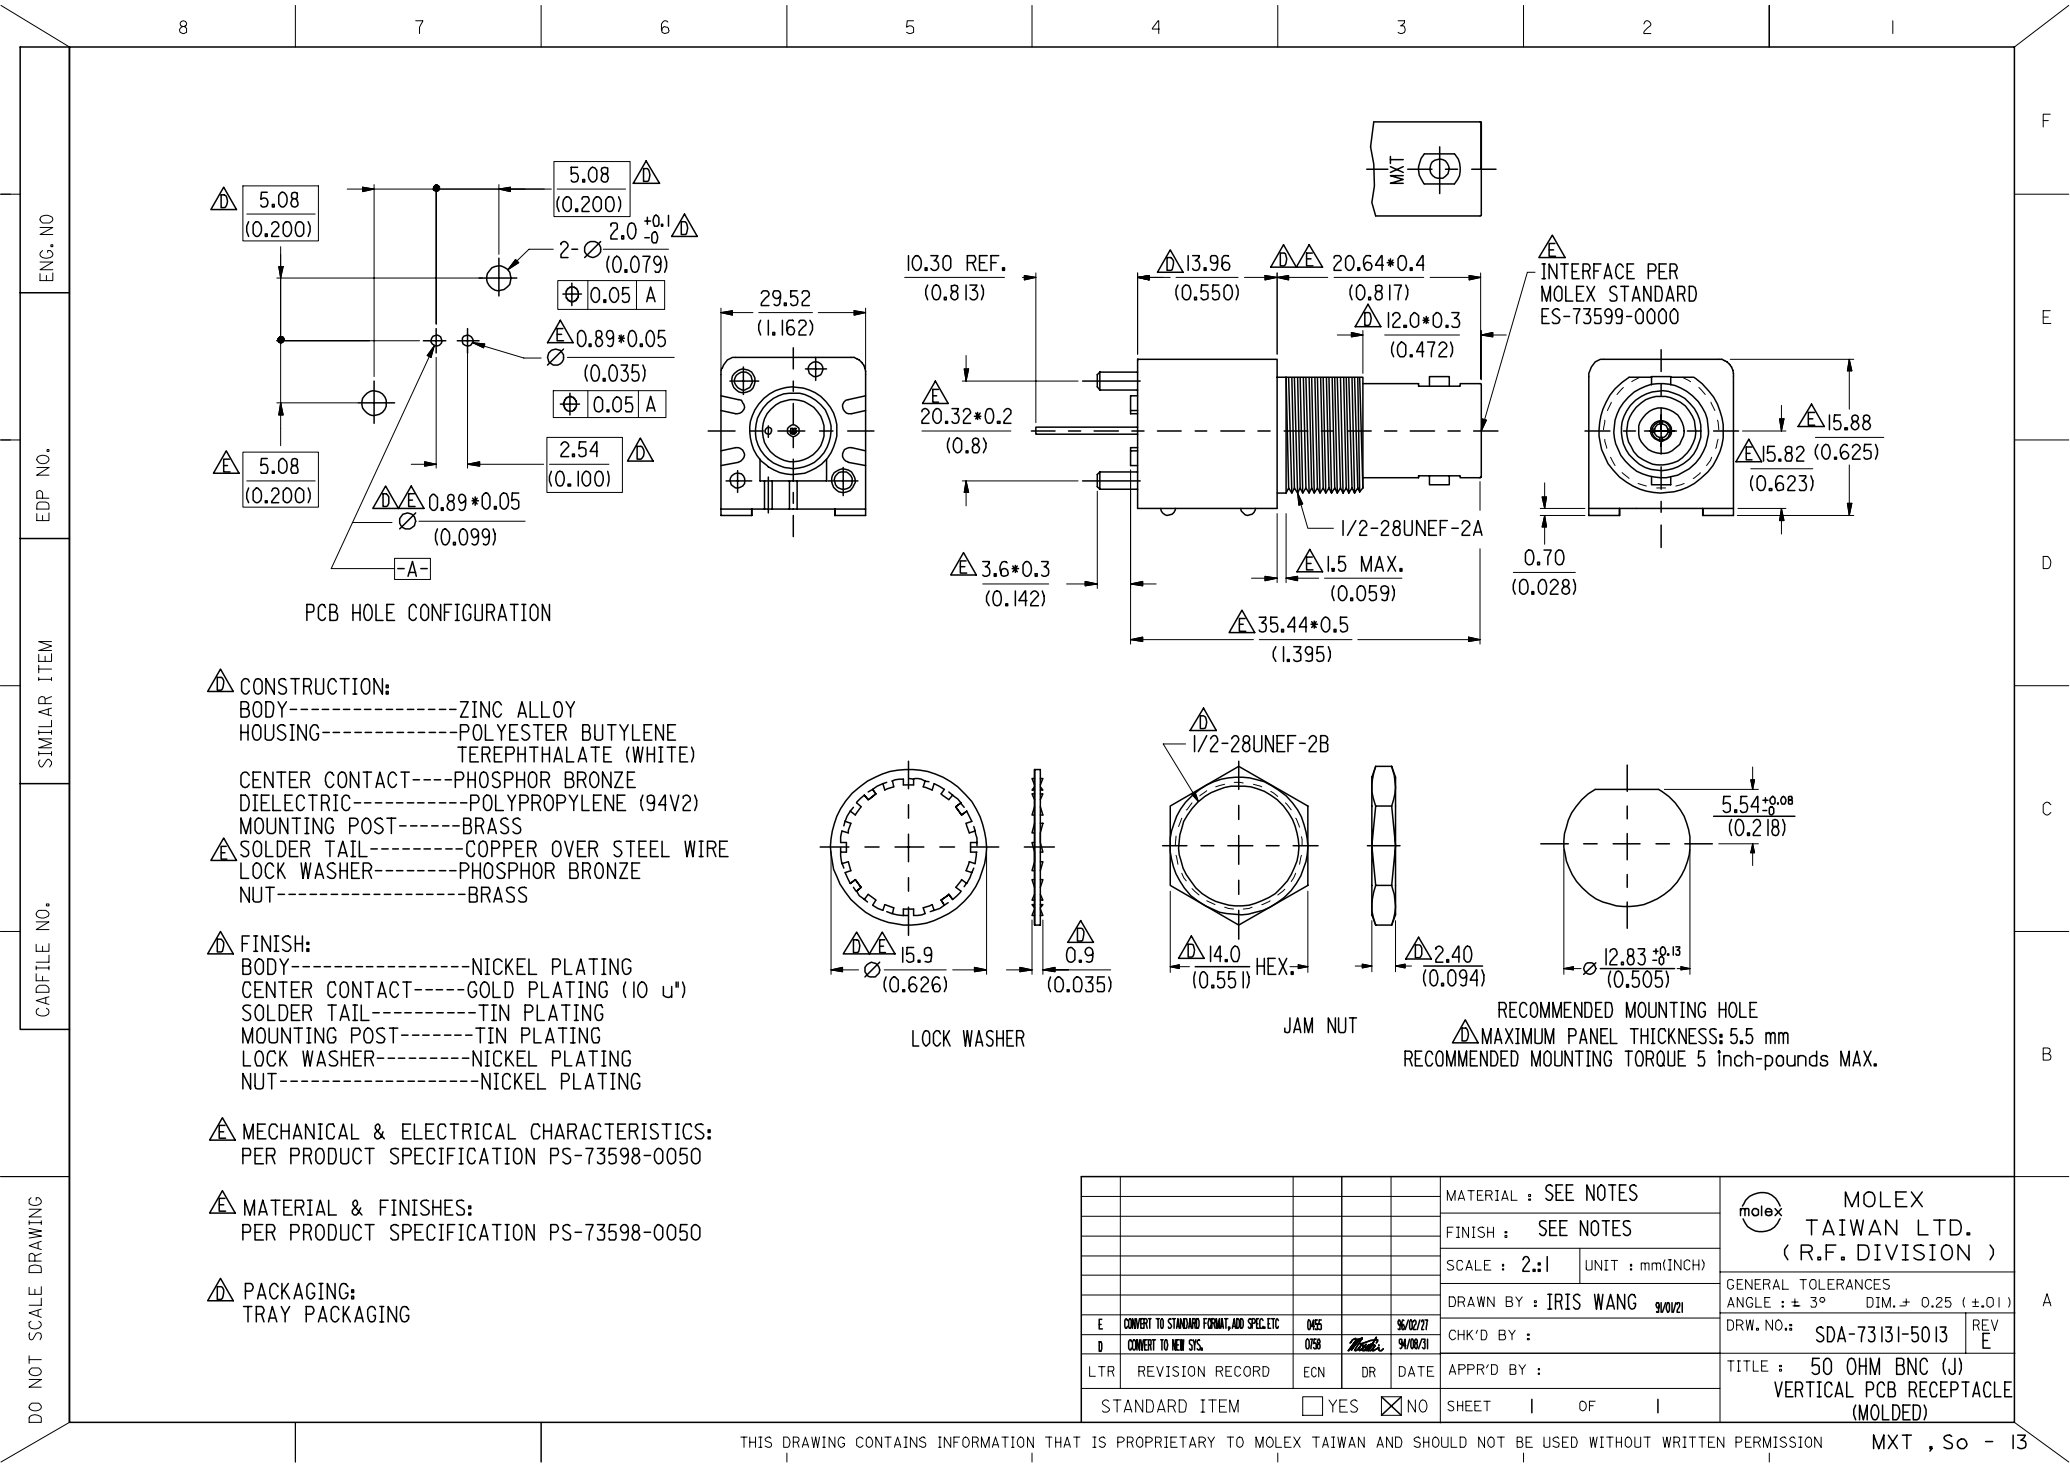


ENG. NO.

EDP NO.

SIMILAR ITEM

CADFILE NO.

DO NOT SCALE DRAWING

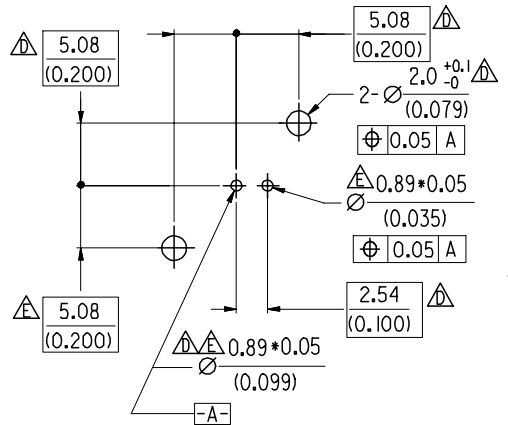


PCB HOLE CONFIGURATION

- CONSTRUCTION:
- BODY-----ZINC ALLOY
 - HOUSING-----POLYESTER BUTYLENE TEREPHTHALATE (WHITE)
 - CENTER CONTACT-----PHOSPHOR BRONZE
 - DIELECTRIC-----POLYPROPYLENE (94V2)
 - MOUNTING POST-----BRASS
- SOLDER TAIL-----COPPER OVER STEEL WIRE
- LOCK WASHER-----PHOSPHOR BRONZE
- NUT-----BRASS
- FINISH:
- BODY-----NICKEL PLATING
 - CENTER CONTACT-----GOLD PLATING (10 U')
 - SOLDER TAIL-----TIN PLATING
 - MOUNTING POST-----TIN PLATING
 - LOCK WASHER-----NICKEL PLATING
 - NUT-----NICKEL PLATING


MECHANICAL & ELECTRICAL CHARACTERISTICS:
PER PRODUCT SPECIFICATION PS-73598-0050

MATERIAL & FINISHES:
PER PRODUCT SPECIFICATION PS-73598-0050


PACKAGING:
TRAY PACKAGING

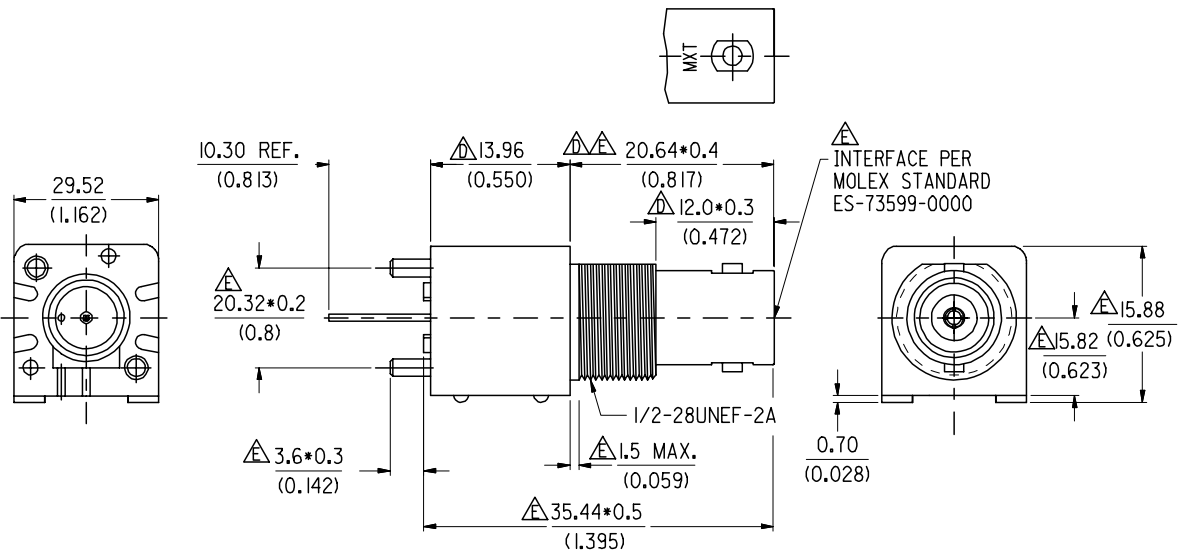


INTERFACE PER
MOLEX STANDARD
ES-73599-0000

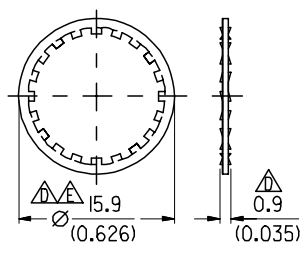

LOCK WASHER

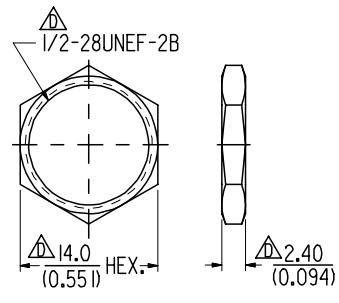

JAM NUT



RECOMMENDED MOUNTING HOLE
MAXIMUM PANEL THICKNESS: 5.5 mm
RECOMMENDED MOUNTING TORQUE 5 inch-pounds MAX.

						MATERIAL : SEE NOTES	 MOLEX TAIWAN LTD. (R.F. DIVISION)	
						FINISH : SEE NOTES		
						SCALE : 2:1		UNIT : mm(INCH)
						DRAWN BY : IRIS WANG 94/01/21		
E	CONVERT TO STANDARD FORMAT, ADD SPEC. ETC	YES			96/02/27	GENERAL TOLERANCES		
D	CONVERT TO NEW SYS.	YES	<i>Mob.</i>		94/08/31	ANGLE : ± 3° DIM. ± 0.25 (±.01)		
LTR	REVISION RECORD	ECN	DR	DATE	CHK'D BY :		DRW. NO.: SDA-73131-5013	REV E
STANDARD ITEM					☐ YES	☒ NO	TITLE : 50 OHM BNC (J)	
							VERTICAL PCB RECEPTACLE (MOLDED)	