





MATERIALS AND FINISHES

BODY STAINLESS STEEL
PLATED GOLD (SEE TABLE)


COUPLING NUT STAINLESS STEEL
PASSIVATED

CENTER CONTACT BRASS
PLATED GOLD (30 MICROINCHES MIN)

INSULATOR TEFLON

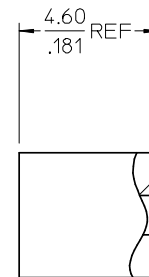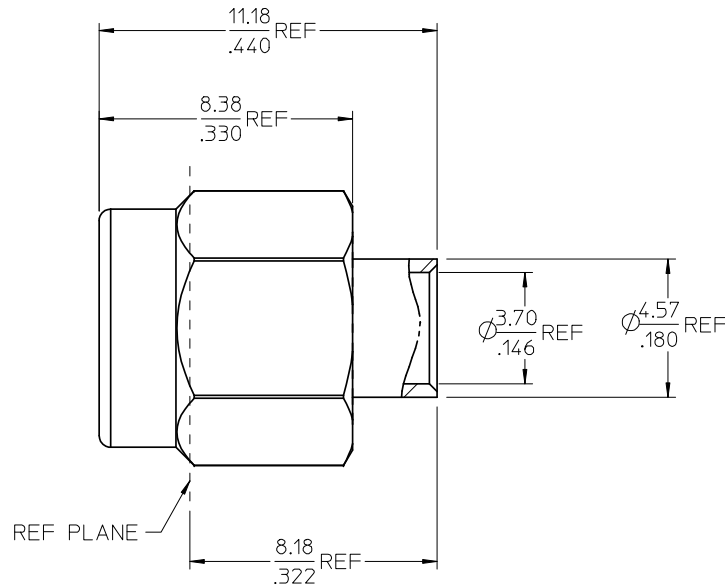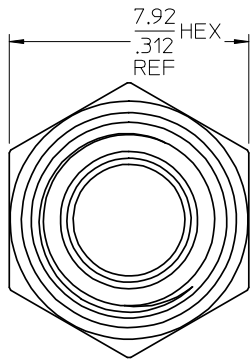

INSULATOR

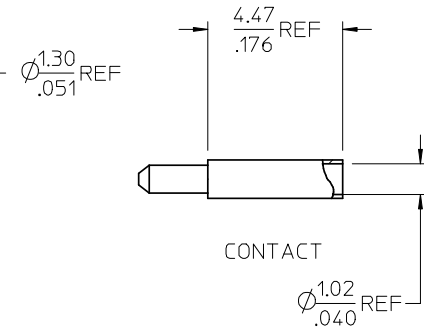

CONTACT

PS-89675-1100	ELECTRO/MECH PERFORM.
ES-89675-1520	CABLE ASSY. INSTR.
MIL-STD-348A, FIG. 310.1	INTERFACE
SPECIFICATION	DESCRIPTION

73251-0033	BY BAG	30 MICROINCHES
73251-0032	BY TRAY (20 CAV)	10 MICROINCHES
73251-0031	BY BAG	10 MICROINCHES
PART NO.	PACKAGING	FINISH THICKNESS

CHG: ADDED P/N
73251-0033

EC NO: URF2009-0073
2008/08/11
DRWN:ROBERTSON
CHKD:SSS
APPR:JWIENER
2008/08/12

REV
A4

QUALITY SYMBOLS
=0
=0

DESCRIPTION

GENERAL TOLERANCES (UNLESS SPECIFIED)
mm INCH
4 PLACES ± --- ± ---
3 PLACES ± --- ± ---
2 PLACES ± --- ± ---
1 PLACE ± --- ± ---
ANGULAR ± 1 °
DRAFT WHERE APPLICABLE
MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE
MM/IN

DRAWN BY
NB J

CHECKED BY
DHG

APPROVED BY
GMH

MATERIAL NO.
SEE TABLE

SIZE
C

DIMENSION STYLE
MM/IN

DATE
1997/12/01

DATE
1998/01/05

DATE
1998/01/06

DOCUMENT NO.
SD-73251-003

SHEET NO.
1 OF 1

SCALE

DESIGN UNITS
METRIC

THIRD ANGLE PROJECTION

MOLEX

MOLEX INCORPORATED

TITLE
SMA PLUG, SOLDER TYPE
FOR RG402 CABLE, 50 OHMS
SMA-PC