

MATERIALS AND FINISHES


BODY, JAM NUT, CRIMP TUBE BRASS
PLATED PLATED GOLD

CENTER CONTACT BERYLLIUM COPPER
PLATED GOLD








INSULATOR TEFLON

LOCKWASHER PHOSPHER BRONZE
PLATED GOLD

SHRINK TUBE BLACK

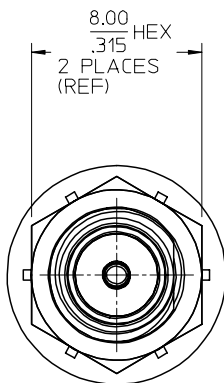

SMA JACK
INTERFACE

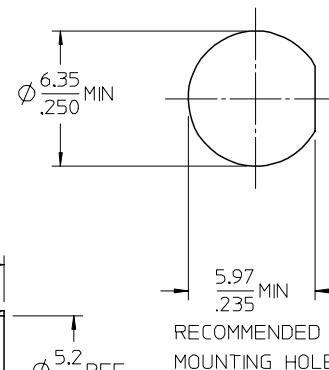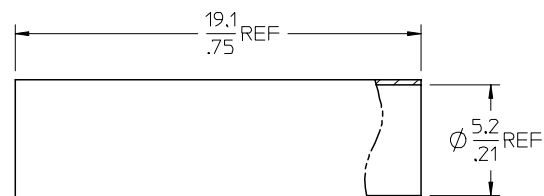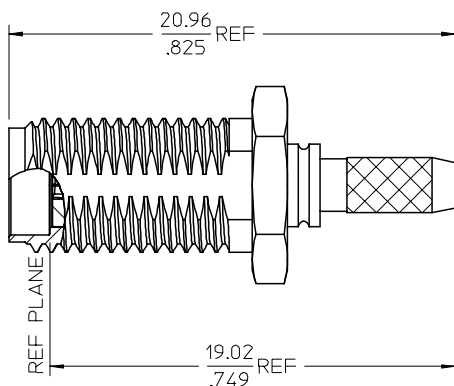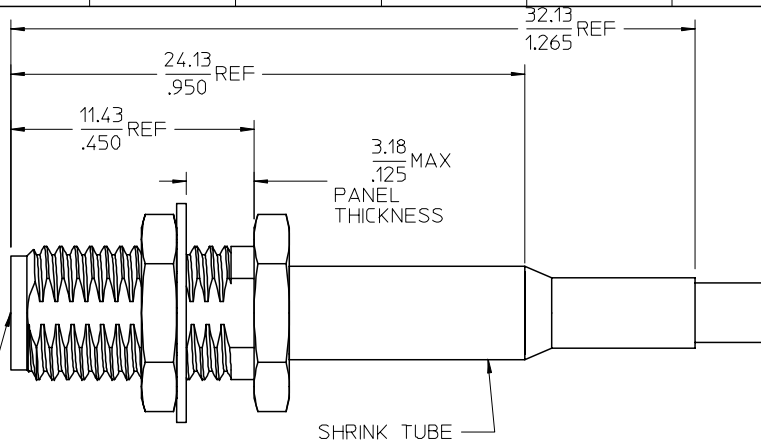

ES-89675-2100	ELECTRO/MECH PERFORM.
ES-89675-1640	ASSEMBLY INSTRUCT.
MIL-STD-348A, FIG. 310.2	INTERFACE
SPECIFICATION	DESCRIPTION

73251-0933	P/N 73251-0930, BY TRAY (20CAV.)
73251-0932	P/N 73251-0930, ONE PER BAG
73251-0931	WITHOUT SHRINK TUBE
73251-0930	WITH SHRINK TUBE
PART NO.	PACKAGING

CHG: ADDED -0933
EC NO: URF2007-0406
DRAWN BY: DRW:WELIN
CHKD: 2007/05/24
APPR: MHIANG
REV: 2007/05/25

QUALITY
SYMBOLS
=0
=0

GENERAL TOLERANCES (UNLESS SPECIFIED)	
mm	INCH
4 PLACES ± .005	± .0004
3 PLACES ± .003	± .0002
2 PLACES ± .002	± .0001
1 PLACE ± .001	± .00005
ANGULAR ± 2 °	

DIMENSION STYLE MM/IN	
DRAWN BY	DATE
TEF	2002/04/03
CHECKED BY	DATE
SSS	2002/04/03
APPROVED BY	DATE
GMH	2002/04/03
MATERIAL NO.	

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	METRIC	

SMA JACK, BLKHD, RG316
50 OHMS, EWR-1691
SMA-JC

MOLEX INCORPORATED

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

SEE TABLE

SD-73251-093

SHEET NO.
1 OF 1