

MATERIALS AND FINISHES




BODY BRASS
PLATED GOLD

CENTER CONTACT BERYLLIUM COPPER
PLATED GOLD

INSULATOR TEFLON

PACKAGING: TRAY

WILL WITHSTAND REFLOW
TEMPERATURE OF
265 DEG C ±5 DEG

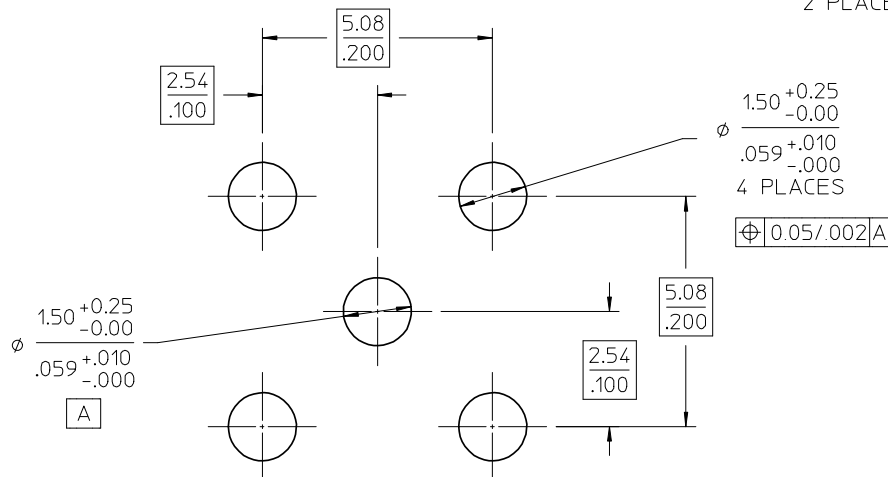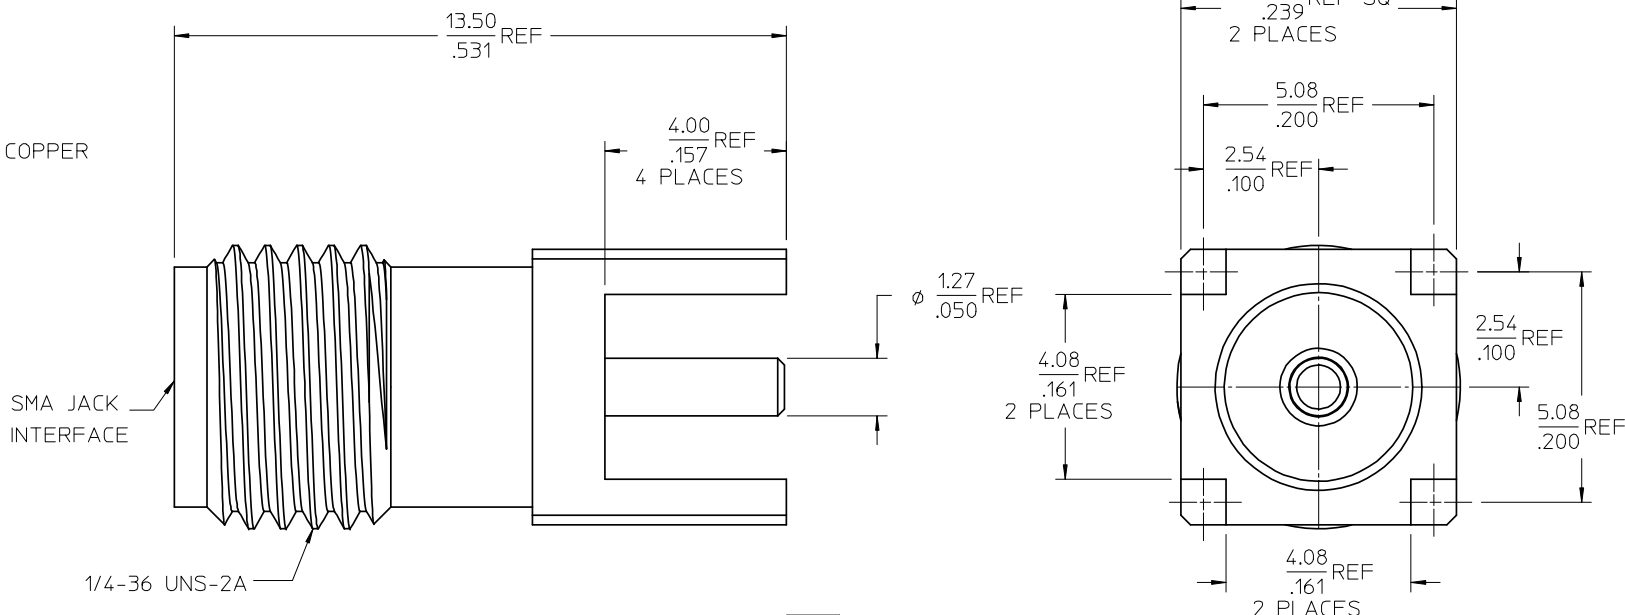

73251-3141	73391-0060 BY TRAY (20 CAV.)
73251-3140	73391-0060, ONE PER BAG
73391-0060	BULK
PART NO.	PACKAGING

PS-73436-009	ELECTRO/MECH. PERFORM.
SPECIFICATION	DESCRIPTION

CHG: ADD REFLOW
TEMPERATURE NOTE

EC NO: URF2008-0373
DRAWN: JWIENER 2008/01/21
CHKD: ROBERTSON 2008/01/21
APPR: JWIENER 2008/01/21

QUALITY
SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± .005	± .0005
3 PLACES	± .005	± .0005
2 PLACES	± .005	± .0005
1 PLACE	± .005	± .0005

ANGULAR ± 2 °

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM/IN

DRAWN BY	DATE
IRIS WANG	1997/5/30
CHECKED BY	DATE
BEN LEE	1999/2/22
APPROVED BY	DATE
MISEN	1999/2/22

MATERIAL NO.
SEE TABLE

SCALE
DESIGN UNITS
METRIC

THIRD ANGLE
PROJECTION

SMA JACK VERTICAL
SMA-J/PCB

MOLEX INCORPORATED

DOCUMENT NO.
SD-73391-0060

SHEET NO.
1 OF 1