


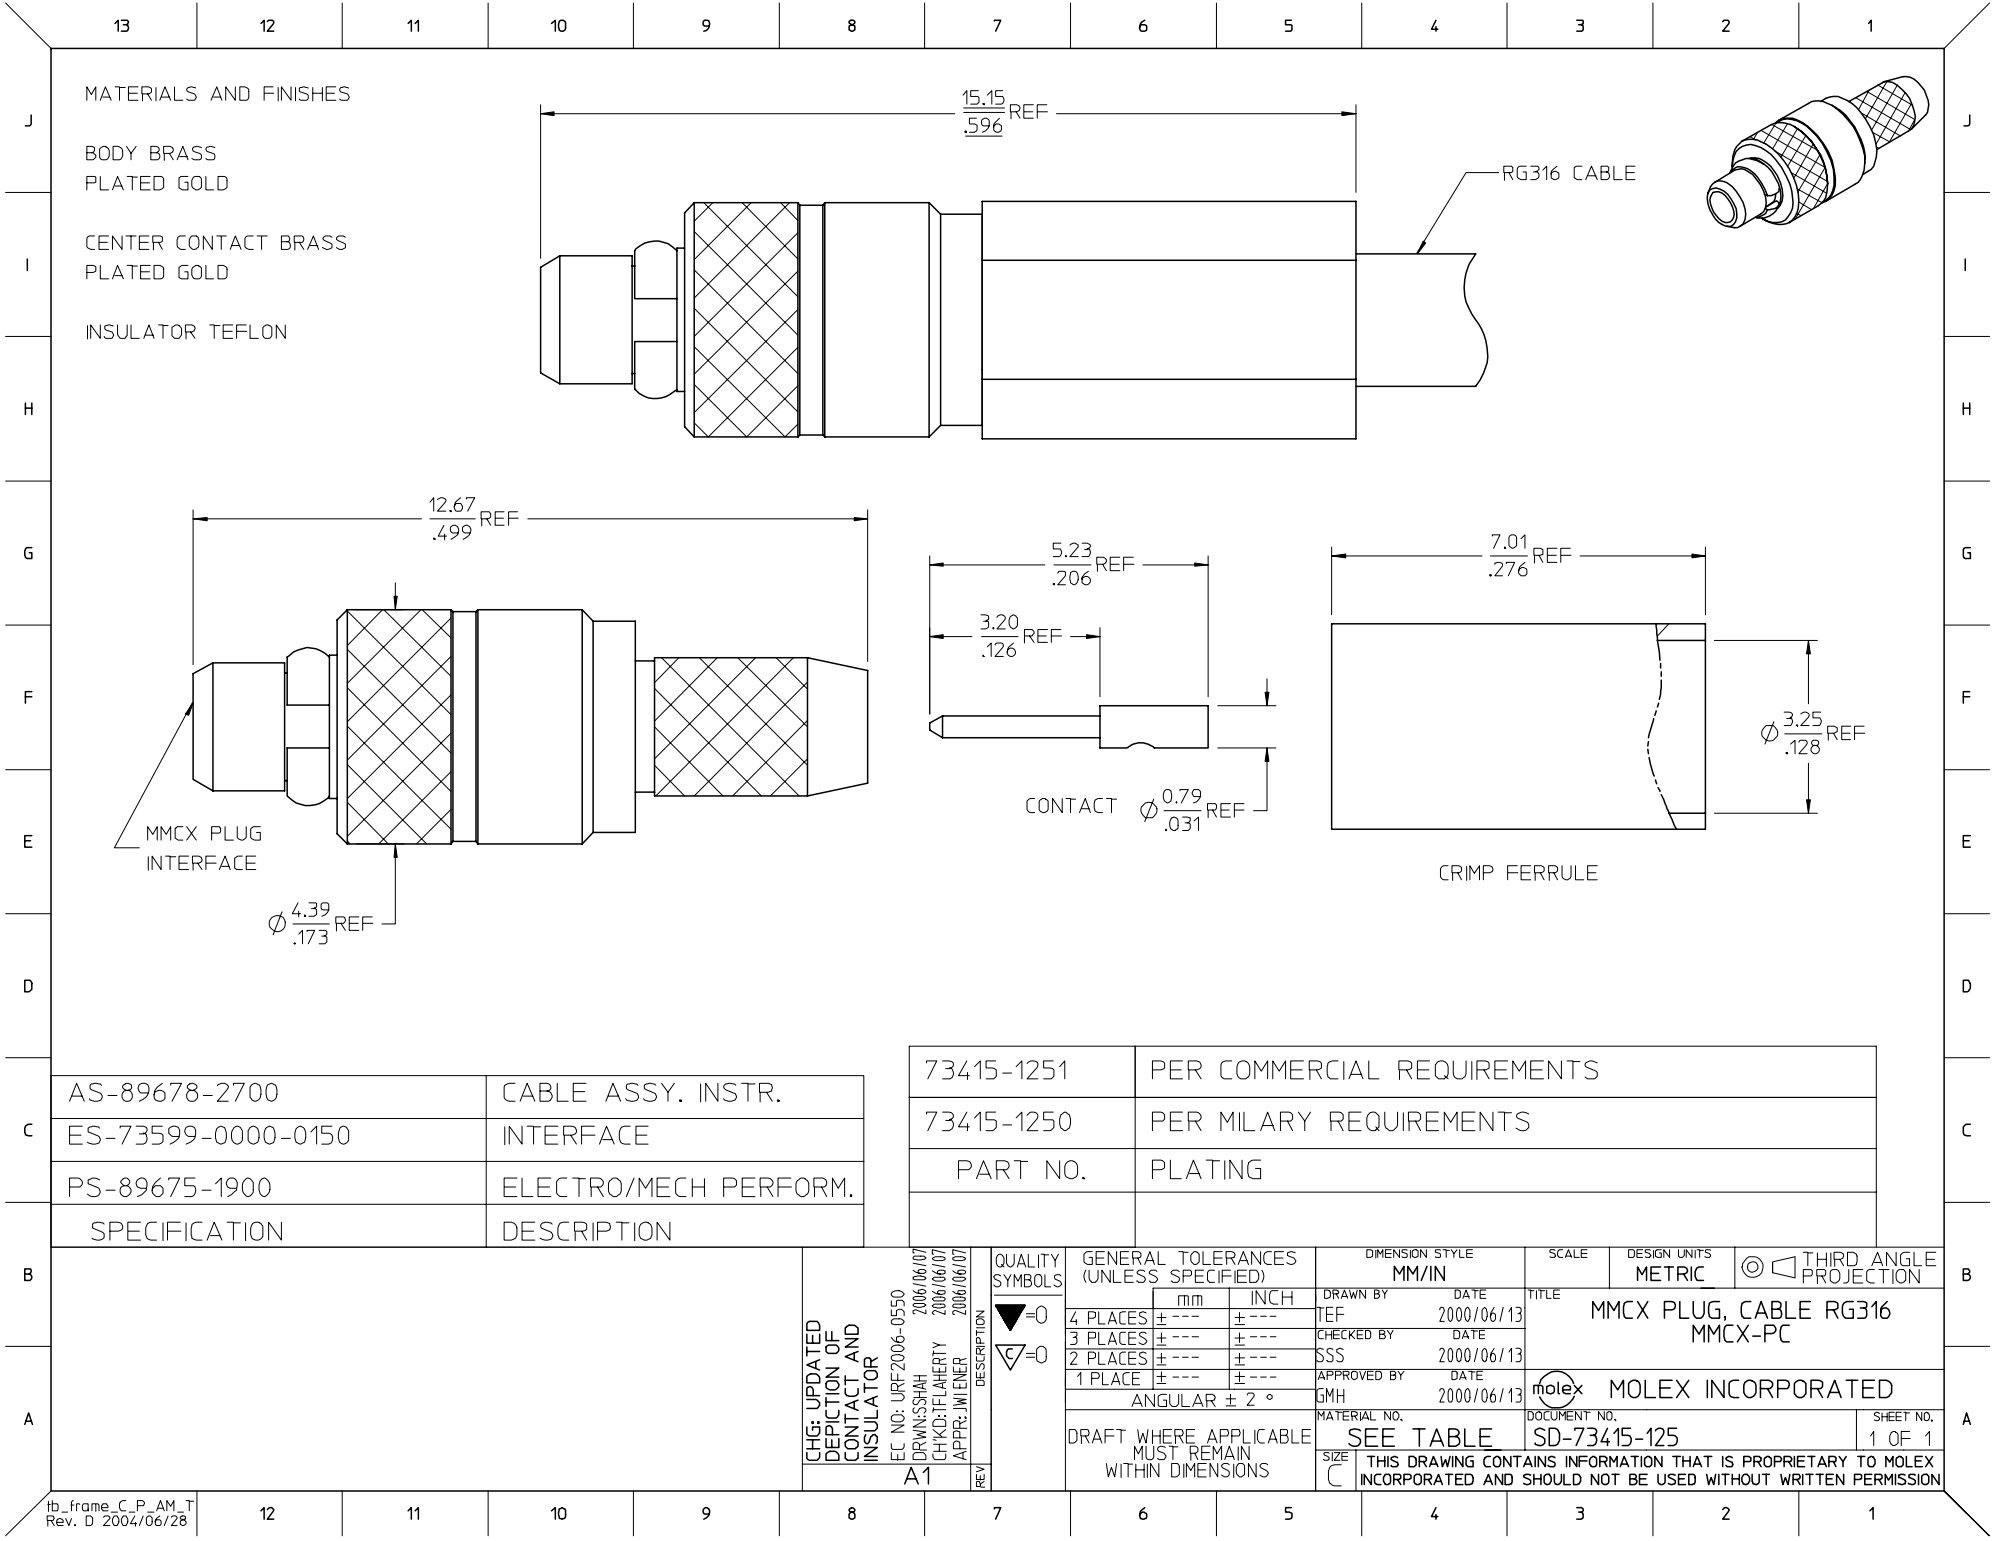

AS-89678-2700	CABLE ASSY. INSTR.
ES-73599-0000-0150	INTERFACE
PS-89675-1900	ELECTRO/MECH PERFORM.
SPECIFICATION	DESCRIPTION

73415-1251	PER COMMERCIAL REQUIREMENTS
73415-1250	PER MILARY REQUIREMENTS
PART NO.	PLATING

B	A	CHG: UPDATED DEPICTION OF CONTACT AND INSULATOR A1	REV	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION		B		
											METRIC				MMCX PLUG, CABLE RG316 MMCX-PC	
										DRAWN BY		DATE				
						4 PLACES ± --- ± ---		TEF		2000/06/13						
						3 PLACES ± --- ± ---		CHECKED BY		DATE						
						2 PLACES ± --- ± ---		SSS		2000/06/13						
						1 PLACE ± --- ± ---		APPROVED BY		DATE						
						ANGULAR ± 2 °		GMH		2000/06/13						
						DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		DOCUMENT NO.		SHEET NO.				
								SEE TABLE		SD-73415-125		1 OF 1				
		SIZE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								A				
		C														