

13 12 11 10 9 8 7 6 5 4 3 2 1

MATERIALS AND FINISHES







BODY ZINC ALLOY
PLATED GOLD

CENTER CONTACT BRASS
PLATED GOLD

INSULATOR TEFLON

OUTER CONTACT BERYLLIUM COPPER
PLATED GOLD

CRIMP TUBE BRASS
PLATED GOLD

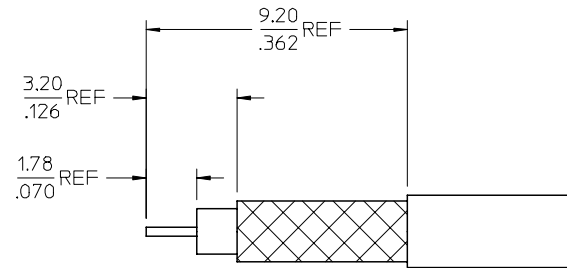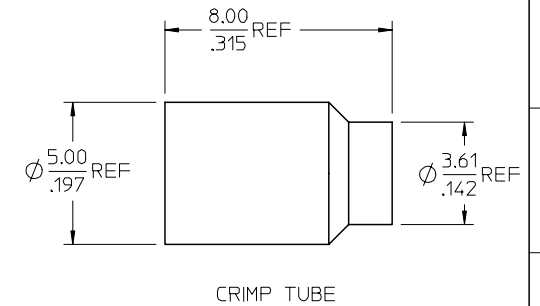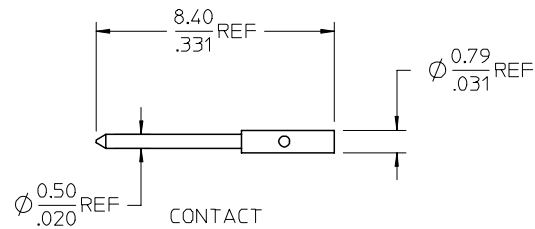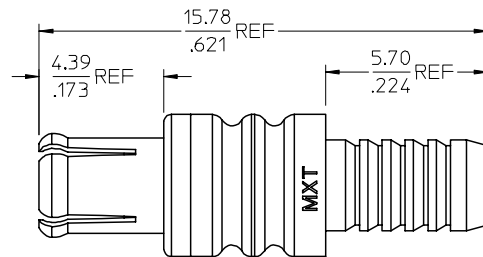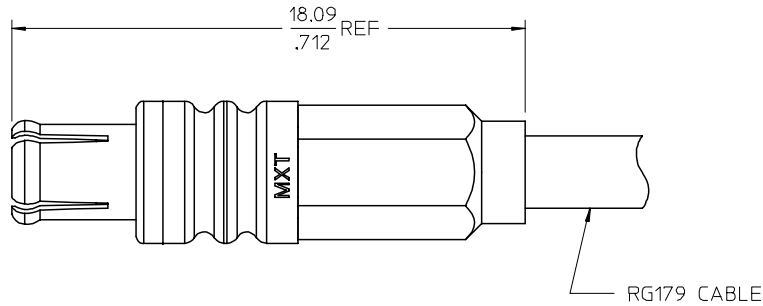

RECOMMENDED CABLE
STRIPPING DIMENSIONS

PART #73415-4490

AS-73392-0060

CABLE ASSEMBLY INSTR.

SPECIFICATION

DESCRIPTION

CHG: UPDATED
REDREW TO SHOW
REVISED CRIMP
TUBE
EC NO: URF2006-0462
DRAWN: TELAHERTY 2006/04/18
CHKD: SHAH 2006/04/18
APPR: JIM ENER 2006/04/18
A2

QUALITY
SYMBOLS
=0
=0

GENERAL TOLERANCES
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± .005	± .0005
3 PLACES	± .004	± .0004
2 PLACES	± .003	± .0003
1 PLACE	± .002	± .0002

ANGULAR ± 2 °

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM/IN

DRAWN BY	DATE
TEF	2003/08/11
CHECKED BY	DATE
SSS	2003/08/11
APPROVED BY	DATE
GMH	2003/08/11

MATERIAL NO.
734154490

SIZE
C

SCALE

DESIGN UNITS
METRIC

THIRD ANGLE
PROJECTION

MCX, PLUG STR FOR RG179
75 OHMS, EWR-2114
MCX-PC

MOLEX INCORPORATED

DOCUMENT NO.
SD-73415-449

SHEET NO.
1 OF 1