


CUSTOMER: CISCO


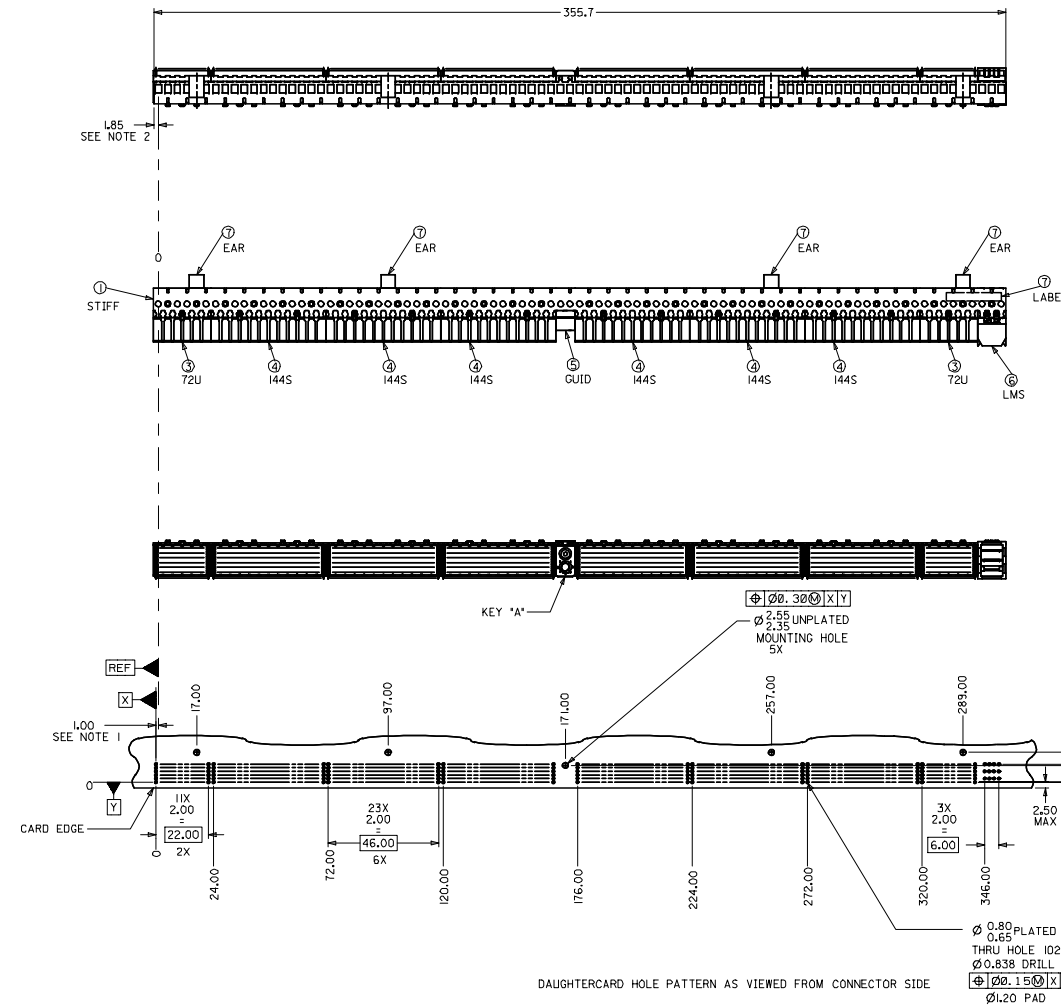


DAUGHTERCARD HOLE PATTERN AS VIEWED FROM CONNECTOR SIDE

ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	73664-0356	STIFFENER
2	5	73726-0000	MOUNTING SCREW
3	2	73632-0120	72 POS. SIGNAL, UNSHIELDED
4	6	73632-1020	144 POS. SIGNAL, SHIELDED
5	1	73660-0000	GUIDE MODULE, KEY A
6	1	73651-0233	POWER MODULE, TYPE LMS
7	4	73665-0000	MOUNTING EAR
8	1	73728-0000	CUSTOM LABEL

- NOTES: 1. DISTANCE FROM 'REF' PLANE TO FIRST SIGNAL CONTACT.
2. DISTANCE FROM 'REF' PLANE TO LEFT END OF STIFFENER.
3. DIMENSIONS ARE IN MILLIMETERS.
4. THIS PRODUCT CONFORMS TO MOLEX PRODUCT SPECIFICATION PS-73670-9999.
5. NON-TOLERANCED DIMENSIONS ARE BASIC.
6. FINISH:
0.75 MICROMETERS MINIMUM SELECTIVE GOLD (Au) IN MATING AREA
2.50 MICROMETERS MINIMUM SELECTIVE TIN (Sn) IN TAIL AREA
NICKEL (Ni) UNDERPLATE OVERALL.
7. PACKAGED PER PK-70873-0820.
8. THE S-LETTER TYPE CODE REFERS TO BLADE LENGTH IN ROWS B, D, & F, RESPECTIVELY.
S=SHORT, M=MEDIUM, & L=LONG.
9. THIS PART CONFORMS TO CLASS 'B' REQUIREMENTS OF MOLEX COSMETIC SPECIFICATION PS-45499-002.

DETAIL 'B'
KEYING BUSHING LOCATIONS



MODIFY FINISH EC NO: UCP2007-2320 DRAWN BY: STEWART CHECKED BY: APPROVED BY: MWA DATE: 2007/01/02 DATE: 2007/01/02 DATE: 2007/01/03	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± --- ± --- ANGULAR ±1/2°	DIMENSION STYLE MM ONLY DRAWN BY DATE JPB 1999/04/22 CHECKED BY DATE SMR 1999/04/22 APPROVED BY DATE CAB 1999/04/22	SCALE 1:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	HDM PLUS DAUGHTERCARD SALES ASSEMBLY	 MOLEX INCORPORATED	MATERIAL NO. 73670-0267	DOCUMENT NO. SDA-73670-0267	SHEET NO. 1 OF 1
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS											
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											