


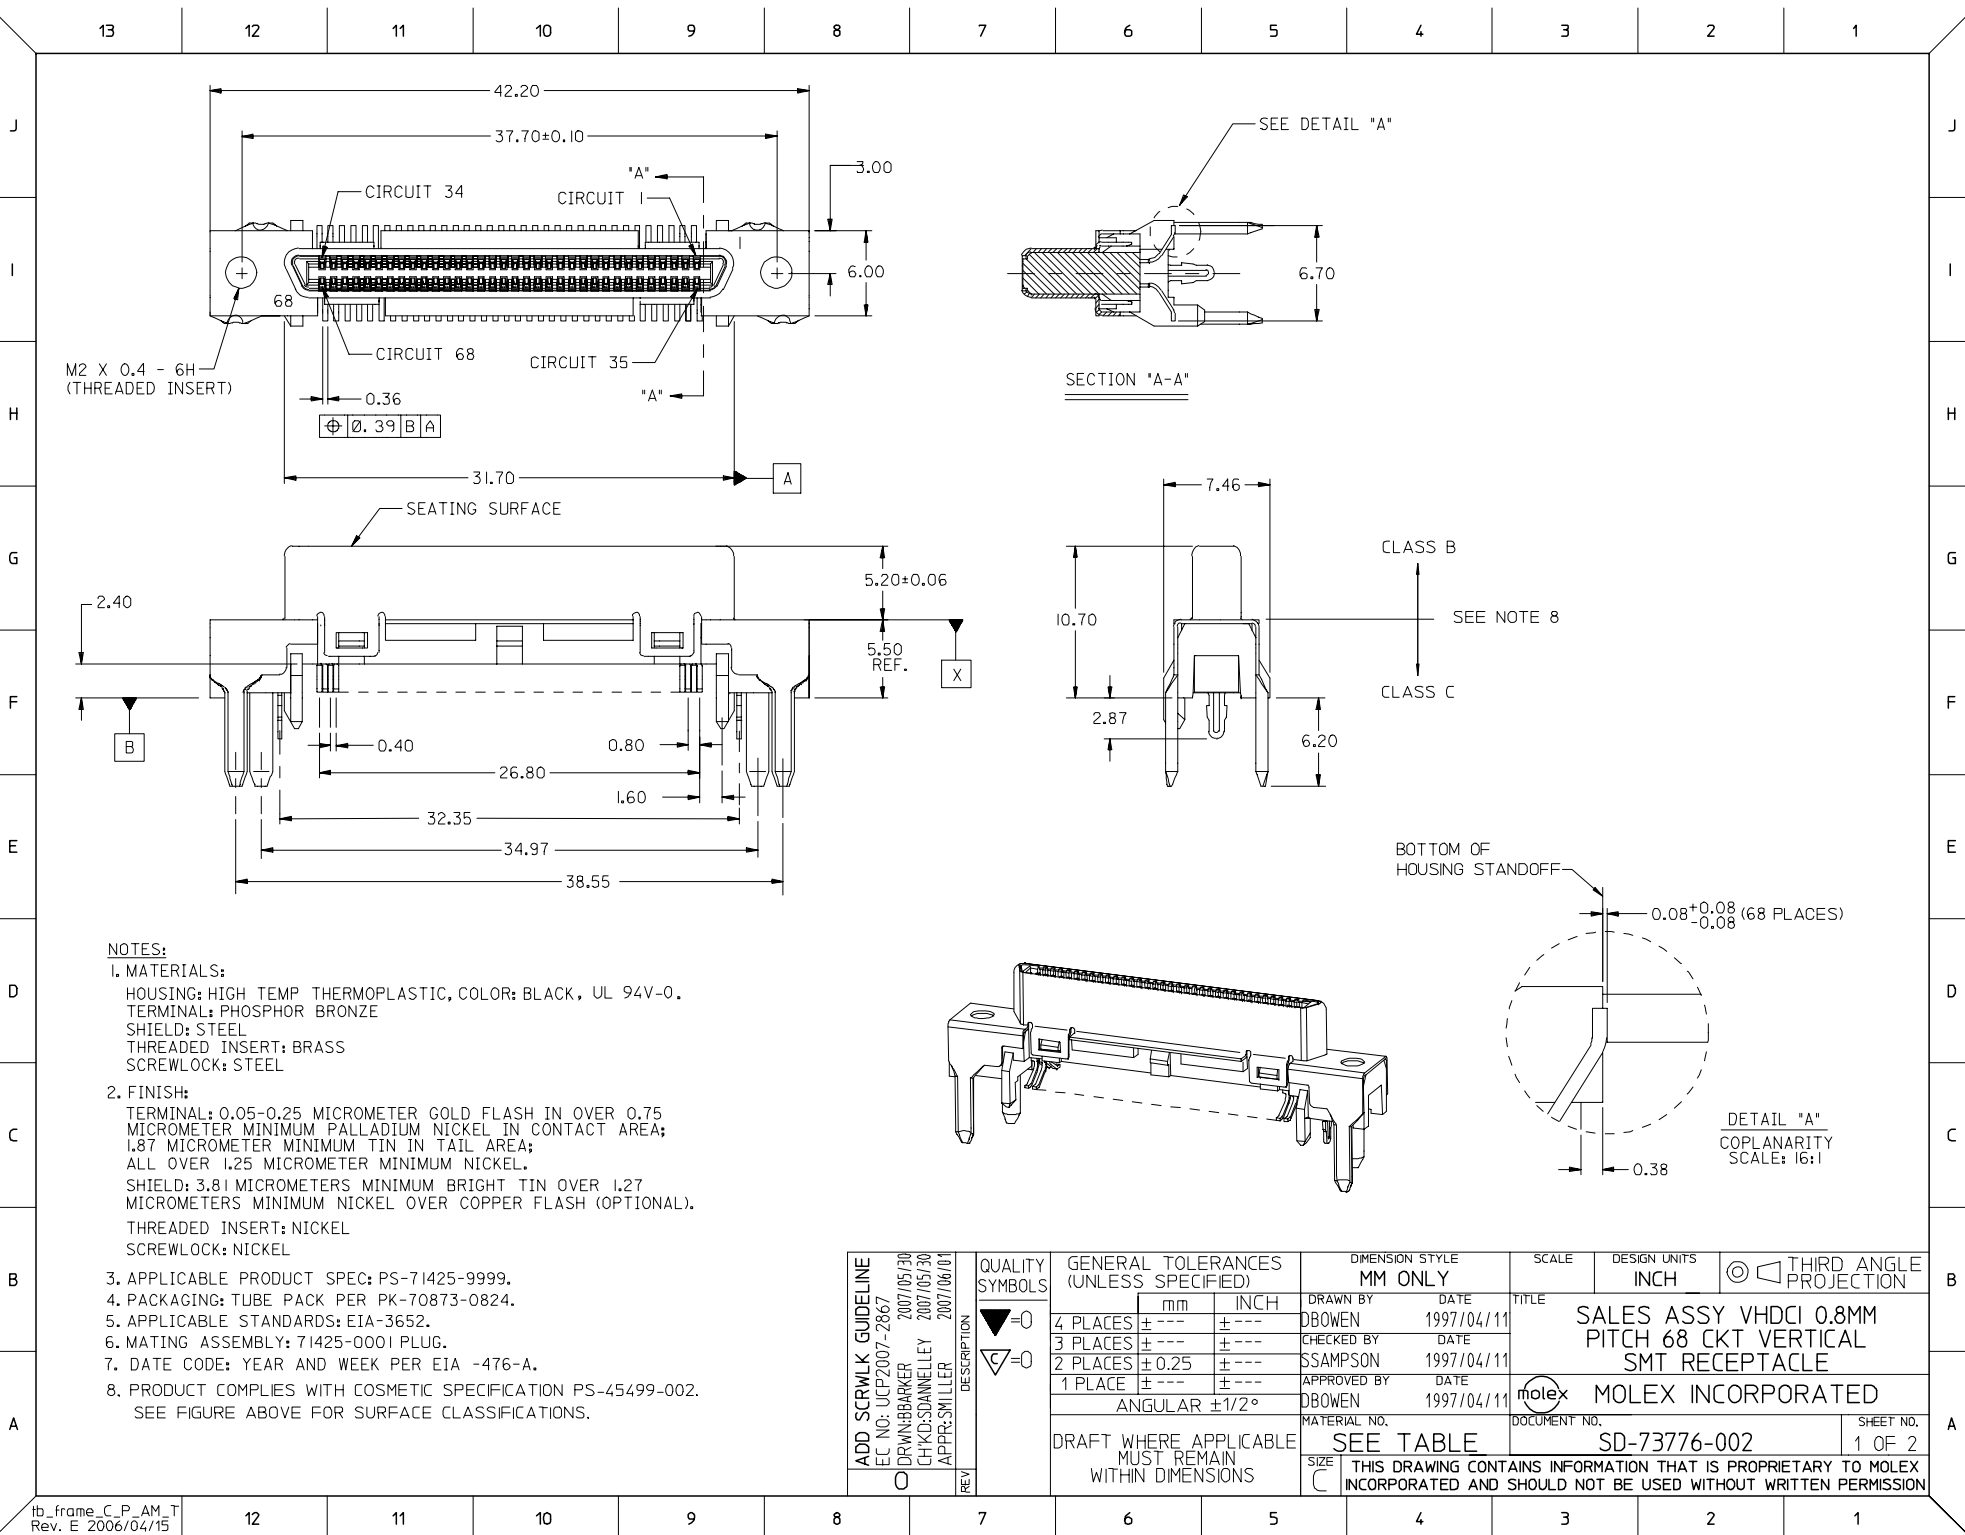

NOTES:

1. MATERIALS:

HOUSING: HIGH TEMP THERMOPLASTIC, COLOR: BLACK, UL 94V-0.
TERMINAL: PHOSPHOR BRONZE
SHIELD: STEEL
THREADED INSERT: BRASS
SCREWLOCK: STEEL

2. FINISH:

TERMINAL: 0.05-0.25 MICROMETER GOLD FLASH IN OVER 0.75
MICROMETER MINIMUM PALLADIUM NICKEL IN CONTACT AREA;
1.87 MICROMETER MINIMUM TIN IN TAIL AREA;
ALL OVER 1.25 MICROMETER MINIMUM NICKEL.
SHIELD: 3.81 MICROMETERS MINIMUM BRIGHT TIN OVER 1.27
MICROMETERS MINIMUM NICKEL OVER COPPER FLASH (OPTIONAL).
THREADED INSERT: NICKEL
SCREWLOCK: NICKEL

3. APPLICABLE PRODUCT SPEC: PS-71425-9999.

4. PACKAGING: TUBE PACK PER PK-70873-0824.

5. APPLICABLE STANDARDS: EIA-3652.

6. MATING ASSEMBLY: 71425-0001 PLUG.

7. DATE CODE: YEAR AND WEEK PER EIA -476-A.

8. PRODUCT COMPLIES WITH COSMETIC SPECIFICATION PS-45499-002.
SEE FIGURE ABOVE FOR SURFACE CLASSIFICATIONS.

ADD SCRWLK GUIDELINE EC NO: UCP2007-2867 DRAWN BY: DBOWEN 2007/05/30 CHKD: SDANALLEY 2007/05/30 APPR: SMILLER 2007/06/01 REV: 0	QUALITY SYMBOLS ▽=0 ▽=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY	DATE	TITLE		
			4 PLACES	± ---	± ---	DBOWEN	1997/04/11	SALES ASSY VHDCI 0.8MM PITCH 68 CKT VERTICAL SMT RECEPTACLE		
			3 PLACES	± ---	± ---	CHECKED BY	DATE	MOLEX INCORPORATED		
			2 PLACES	± 0.25	± ---	SSAMPSON	1997/04/11	SD-73776-002		
			1 PLACE	± ---	± ---	APPROVED BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
			ANGULAR ±1/2°		DBOWEN	1997/04/11				
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		DOCUMENT NO.			SHEET NO. 1 OF 2
					SEE TABLE		SD-73776-002			
					SIZE C					

