

Stripp Block for Snap Mounting with 4 IEC Appliance Outlets C14 and space for 2 extra components



Snap-In Version

4758

Quadblock + Two



70 °C



Description

- Panel Mount:
Snap-in version from front side
- 4 Functions:
Module of 4 outlets, with additional carrier frame for accessory modules, Pin temperature 70 °C, Protection class I
- Solder terminals or quick connect terminals

Approvals

- VDE License Number: 40010521
- UL License Number: E96454
- CSA License Number: 56242

Characteristics

- Busbar is of single piece (no soldering)
- Insulation cover on the rear-side
- Qualified for use in equipment according IEC/EN 60950

Other versions on request

- For protection class II

References

[General Product Information](#)

Weblinks


[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

Technical Data

Ratings IEC	10A / 250VAC; 50Hz
Ratings UL/CSA	15A / 250VAC; 60Hz
Dielectric Strength	> 2 kVAC between L-N > 2 kVAC between L/N-PE (1 min/50 Hz)
Allowable Operation Temp.	-25 °C to 70 °C
Degree of Protection	from front side IP 30 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	Solder terminals or quick connect terminals
Panel Thickness s	Snap-in 1/ 1.2/ 1.5/ 2/ 2.5/ 3 mm tolerance +0.0/-0.1
Material: Housing	Thermoplastic, black, UL 94V-0

Appliance-Inlet/-Outlet	F acc. to IEC/EN 60320-2-2, UL 498 CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10A, Protection class I
-------------------------	---

Dimensions
Quadbloc + Two 4758
Cut-out for 2 mm Snap-in Inlet

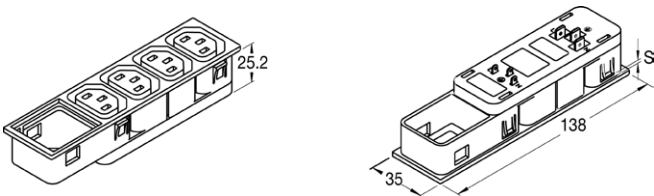

Panel cut-out 134 x 32,5 mm, corner radius max. 5 mm
With power entry module, type 6200 or type 6220

Variants

[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

Panel Thickness s [mm]	Terminal	Length [mm]	Order Number
1	Quick connect terminals 6.3 x 0.8 mm	138	4758.3200
1.2	Quick connect terminals 6.3 x 0.8 mm	138	4758.8200
1.5	Quick connect terminals 6.3 x 0.8 mm	138	4758.4200
2	Quick connect terminals 6.3 x 0.8 mm	138	4758.5200
2.5	Quick connect terminals 6.3 x 0.8 mm	138	4758.6200
3	Quick connect terminals 6.3 x 0.8 mm	138	4758.7200
1	Solder terminals 4 x 0.8 mm	138	4758.3400
1.2	Solder terminals 4 x 0.8 mm	138	4758.8400
1.5	Solder terminals 4 x 0.8 mm	138	4758.4400
2	Solder terminals 4 x 0.8 mm	138	4758.5400
2.5	Solder terminals 4 x 0.8 mm	138	4758.6400
3	Solder terminals 4 x 0.8 mm	138	4758.7400
1	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	138	4758.3000
1.2	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	138	4758.8000
1.5	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	138	4758.4000
2	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	138	4758.5000
2.5	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	138	4758.6000
3	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	138	4758.7000

Please note, all quadblocs are available in protection-class II upon request.
Cord retaining clamp see accessories

Packaging unit 50 Pcs

Required Accessory

Description



6200

IEC Appliance Connector C14 with Fuseholder 1-pole

IP 40, 5 x 20, 1 pole	6200.4120
IP 40, 5 x 20, 1 pole	6200.4220
IP 40, 5 x 20, 1 pole	6200.4320



6220

IEC Appliance Connector C14 with Fuseholder 2-pole

IP 40, 5 x 20, 2-pole	6220.5120
IP 40, 5 x 20, 2-pole	6220.5220
IP 40, 5 x 20, 2-pole	6220.5320

Accessory

Cord retaining kits

Cord retaining strain reliefs



Flat head, Z	0888.0021
Flat head, E	4700.0005
Flat head, G	4700.0007
Flat head, H	4700.0008

Mating Inlets/Plugs

Category / Description

Interconnection Cord



Power Cord with IEC Appliance Plug E, angled, 70°C	0607
Power Cord with IEC Appliance Plug E, angled, 70°C	0608
Power Cord with IEC Appliance Plug E, straight, 70°C	0609
Power Cord with IEC Appliance Plug G, angled, 70°C	607B
Power Cord with IEC Appliance Plug G, angled, 70°C	608B
Power Cord with IEC Appliance Plug G, straight, 70°C	609B

Plug Connector



IEC plug connector E, rewirable, straight, max. cable diameter 8.5 mm	4732
IEC plug connector E, rewirable, angled, max. cable diameter 10 mm	4733
IEC plug connector E, rewirable, straight, max. cable diameter 10 mm	4735
IEC plug connector E, rewirable, angled, max. cable diameter 10 mm	4736
IEC plug connector E, rewirable, straight	9009
IEC plug connector E, rewirable, angled	9013
IEC plug connector E, rewirable, angled	P685