

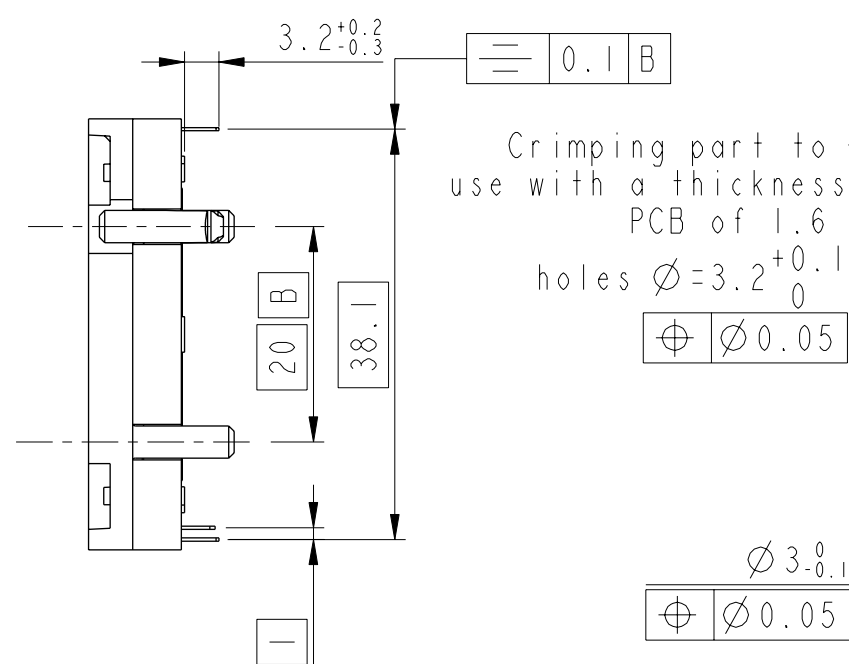
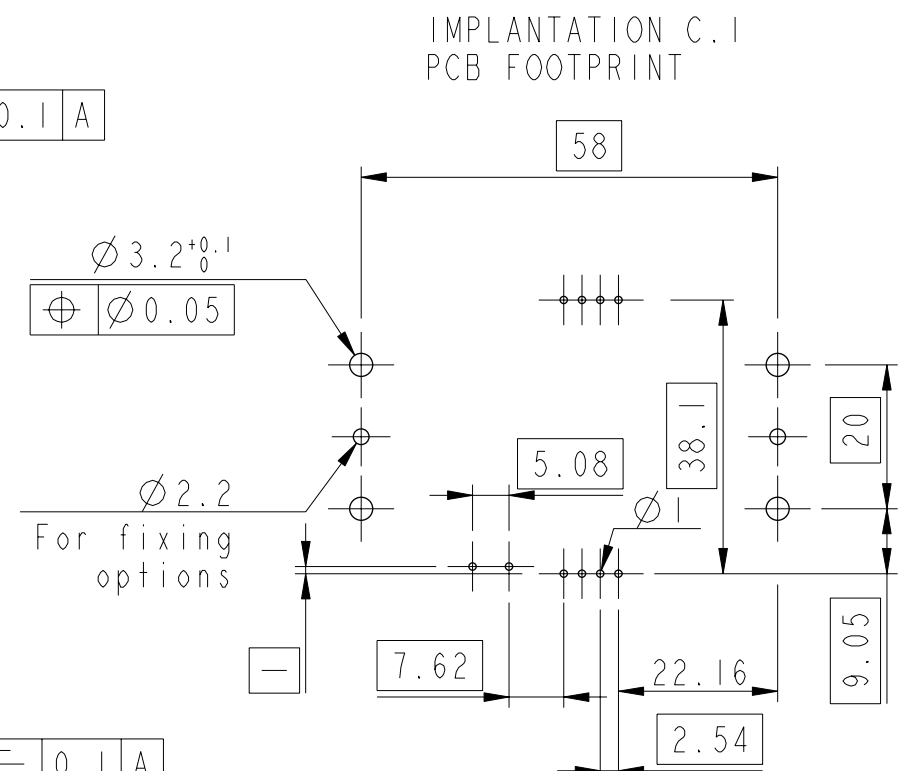


7434L0825S01LF *

* - LEAD FREE version

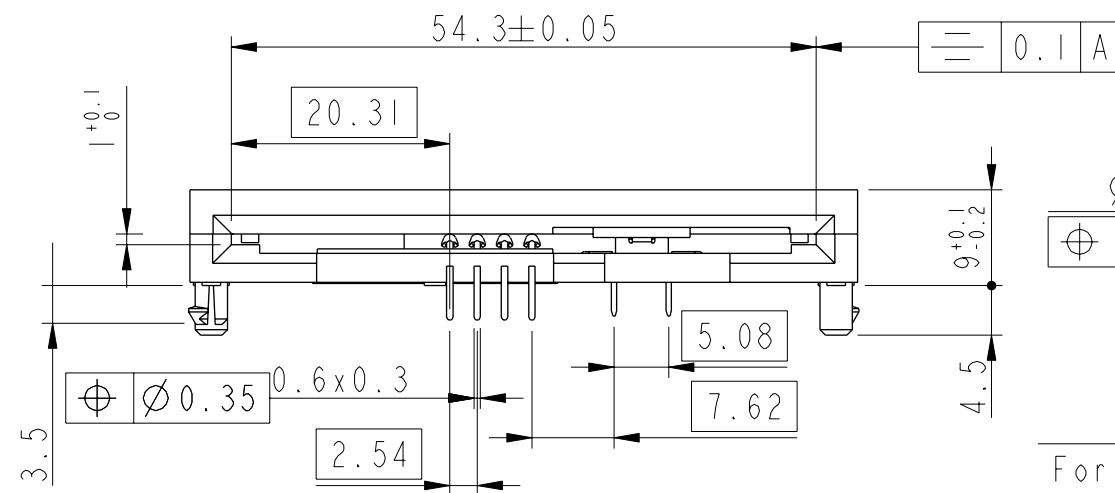

Crimping part to
use with a thickness
PCB of 1.6
holes $\varnothing = 3.2^{+0.1}_0$

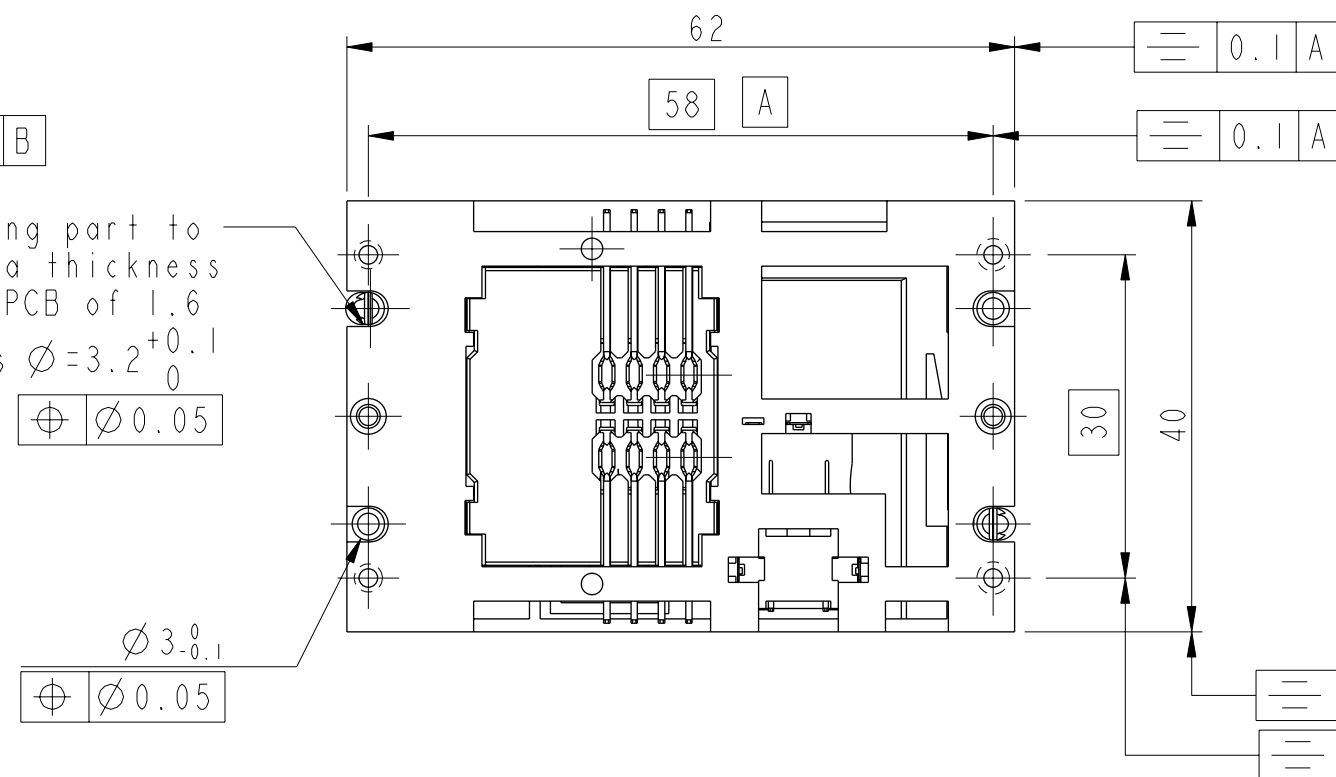





Tol Gen:	0mm to 10mm	± 0.1 mm
	10mm to 30mm	± 0.15 mm
	30mm to 60mm	± 0.2 mm
	60mm and above	± 0.3 mm

LEAD FREE VERSION:

"This product meets European Union Directives and other country regulations as described in GS-22-008"

The housing will withstand exposure to 260°C peak temperature for 10seconds in a wave solder application with a 1.6mm minimum thick circuit board

rev	ecm no	dr	date
A	F20307	DLE	2002/04/25
B	105-0181	DTK	2005/07/20
C	106-0084	SSC	2006/06/21
D	108-0080	SSC	2008/06/28
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com			surface - 		tolerance std ISO:1302 ISO:406 ISO:1101		projection 		 MM		
			TOLERANCES UNLESS OTHERWISE SPECIFIED								
Dr	D.LEGRAND	2002/04/29	ANGULAR	LINEAR	0.X	±	size A3	Scale 3:2			
Eng	F.TISSERAND	2002/04/29			0.XX	±					
Chr	S.S.CHERIAN	2008/06/28			0.XXX	±					
Appr	S.S.CHERIAN	2008/06/28	Product family		SMARTCARD		Spec ref		-		
			title SMARTCARD ASSEMBLY L08-16 CONTACTS - 8 CONTACTS			dwg no VJW12132			Rev. D		