

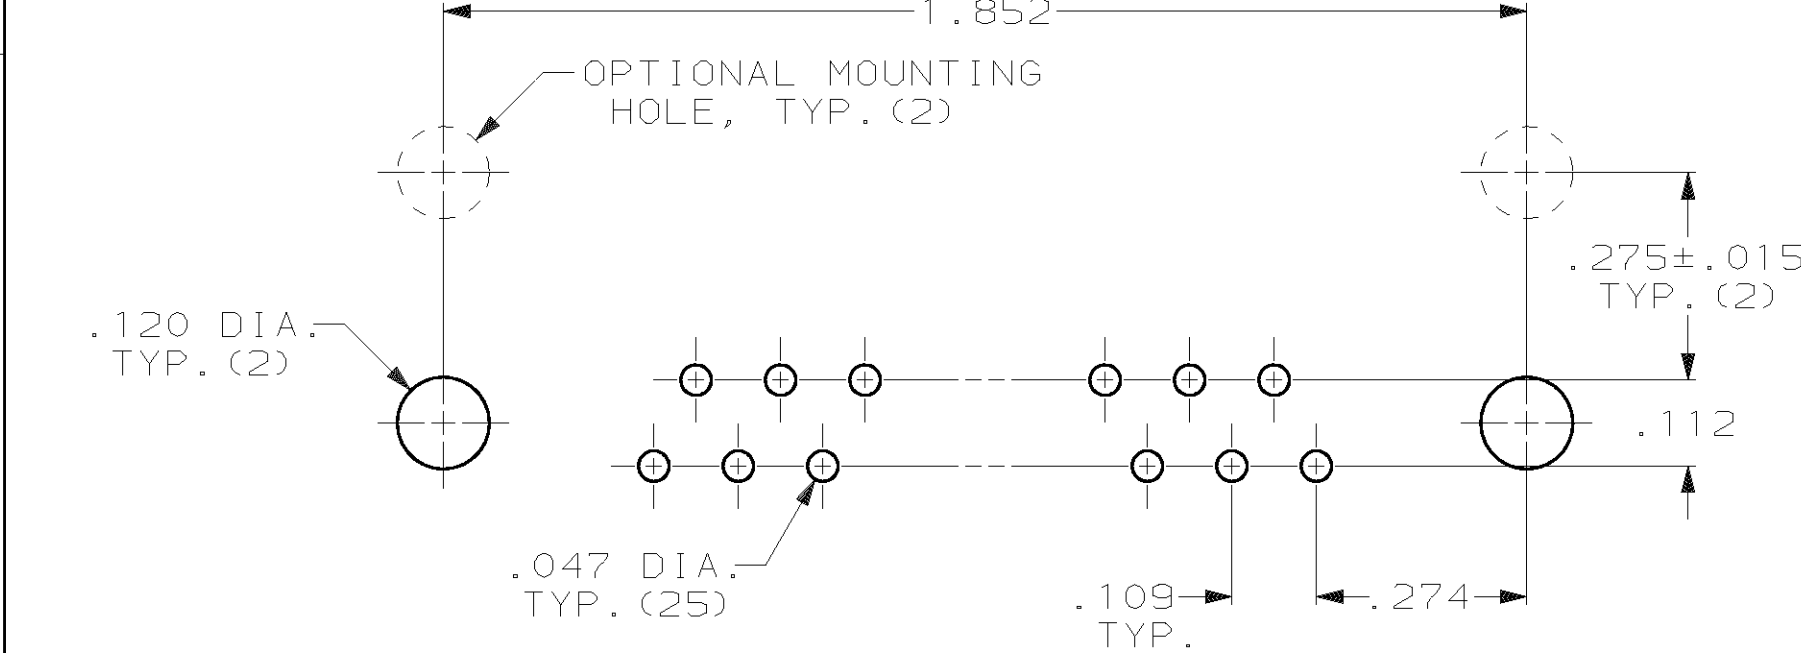
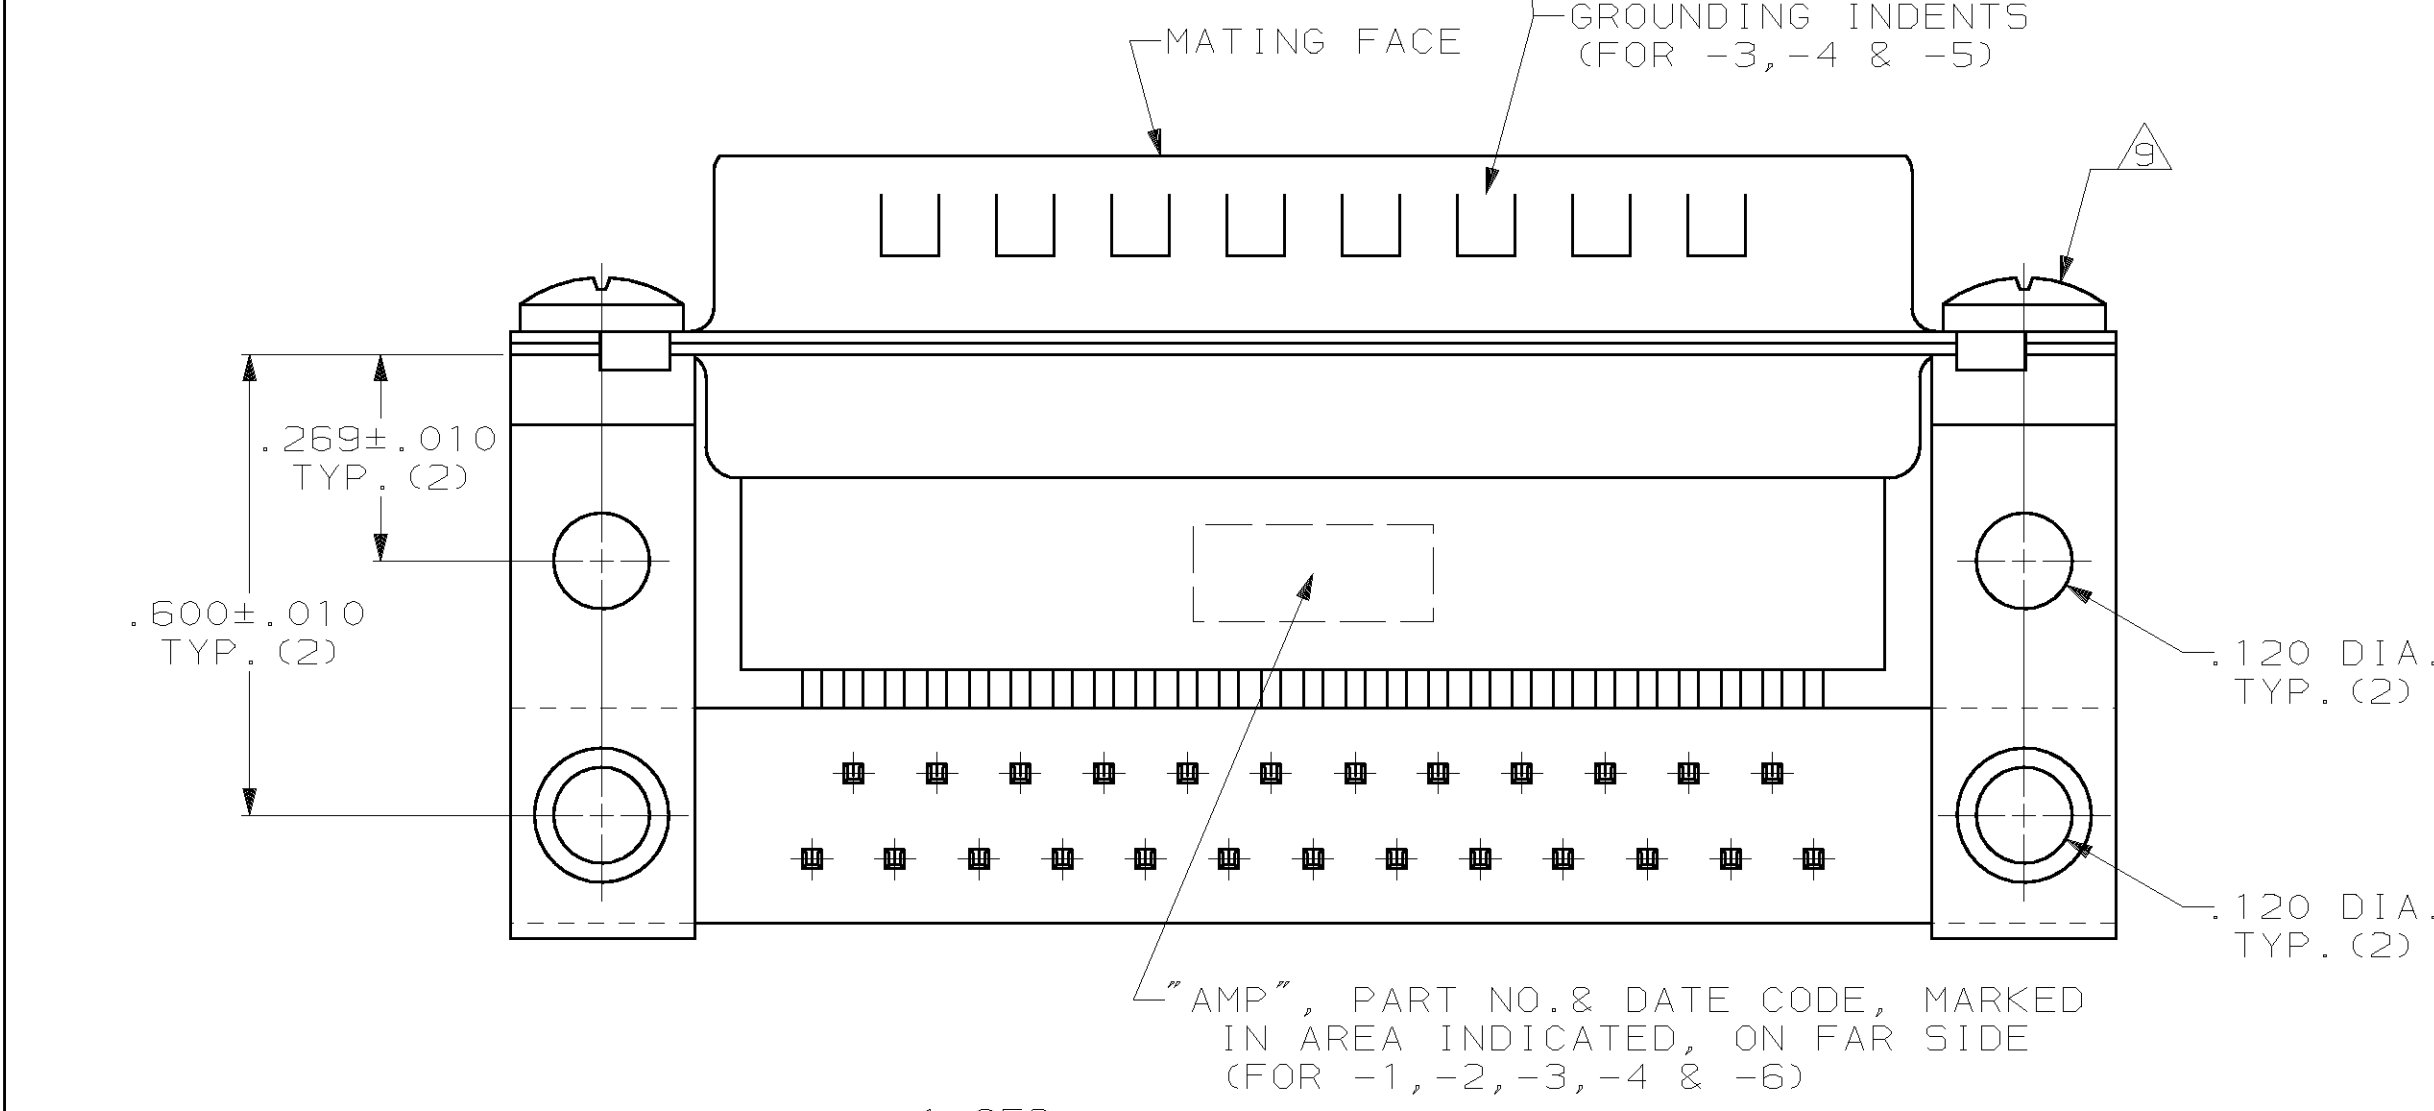


LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
GP	00				J	REV PER EC OUE0-0002-01	10 JAN 02	JR

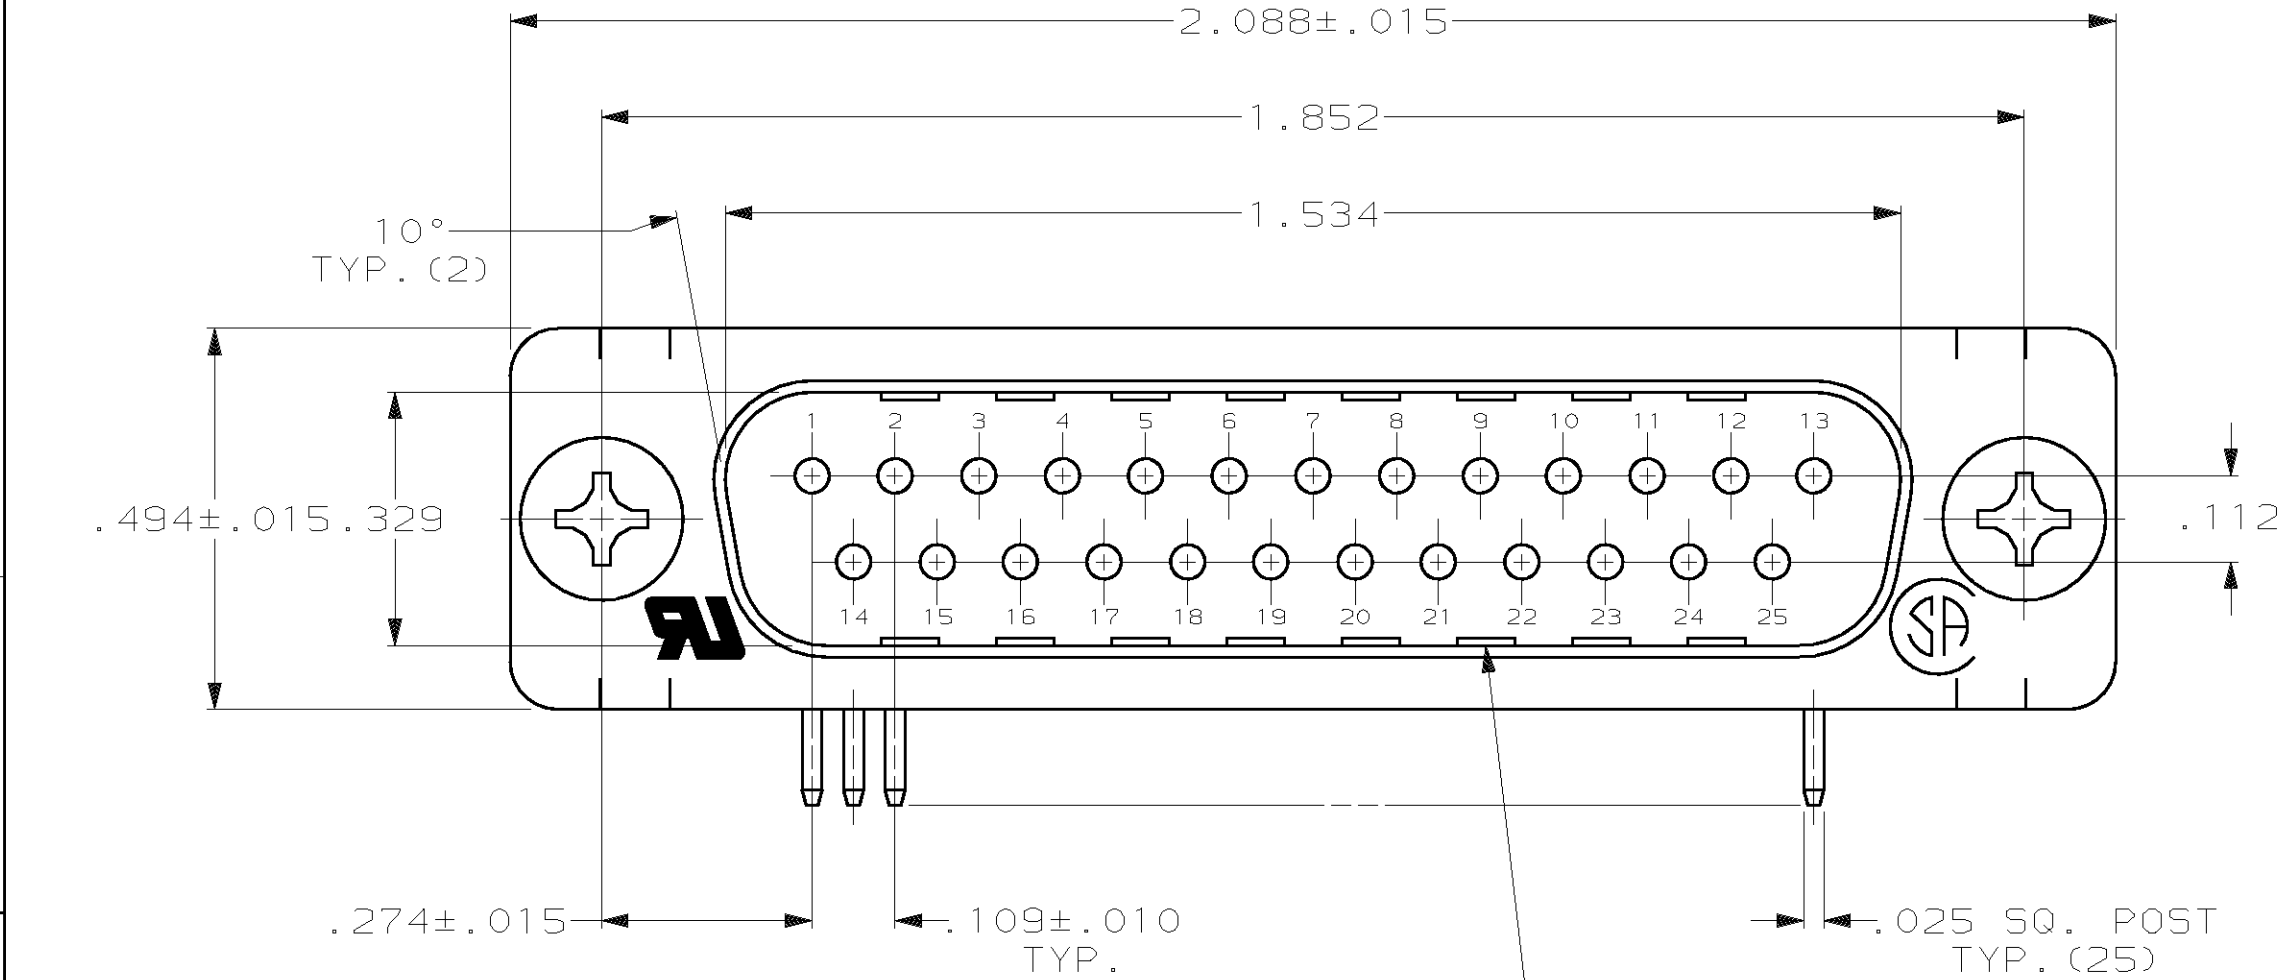

- CONNECTOR MATES WITH ANY 25 POS. RECEPTACLE IN AMPLIMITE SERIES & COMPLIES WITH AMP SPEC. 108-40,005 WHERE APPLICABLE.
- FLAME RETARDANT 94V-0 RATED THERMOPLASTIC; COLOR: BLACK.
- STEEL PER ASTM A109.
- BRASS PER MIL-C-50.
- TIN PLATING PER MIL-T-10727, GOLD PLATING PER MIL-G-45204, NICKEL PLATING PER QQ-N-290.
- TIN PLATED.
- GOLD PLATED FOR LENGTH OF .150 MIN FROM MATING END, GOLD FLASH IN MATED AREA, .000100 MIN TIN-LEAD ON OPPOSITE END, BOTH OVER .000050 MIN NICKEL.
- GOLD PLATED FOR LENGTH OF .150 MIN FROM MATING END, .000030 MIN GOLD IN MATED AREA, .000100 MIN TIN-LEAD ON OPPOSITE END, BOTH OVER .000050 MIN NICKEL.
- SCREWS ARE FOR -1, -2, -3 & -4.

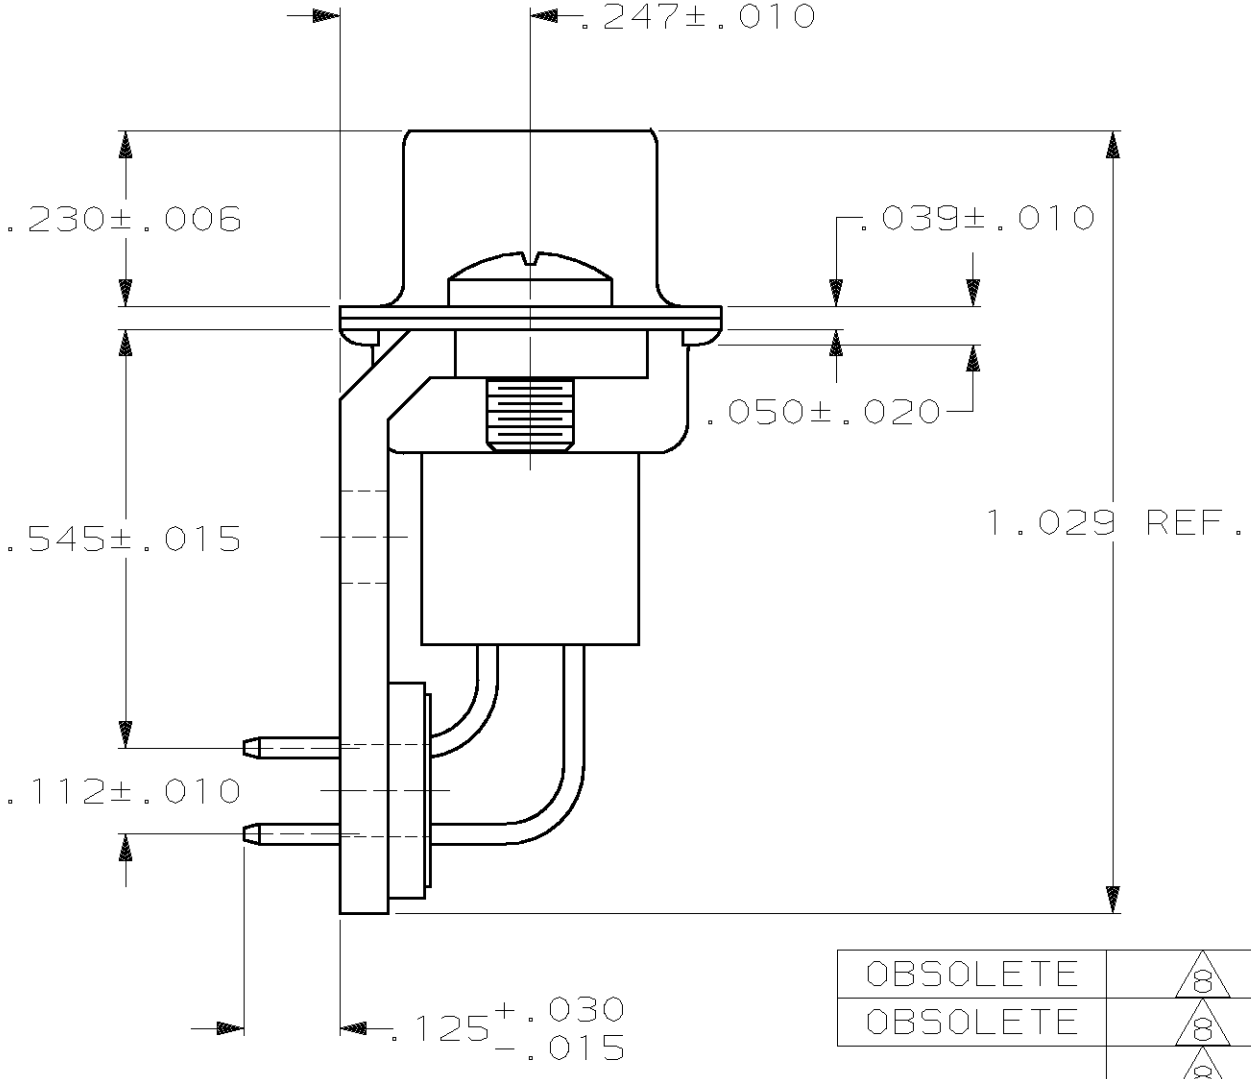

OBSOLETE	8	745353-6
OBSOLETE	8	745353-5
OBSOLETE	8	745353-4
OBSOLETE	7	745353-3
OBSOLETE	8	745353-2
	7	745353-1

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON :
2 PLC DEC ± .005
3 PLC DEC ± .005
ANGLES ± 2°

DR 12-13-83 J.GERACE
CHK 12-13-83 J.GERACE
APPD 03-15-84 P.SWEIGARD
APPD 03-15-84 J.ASSINI
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

AMP AMP Incorporated
Harrisburg, PA 17105-3608

NAME
PLUG ASSEMBLY, SIZE 3, 25 POSN, RIGHT ANGLE, .545 SERIES, .025 SQ. POSTS, AMPLIMITE™ HDP

SIZE CAGE CODE DRAWING NO
C 00779 C-745353

SCALE SHEET
1 OF 1

CONTACT FINISH PART NO

FINISH SHELLS & BRACKETS: 6 CONTACTS: SEE TABLE