
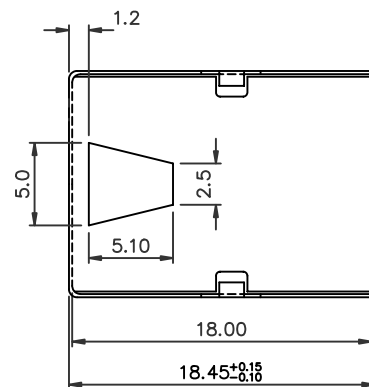
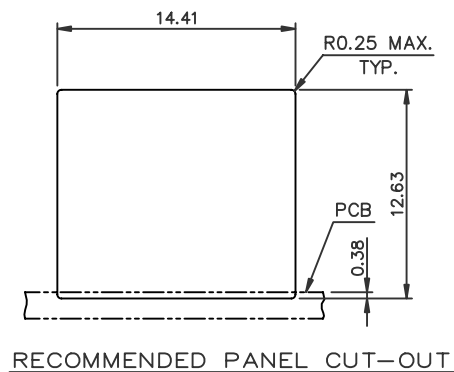



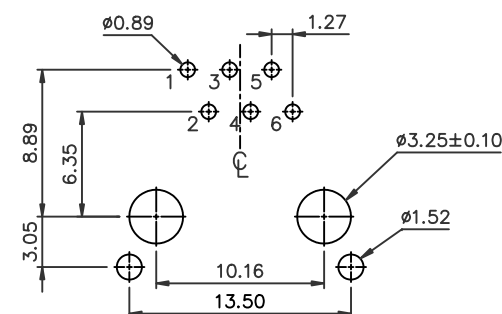
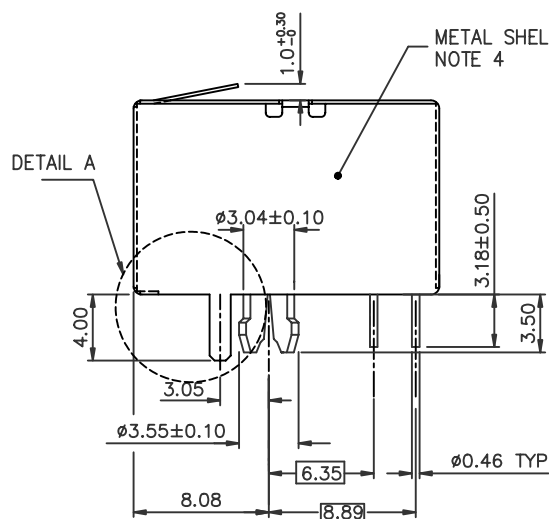
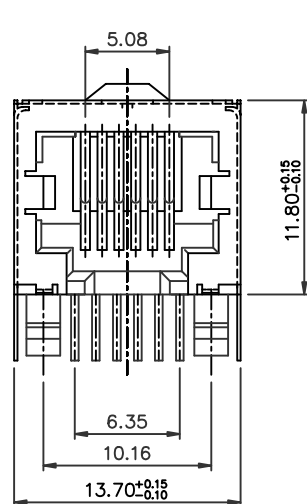
Tous droits strictement réservés. Reproduction ou communication a des tiers int  
sous quelque forme que ce soit sans autorisation écrite du propriétaire.  
Droits de reproduction BERG ELECTRONICS.  
Copyright BERG ELECTRONICS by

All rights strictly reserved. Reproduction or issue to third parties in any for  
whatever is not permitted without written authority from the proprietor.  
Property of c BERG ELECTRONICS.  
Copyright BERG ELECTRONICS by






#### NOTES:

1. RECOMMENDED P.C.B. THICKNESS 1.60 MM
2. HOUSING MAT'L: NYLON 66, 25% GLASS REINFORCED, COLOR: SEE TABLE
3. CONTACTS: PHOS BRONZE ALLOY UNS-C51000, Ø 0.460 ROUND WIRE, PLATING SEE TABLE.
- ④ METAL SHELL MATERIAL:  
COPPER ALLOY, 0.20MM THICK.  
FINISH: FOR 74543-XXXX TIN-LEAD 100u" THICK  
FOR 74543-XXXXLF PURE TIN 80u" THICK  
FOR 74543-XXXXNLF 1.27µm/50µ" MINIMUM NICKEL PLATING ,WITH TIN DIPPED BY MANUAL ON THE SOLDER TAIL .  
SEE THE DETAIL A
5. PACKAGING PER GES-14-361, USING TUBE
6. IF LF P/N THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
7. IF LF P/N THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.60mm MINIMUM THICK CIRCUIT BOARD
8. IF LF P/N PACKAGING MEETS GS-14-920 SPECIFICATION



POS. NO. CONFIGURATION

PRODUCT NO	NUMBER OF POS.	LOADED POSITION	HSG COLOR	PLATING
74543-3661	6	ALL POS.	BLACK	30 v" AU
74543-5661		ALL POS.		50 v" AU
74543-0641		2,3,4,5		30 v" G.X.T.
74543-0661		ALL POS.		30 v" G.X.T.
74543-0661LF		ALL POS.		30 v" G.X.T.
74543-3661LF		ALL POS.		30 v" AU
74543-5661LF		ALL POS.		50 v" AU
74543-0641LF		2,3,4,5		30 v" G.X.T.
74543-3661NLF		ALL POS.		30 " AU
74543-5661NLF		ALL POS.		50 " AU
74543-0641NLF		2,3,4,5		30 v" G.X.T.

mat'l code				tolerance unless otherwise specified				CUSTOMER COPY		 www.fciconnect.com					
rev.	ecn no.	dr	date	linear	.0 ± 0.25 .00 ± 0.13 .000± 0.05			projection 	title LOW PROFILE PCB III 6 POS MOD JACK, FULLY SHIELDED						
A	T80057	CATHY L	02/11/98												
B	T80510	M W	11/18/98												
C	T03-0443	W L	10/06/03	angles	± 2°				product family		MOD JACK	code			
D	N04-0125	YS	12/15/04	dr	CATHY LIN	01/16/98	unit		mm/inch				TWN		
E	N0-0305	WG	12/12/06	enrg	TONY CHIEN	01/16/98	mm/inch								
F	N07-0215	WG	09/07/07	chr	TONY CHIEN	01/16/98	scale	3 : 1		size	A3	dwg no.	74543	sheet <td>TWN</td>	TWN
G	N08-0052	SH	03/25/08	appd	JENN TSAO	01/16/98							1 OF 1		
sheet	revision	F													
index	sheet	1													