




PRODUCT NO.	PORT NUMBERS	DIM. A ^{+0.35} ₋₀	DIM. B±0.15	PACKAGING	REMARKS	PLATING
74633-004-R 74633-004-RLF 74633-004-RHLF	4x2	58.92	53.34	USING TRAY	AVAILABLE	30 v" G.X.T.
74633-304-R 74633-304-RLF 74633-304-RHLF						30 v" GOLD. ⑧
74633-504-R 74633-504-RLF 74633-504-RHLF						50 v" GOLD.


LEAD FREE PRODUCT NO.
MEETS PIP PROCESS PRODUCT NO.

NOTES:

1. RECOMMENDED P.C.B THICKNESS 1.60 MM
2. HOUSING MAT'L: NYLON 6/6, 25% G.F.,UL 94V-0,
COLOR - BLACK.
3. CONTACTS: PHOS BRONZE ALLOY UNS-C51000,
Ø 0.460 ROUND WIRE, PLATING SEE TABLE.
- ④ SHIELDING MATERIAL: 0.25MM THICK, BRASS ALLOY.
SHIELDING PLATING: 30 v" NICKEL PRE-PLATED AND
WITH POST SOLDER DIP ON GROUNDING LEGS AS
DETAIL C (IF LF P/N WITH POST PURE TIN SOLDER DIP) .
- 5 IF LF P/N THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES
AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- 6 THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE
FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.60mm
MINIMUM THICK CIRCUIT BOARD.
- 7 IF LF P/N PACKAGING MEETS GS-14-920 SPECIFICATION.
- ⑧ EQUIVALENT THICKNESS Au AND GXT PLATING HAVE SAME
FUNCTION AND THEY ARE ALTERNATIVE BY THE CUSTOEMR .

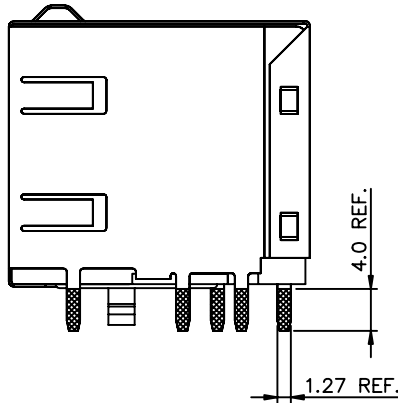

DETAIL C
NOTE 4

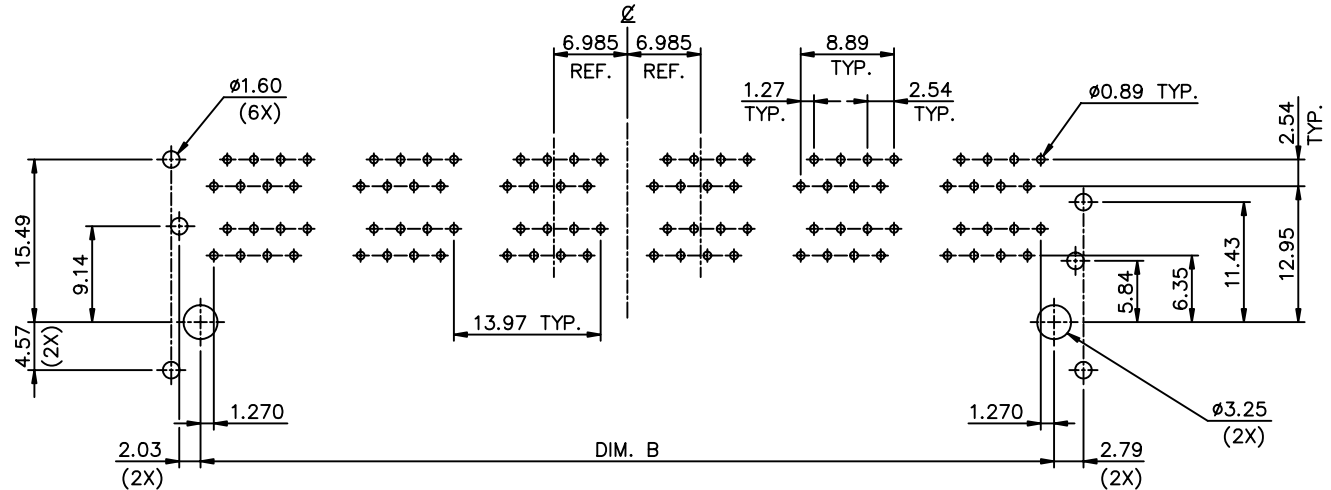

RECOMMENDED P.C.B LAYOUT COMPONENT SIDE

mat'l code				tolerance unless otherwise specified		CUSTOMER COPY		FCI www.fciconnect.com		
rev.	ecn no.	dr	date	linear	.0 ± 0.25	projection	title	RJ45 DOUBLE DECK GANG JACK ASSY		
J					.00 ± 0.13					
					.000± 0.05					
				angles	± 2'	2:1	A3	product family MOD JACK size dwg no. 74633 code TWN sheet 2 OF		
				dr	CATHY LIN 05/26/98					
				enr	TONY CHIEN 05/26/98					
				chr	TONY CHIEN 05/26/98					
				appd	JENN TSAO 05/26/98					
sheet	revision									
index	sheet									