



20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 74736 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1

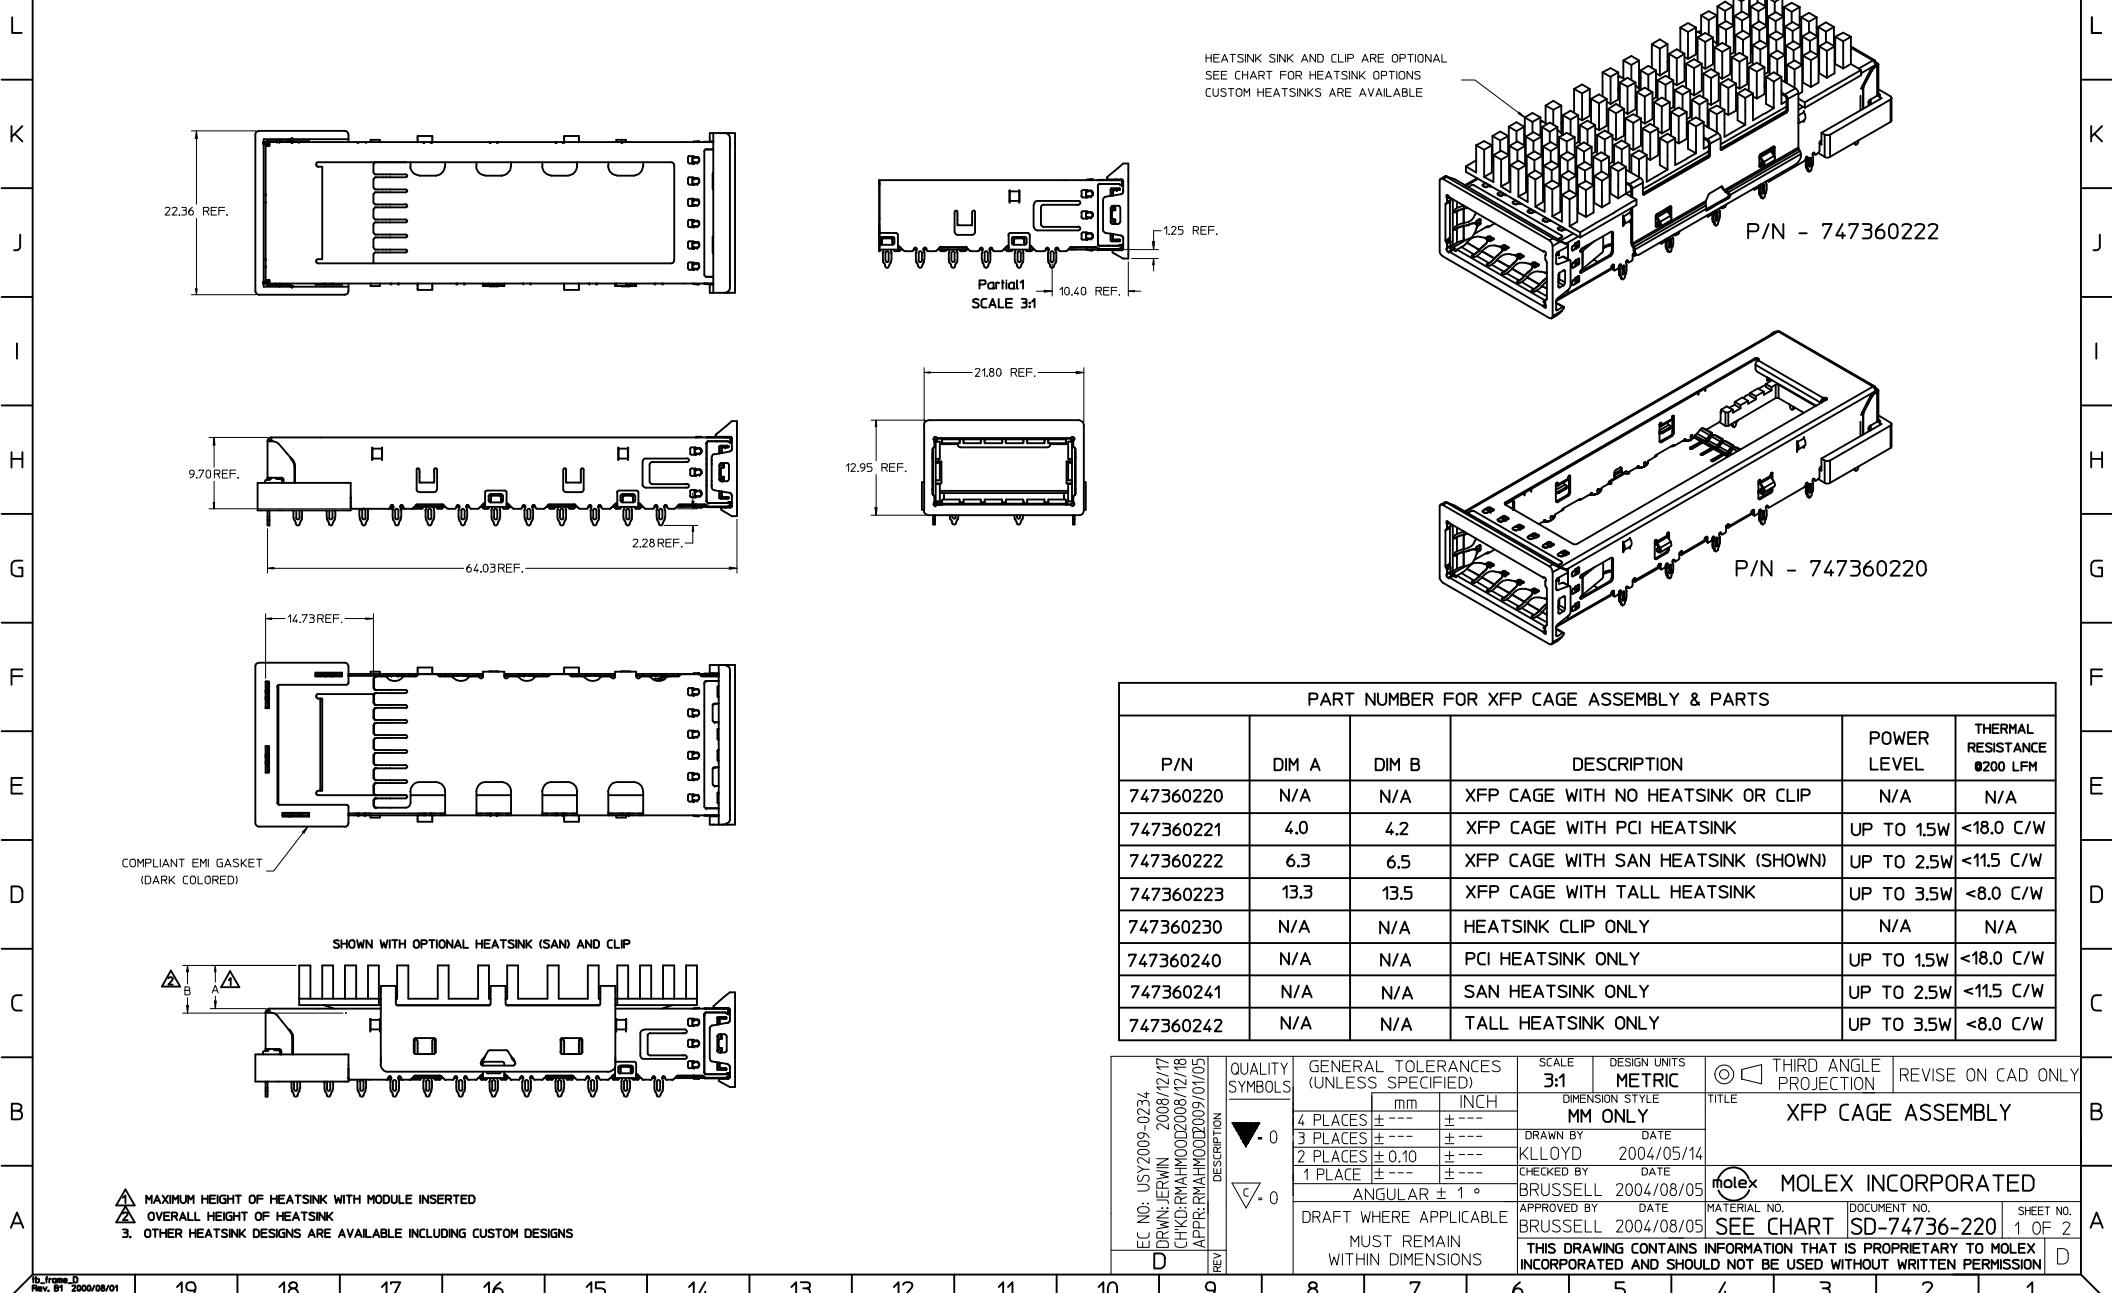

1b frame\_D  
Rev. B1 2000/08/01 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1


A B C D E F G H I J K L

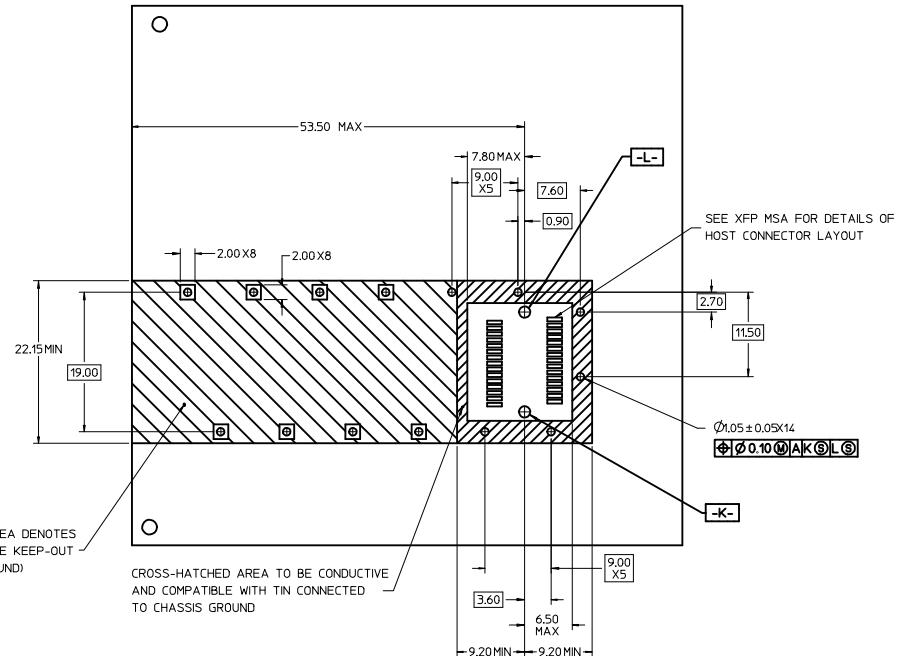

OSSED-HATCHED AREA DENOTES  
MPONENT AND TRACE KEEP-OUT -  
(EXCEPT CHASSIS GROUND)

CROSS-HATCHED AREA TO BE CONDUCTIVE  
AND COMPATIBLE WITH TIN CONNECTED —  
TO CHASSIS GROUND

**⚠ FOR PCI APPLICATIONS RECOMMENDED DIMENSION IS  $0.4 \pm 0.1$**   
**⚠ FLAT ROCK TOOLING CAN BE USED TO PRESS CAGE IN WITH OR WITHOUT HEATSINK**  
**BOTTOM OF PCB SHOULD BE PROPERLY SUPPORTED**  
**INSERTION FORCE MAX: 100 LB (WITH ANY PCB PLATING)**

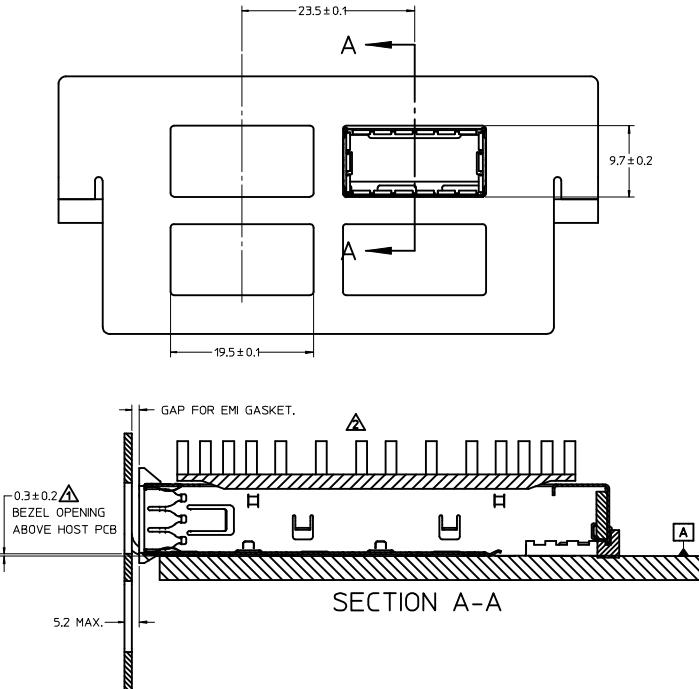

## SECTION A-A