
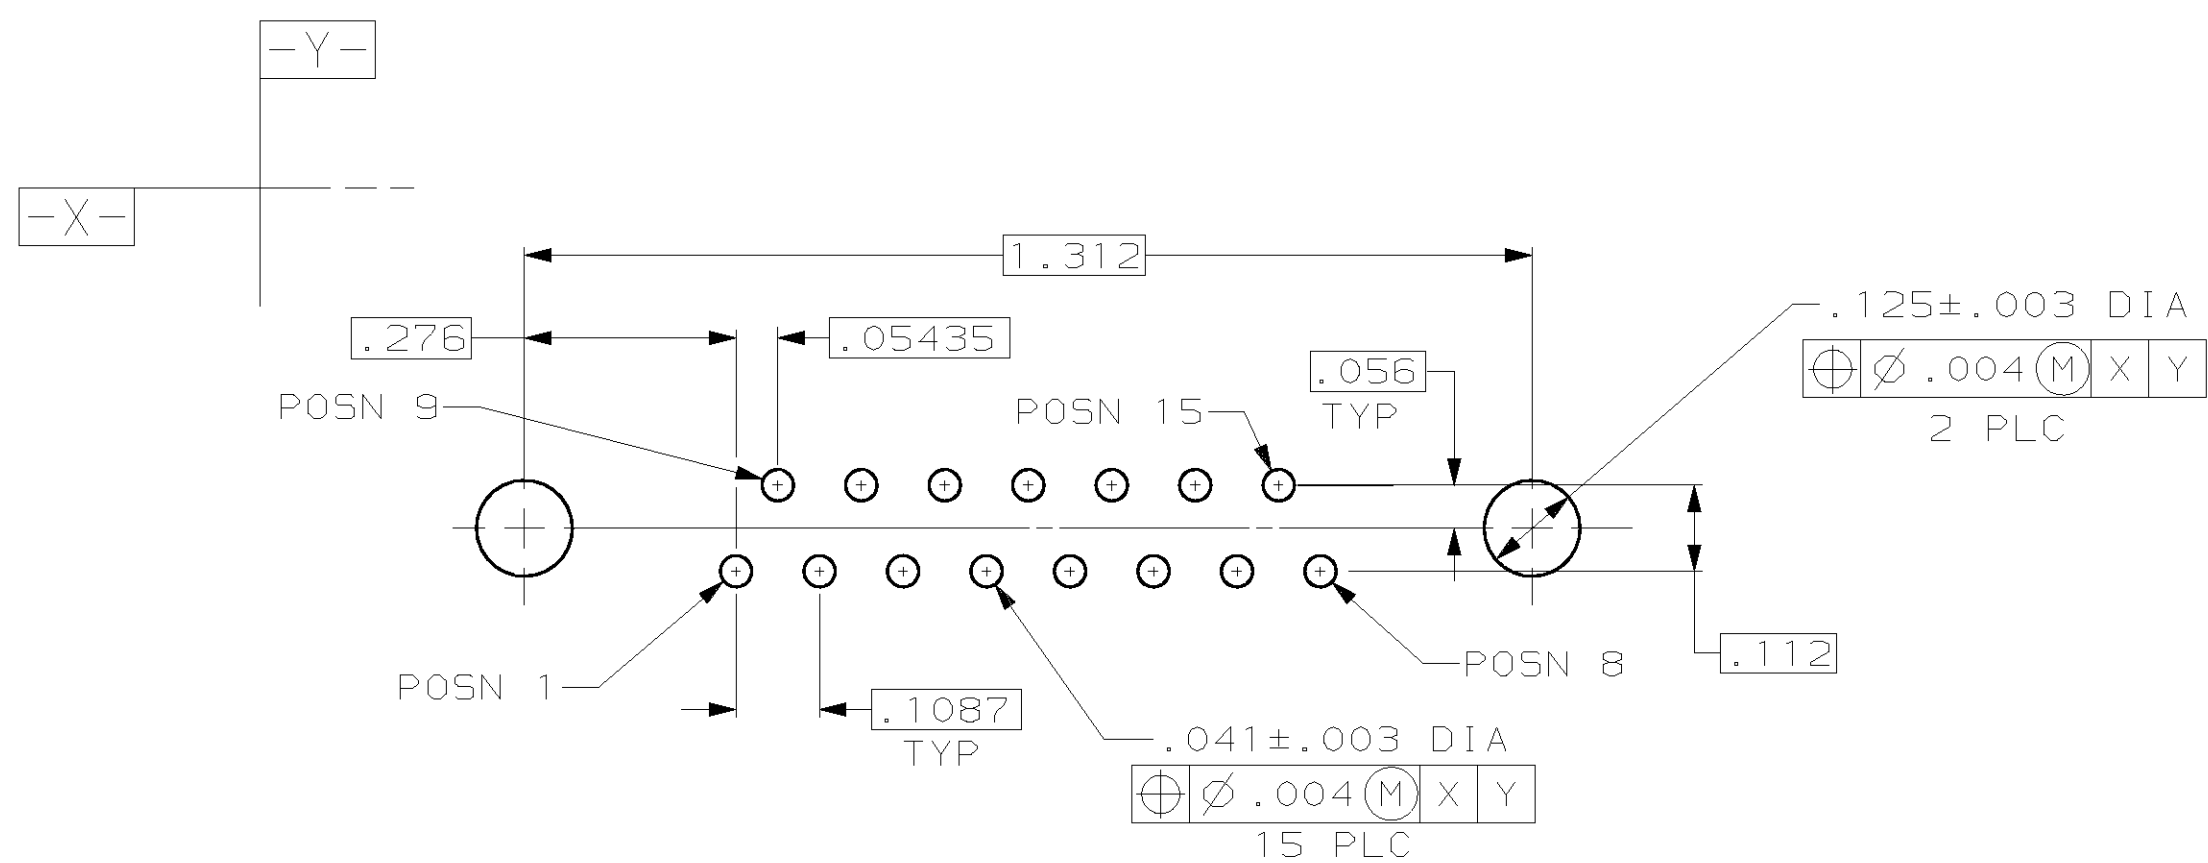
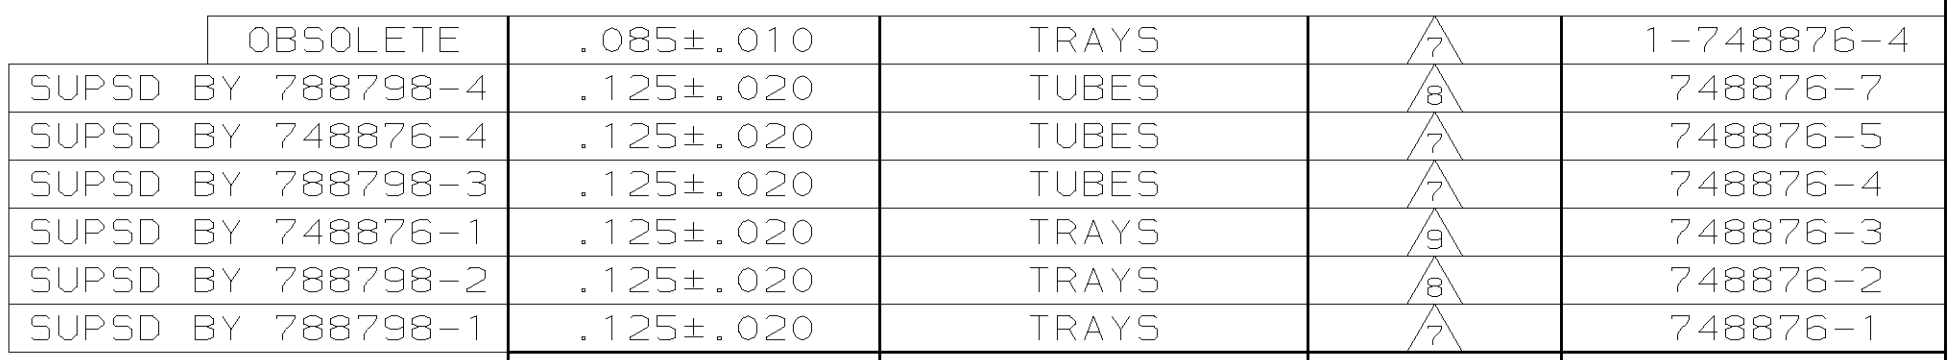
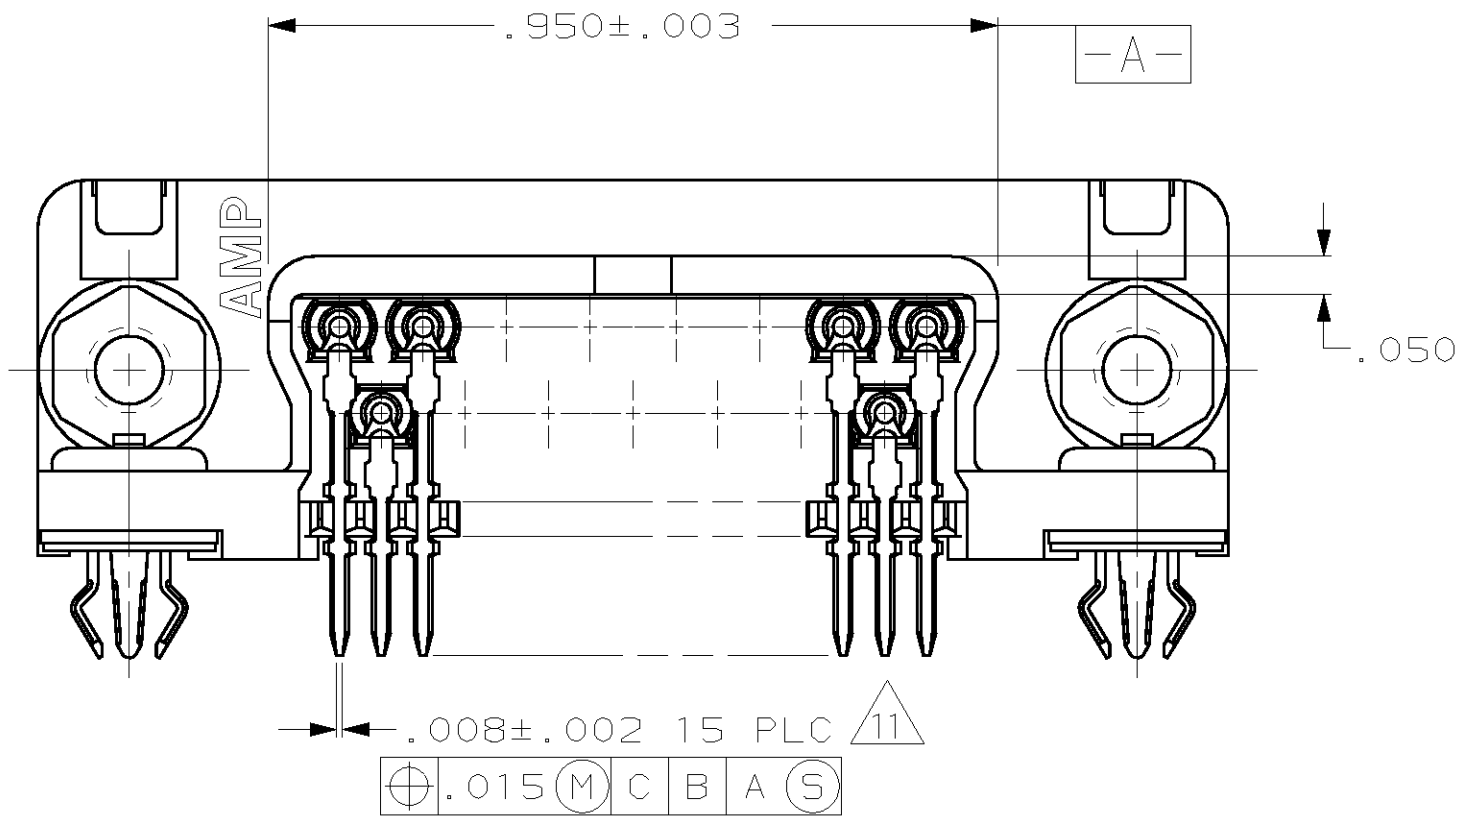


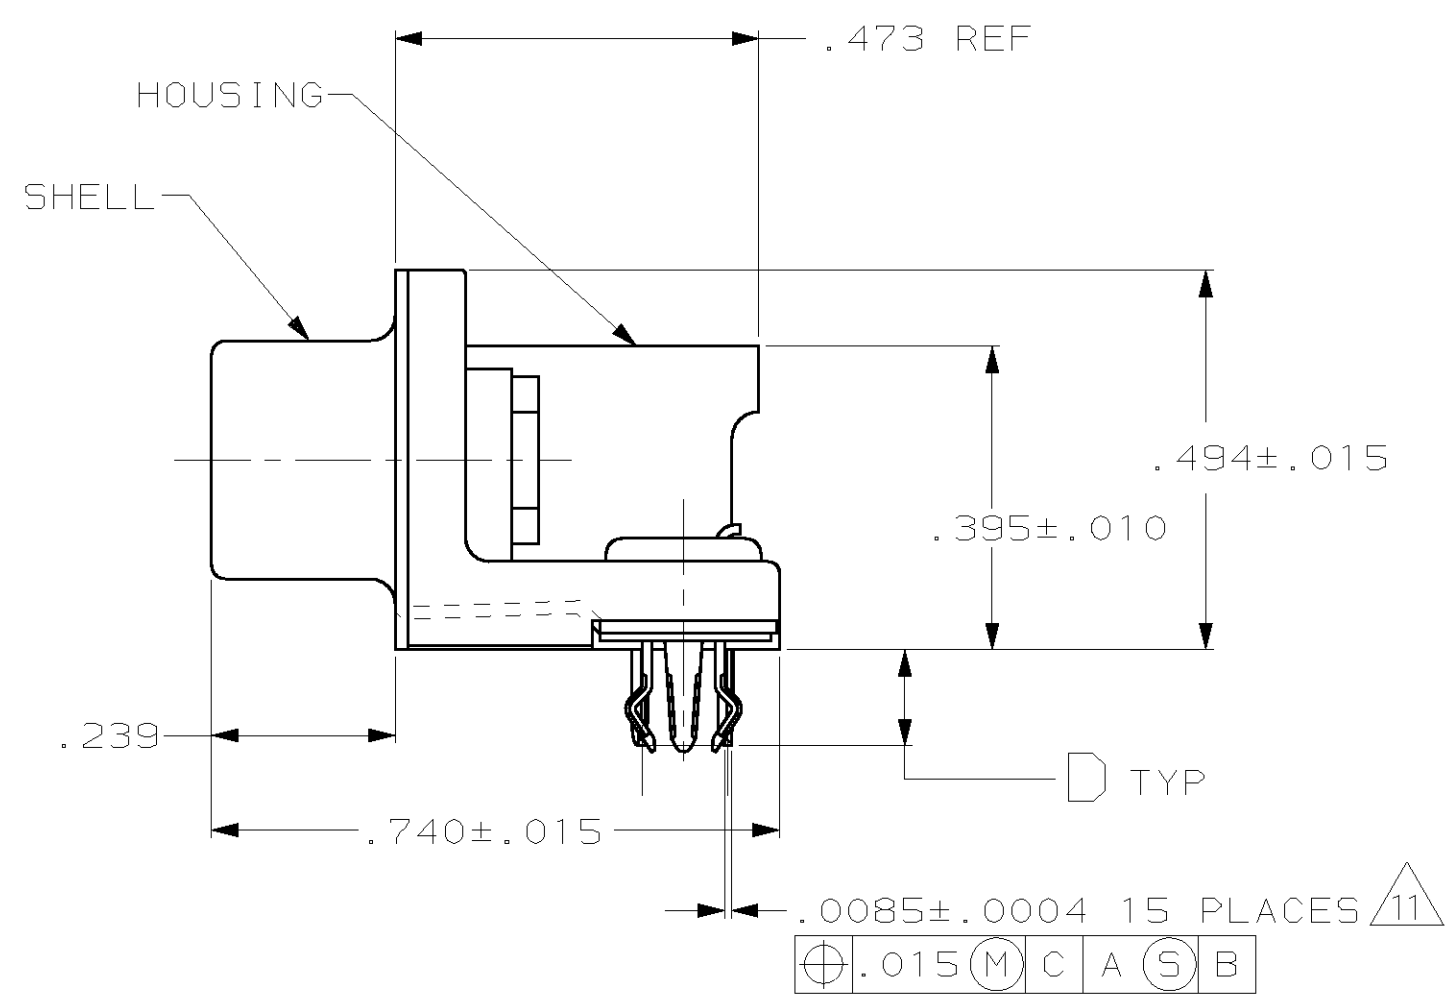

- ① NYLON, UL 94V-0 RATED, 30% GLASS FILLED, BLACK.
- ② STEEL PER ASTM A109.
- ③ PHOSPHOR BRONZE PER QQ-B-750.
- ④ EYELETS: BRASS; INSERTS: ZINC; BOARDLOCKS: COPPER ALLOY.
- ⑤ PLATED .000100 MIN THICK BRIGHT TIN OVER .000050 MIN THICK COPPER.
- ⑥ GOLD PLATING PER MIL-G-45204, NICKEL PLATING PER QQ-N-290, TIN PLATING PER MIL-T-10727.
- ⑦ PLATED WITH .000030 GOLD ON MATING END, .000120 MIN TIN-LEAD ON SOLDER TAIL; ALL OVER .000050 MIN NICKEL UNDERPLATE.
- ⑧ PLATED WITH GOLD FLASH ON MATING END, .000120 MIN TIN-LEAD ON SOLDER TAIL; ALL OVER .000050 MIN NICKEL UNDERPLATE.
- ⑨ PLATED WITH .000010 GOLD ON MATING END, .000120 MIN TIN-LEAD ON SOLDER TAIL; ALL OVER .000050 MIN NICKEL UNDERPLATE.
- ⑩ EYELETS: BRIGHT TIN PLATED; INSERTS: CLEAR CHROMATE; BOARDLOCKS: TIN-LEAD PLATED.
- ⑪ POSITION TOLERANCE APPLIES AT TIP ONLY.
- ⑫ BOARDLOCKS WILL EXTEND .085 MAX BELOW .062 THICK P.C. BOARD.

28-DEC-99 15:04:17 anp36051 /home/anp36051/ednno