




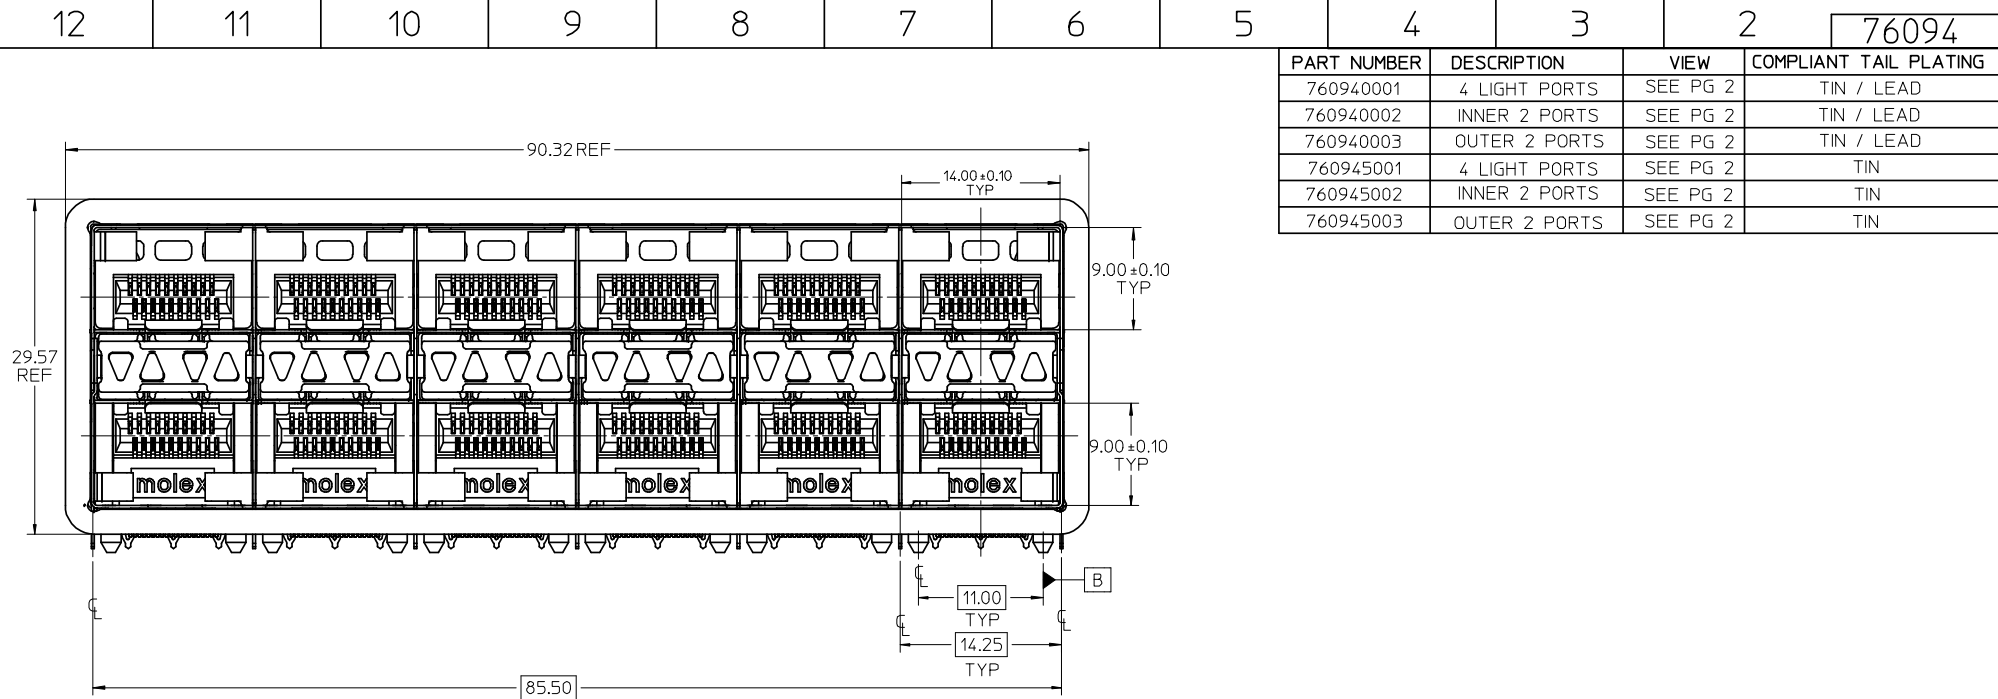


- NOTES:
- MATERIAL:
 - CAGE: NICKEL SILVER, THICKNESS: 0.25mm
 - GASKET FLANGE: STAINLESS STEEL
 - EMI GASKET: CONDUCTIVE POLYMER
 - CONNECTOR HOUSING: GLASS FILLED THERMOPLASTIC, UL: 94 V-0, COLOR: BLACK
 - OVERMOLD TERMINAL HOUSING: GLASS FILLED THERMOPLASTIC, UL: 94 V-0, COLOR: BLACK
 - TERMINALS: BRASS
 - LIGHT PIPE: POLYCARBONATE UL 94 V-0, COLOR CLEAR
 - LIGHT PIPE HOUSING: ZINC
 - FINISH
 - TERMINALS:
 - CONTACT AREA: 0.76 MICRONS MIN. HARD GOLD OVER 1.27 MICRONS MIN. NICKEL.
 - COMPLIANT TAIL - TIN/LEAD OPTION: 0.76 - 1.52 MICRONS 90/10 TIN/LEAD OVER 0.76 - 1.52 MICRONS NICKEL
 - COMPLIANT TAIL - TIN OPTION: 0.76 - 1.52 MICRONS TIN OVER 0.76 - 1.52 MICRONS NICKEL
 - LIGHT PIPE HOUSING: 150 MICRONS NICKEL OVER 150 MICRONS COPPER
 - REFER TO PS-75310-001 PRODUCT SPEC FOR ALL ELECTRICAL, MECHANICAL AND ENVIRONMENTAL SPECIFICATIONS.
 - LIGHT PIPE PAD LAYOUT IS FOR 0805 LOW-PROFILE LED PACKAGE FOR OTHER RECOMMENDED LAYOUTS REFER TO MOLEX'S REPORT TS-75310-001.
 - REFER TO PK-75451-001 FOR ALL PACKAGING SPECIFICATIONS.
 - ALL EXTERIOR SURFACES TO BE CLASS 'B' SURFACES EXCEPT THE UNDER SIDE OF THE CAGE WHERE THE PCB WOULD BE LOCATED AND AS NOTED. THE SURFACES TO CONFORM TO THE MOLEX COSMETIC DOC PS-45499-002.

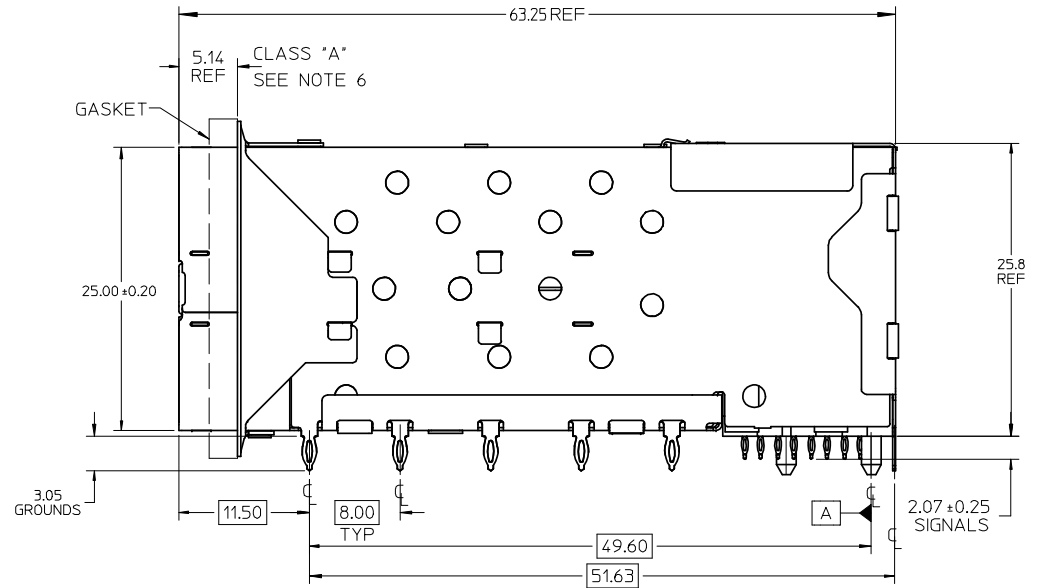


REVISED DIMENSIONS EC NO: UCP2008-1003 DRWN: JLONG 2008/01/11 CHKD: 2008/01/11 APPR: MBANAKIS 2008/01/11	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE 3:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		REVISE ON CAD ONLY		
			mm	INCH	DIMENSION STYLE		TITLE STACKED SFP+ 2X6 ASS'Y WITH ELASTOMERIC GASKET				
			4 PLACES	± ---	± ---	MM ONLY					
			3 PLACES	± ---	± ---	DRAWN BY DATE					
			2 PLACES	± 0.13	± ---	JLONG 01-18-2007		MOLEX MOLEX INCORPORATED			
1 PLACE	± 0.25	± ---	CHECKED BY DATE								
ANGULAR ± 5 °		MSANDBERG 01-18-2007									
DRAFT WHERE APPLICABLE			APPROVED BY DATE		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
MUST REMAIN WITHIN DIMENSIONS			RNELSON 01-18-2007		SEE CHART		SD-76094-001		1 OF 4		
			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

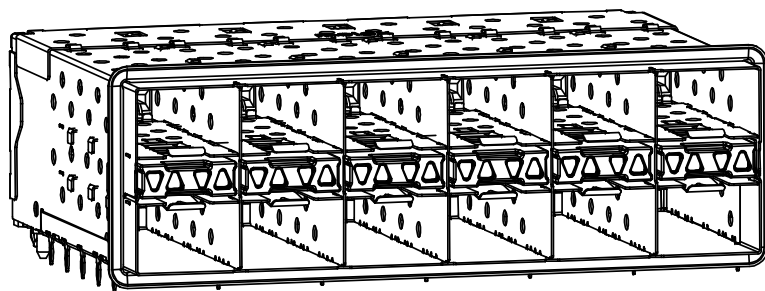


760940001 AND 760945001
WITH INNER AND OUTER LIGHT PIPES

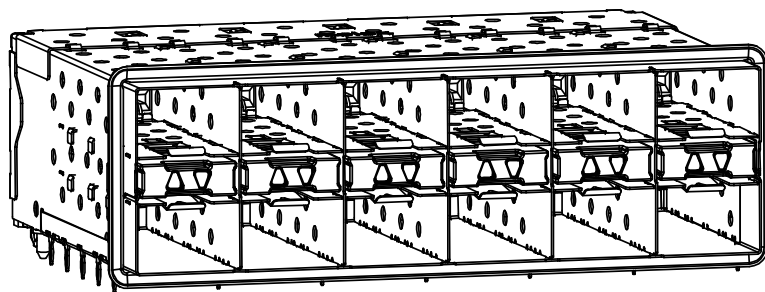


760940002 AND 760945002
WITH INNER LIGHT PIPES

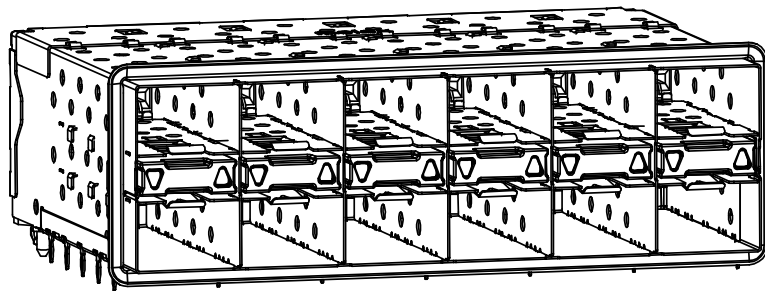



760940003 AND 760945003
WITH OUTER LIGHT PIPES

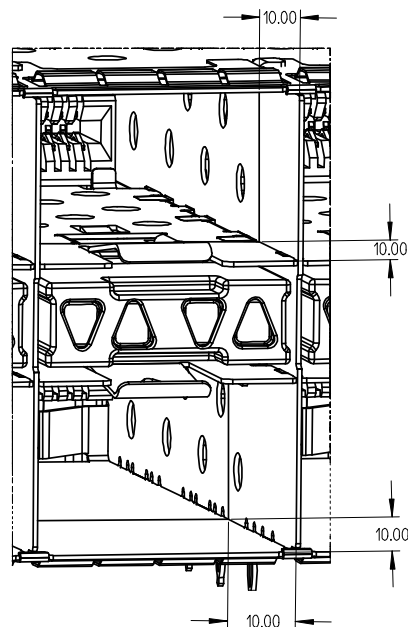



10.00MM AREA SETBACK IN CAGE IS TO BE FREE
OF ANY HOLES, DIMPLES, SEAMS OR ANY OTHER
FEATURE. (4 SIDES PER MODULAR PORT)

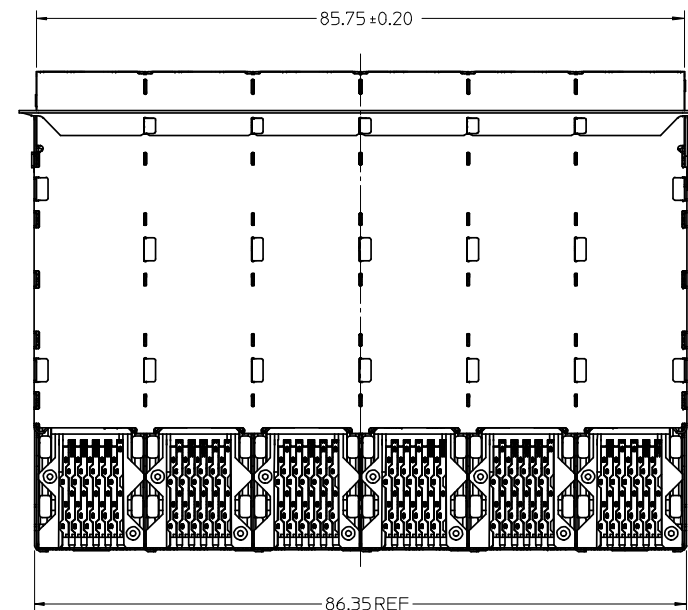

SEE SHEET 1 EC NO: UCP2008-1003 DRWN: JLONG 2008/01/11 CHKD: 2008/01/11 APPR: MBANAKIS 2008/01/11	QUALITY SYMBOLS	 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE 2:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	REVISE ON CAD ONLY				
				mm	INCH	DIMENSION STYLE MM ONLY		TITLE STACKED SFP+ 2X6 ASS'Y WITH ELASTOMERIC GASKET				
			4 PLACES	± ---	± ---	DRAWN BY JLONG					DATE 01-18-2007	
			3 PLACES	± ---	± ---	CHECKED BY MSANDBERG					DATE 01-18-2007	
			2 PLACES	± 0.13	± ---	APPROVED BY RNELSON					DATE 01-18-2007	
	DESCRIPTION	 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	1 PLACE	± 0.25	± ---	ANGULAR ± 5 °		MOLEX INCORPORATED			
				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						MATERIAL NO. SEE CHART	DOCUMENT NO. SD-76094-001	SHEET NO. 2 OF 4

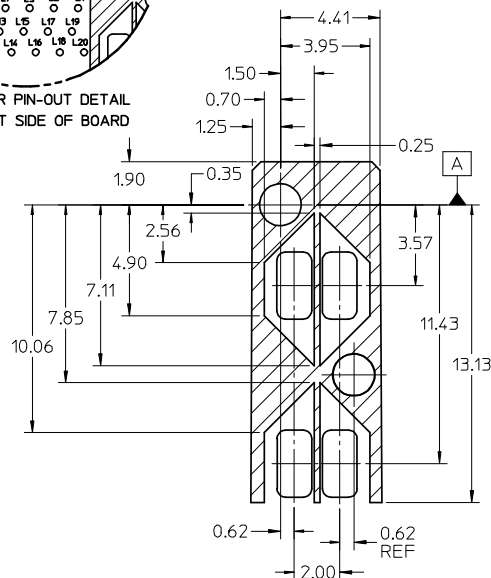
CONNECTOR PIN-OUT DETAIL
COMPONENT SIDE OF BOARD

KEEPOUT ZONE DETAIL

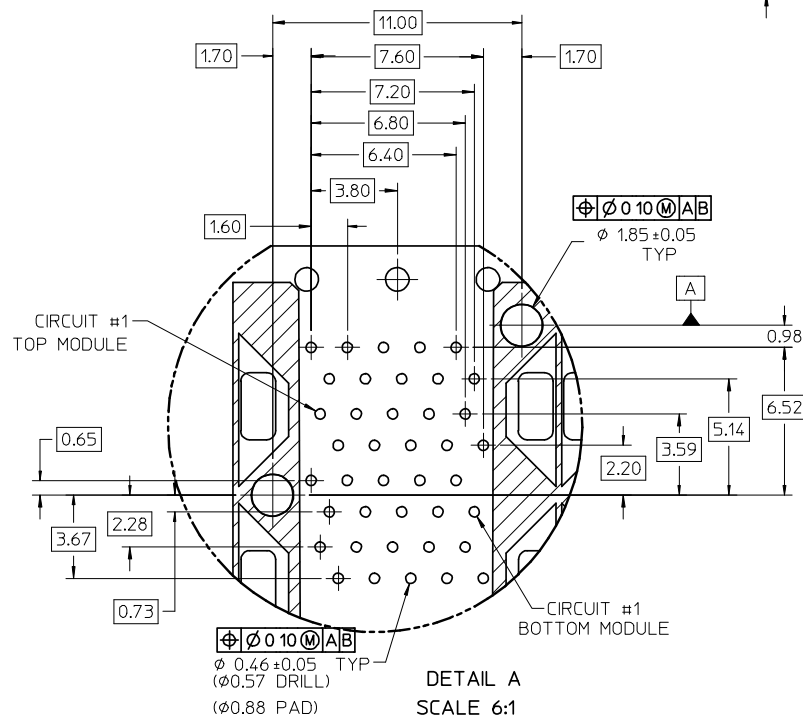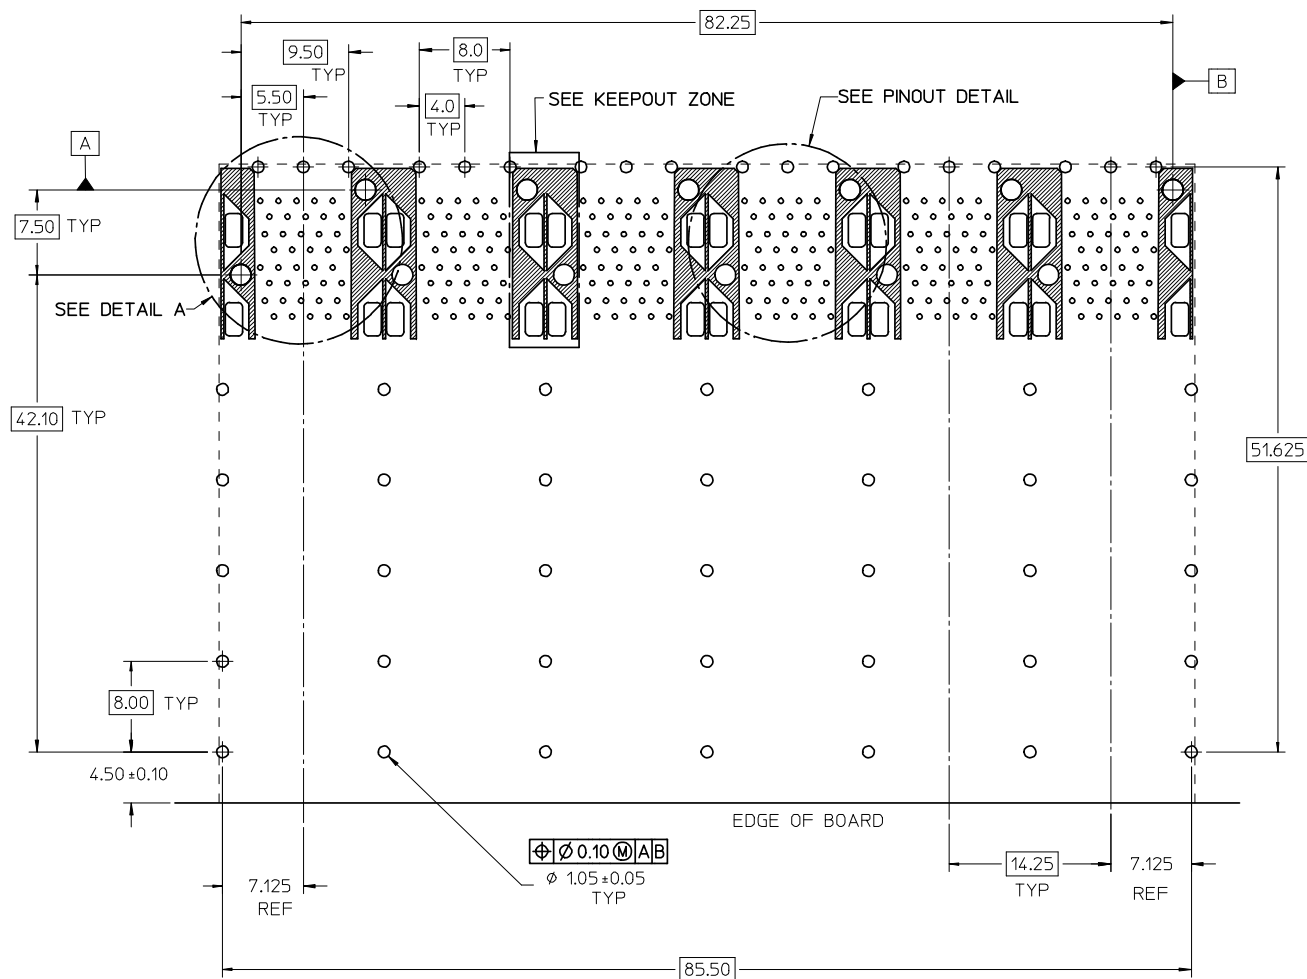
DETAIL A
SCALE 6:1

RECOMMENDED PCB LAYOUT - COMPONENT SIDE
MINIMUM PCB THICKNESS OF 1.57mm
THE ENTIRE AREA OF THE CONNECTOR FOOTPRINT
TO BE CONSIDERED THE KEEP OUT AREA INDICATED
BY THE DASHED LINE

SEE SHEET 1 EC NO: UCP2008-1003 DRWN: JLONG 2008/01/11 CHKD: 2008/01/11 APPR: MBANAKIS 2008/01/11	DESCRIPTION	QUALITY SYMBOLS ▽ - 0 ▽C - 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE 3:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY						
				mm	INCH	DIMENSION STYLE MM ONLY		TITLE STACKED SFP+ 2X6 ASS'Y WITH ELASTOMERIC GASKET						
			4 PLACES	± ---	± ---	DRAWN BY					DATE			
			3 PLACES	± ---	± ---	JLONG					01-18-2007			
			2 PLACES	± 0.13	± ---	CHECKED BY					DATE			
			1 PLACE	± 0.25	± ---	MSANDBERG		01-18-2007	molex MOLEX INCORPORATED					
			ANGULAR ± 5 °			APPROVED BY		DATE				MATERIAL NO.	DOCUMENT NO.	SHEET NO.
			DRAFT WHERE APPLICABLE			RNELSON		01-18-2007				SEE CHART	SD-76094-001	3 OF 4
			MUST REMAIN WITHIN DIMENSIONS			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						C		

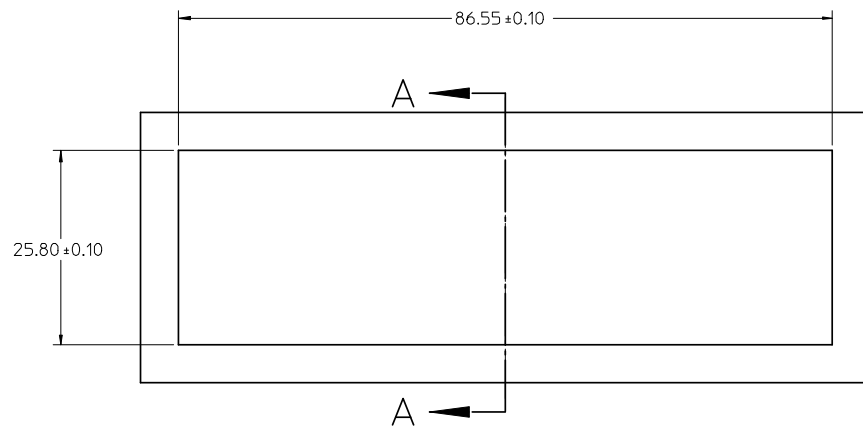

BEZEL CUTOUT CENTER SPACING DETAIL
BEZEL THICKNESS 0.8 - 2.6

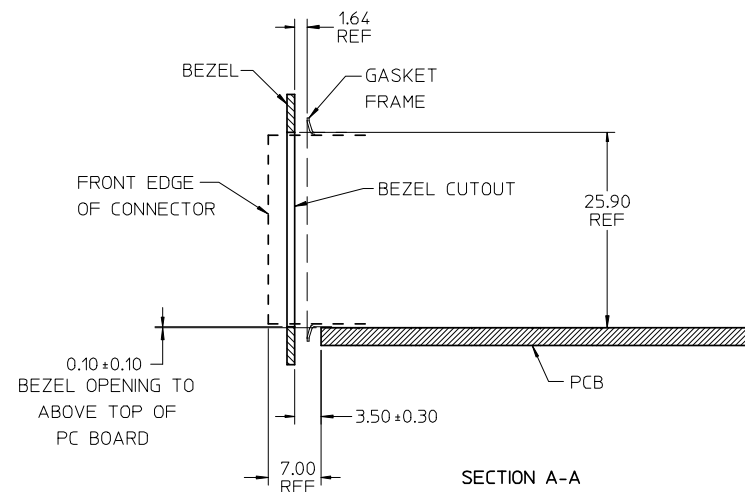

SECTION A-A

SEE SHEET 1 EC NO: UCP2008-1003 DRWN: JLONG 2008/01/11 CHKD: 2008/01/11 APPR: MBANAKIS 2008/01/11	DESCRIPTION REV	QUALITY SYMBOLS ▽ = 0 ▽C = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)			SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		REVISE ON CAD ONLY				
						DIMENSION STYLE MM ONLY		TITLE STACKED SFP+ 2X6 ASS'Y WITH ELASTOMERIC GASKET						
						DRAWN BY JLONG							DATE 01-18-2007	
			4 PLACES ± --- ± ---			CHECKED BY MSANDBERG		DATE 01-18-2007		MOLEX MOLEX INCORPORATED				
			3 PLACES ± --- ± ---			APPROVED BY RNELSON		DATE 01-18-2007						
			2 PLACES ± 0.13 ± ---			MATERIAL NO. SEE CHART		DOCUMENT NO. SD-76094-001		SHEET NO. 4 OF 4				
			1 PLACE ± 0.25 ± ---			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								
			ANGULAR ± 5 °											
			DRAFT WHERE APPLICABLE											
			MUST REMAIN WITHIN DIMENSIONS											