


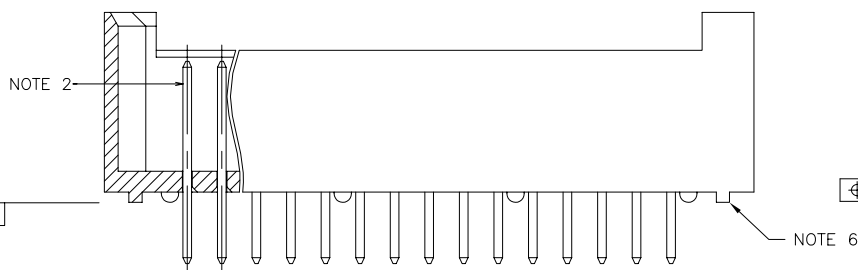
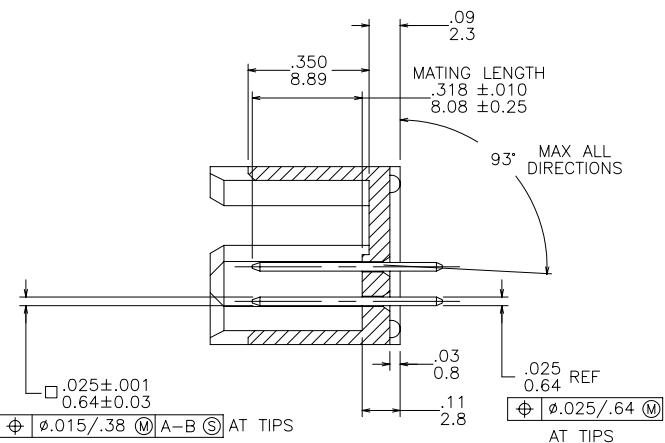


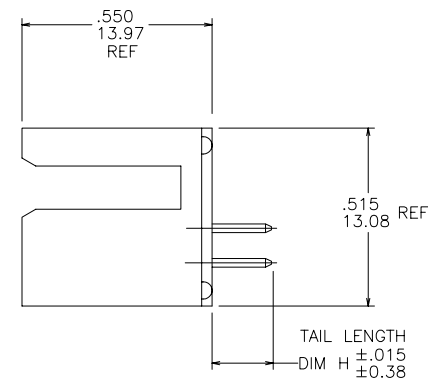

FCIconnect.com

Copyright FCI

PRODUCT NUMBER
SEE TABLE

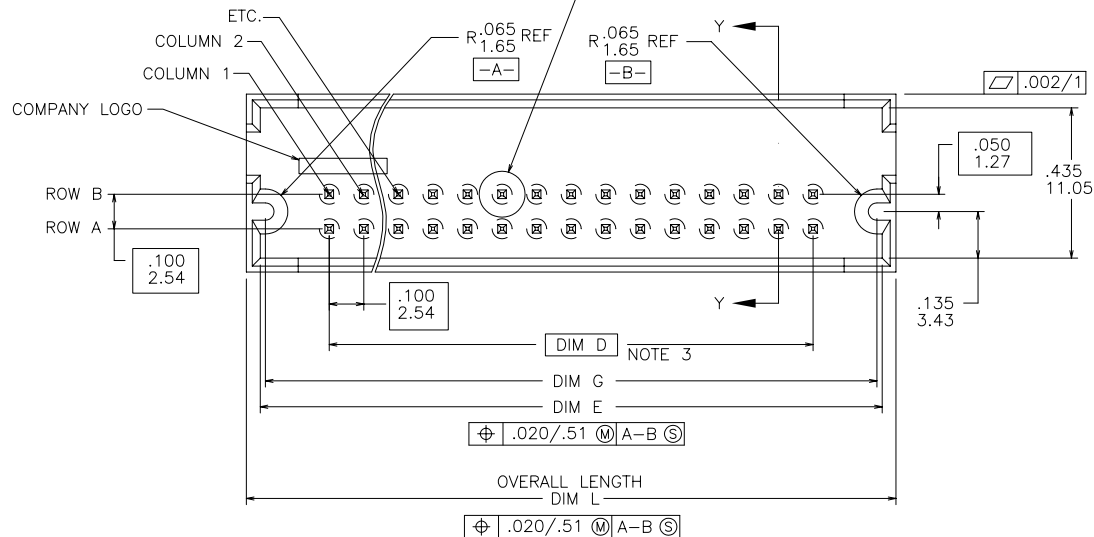

mat'l. code NOTES 1 & 5				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection INCH/MM	product family HEADERS
ltr	ecn	no	dr	date	tolerances unless otherwise specified		title
U	V50831	HTB		6/12/95	angles	.XX±.01/.3	VERTICAL 2-ROW GUIDE PIN
V	V50688	LSS		7/5/95	linear	.XXX±.005/.13	(SLOTTED) HEADER-SOLDER TAILS
W	V71449	HTB		10/7/97	0°±2°	.XXXX±.0020/.051	scale 2:1
X	V81283	EPK	10/14/98	dr	S. ROYER	3/28/90	FCI
Y	V03-0342	GJP	3/21/03	enr	A. MCNEE	3/28/90	sheet 1 of 3 size
AA	M05-0089	MHT	5/16/05	chr	A. MCNEE	3/28/90	67273 A3
AB	M07-0116	AGS	2/19/07	appd	A. MCNEE	3/28/90	type Product Customer Drawing
sheet	revision	AB	AB	AB	AB		
index	sheet	1	2	3	4		

PRODUCT NUMBER NOTE 4 & 7	SIZE NOTE 4	TAIL LENGTH DIM H	DIM D	DIM G	DIM E	OVERALL LENGTH DIM L	PLATING NOTE 10
67273-XXX	2 x XXX	.177/4.50	NOTE 3	.37/.94+DIM D	.40/10.2+DIM D	.48/12.2+DIM D	30u"/.76u Au OVER 50u"/1.27u Ni
67274-XXX		.177/4.50					15u"/.38u Au OVER 50u"/1.27u Ni
67275-XXX		.177/4.50					GOLD FLASH OVER 50u"/1.27u Ni
67276-XXX		.177/4.50					120u"/3.05u Sn OVER 50u"/1.27u Ni
68513-XXX		.122/3.10					30u"/.76u Au OVER 50u"/1.27u Ni
68581-XXX		.177/4.50					30u"/.76u GXT™ OVER 50u"/1.27u Ni
68839-XXX		.177/4.50					15u"/.38u GXT™ OVER 50u"/1.27u Ni
69291-XXX		.177/4.50					DUPLEX 15u"/.38u Au & 100u"/2.54u Sn OVER 50u"/1.27u Ni
69292-XXX		.177/4.50					DUPLEX 30u"/.76u Au & 100u"/2.54u Sn OVER 50u"/1.27u Ni
69695-XXX		.177/4.50					50u"/1.27u Au OVER 50u"/1.27u Ni
78580-XXX		.122/3.10					30u"/.76u GXT™ OVER 50u"/1.27u Ni
78942-XXX		.122/3.10					120u"/3.05u Sn OVER 50u"/1.27u Ni
78943-XXX		.122/3.10					15u"/.38u GXT™ OVER 50u"/1.27u Ni
78944-XXX		.122/3.10					15u"/.38u Au OVER 50u"/1.27u Ni
90350-XXX		.122/3.10					DUPLEX 30u"/.76u Au & 100u"/2.54u Sn OVER 50u"/1.27u Ni
95737-XXX	2 x XXX	.100/2.54	NOTE 3	.37/.94+DIM D	.40/10.2+DIM D	.48/12.2+DIM D	30u"/.76u GXT™ OVER 50u"/1.27u Ni

NOTES :

- MOLDING MATERIAL : HI-TEMP RESIN
PER UL 94 V-0 COLOR : BLACK
- PIN RETENTION TO BE 3 LBS/1.36 KG
MIN PER PIN IN EITHER DIRECTION.
- DIM D =
(NO. OF COLUMNS-1) TIMES .100(ENGLISH)
(NO. OF COLUMNS-1) TIMES 2.54(METRIC)
- XXX REPRESENTS NO. OF COLUMNS
(i.e. 2 x 5 PART IS -005)
-001 THRU -004 ARE NOT AVAILABLE,
-005 THRU -050 ARE AVAILABLE.
- TERMINAL MATERIAL : 3/4/HARD PHOS BRONZE ALLOY
UNS C51000
- FLATNESS IS MEASURED FROM THE BOTTOM
OF THE END STANDOFFS.
- ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE
FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5mm
MINIMUM THICK CIRCUIT BOARD. SEE APPLICATION NOTES/PROCEDURES
IF THEY ARE AVAILABLE.
- THESE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER
COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
- PLATING OPTIONS:
MAY BE EITHER GOLD OR GXT PLATED AT MANUFACTURER'S OPTION.

mat'l. code NOTES 1 & 5				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection 	product family HEADERS
ltr	ecn	no	dr	date	tolerances unless otherwise specified		title
AB					angles	.XX±.01/.3	VERTICAL 2-ROW GUIDE PIN (SLOTTED) HEADER-SOLDER TAILS
					linear	.XXX±.005/.13	
					0°±2'	.XXXX±.0020/.051	scale 2:1
			dr	S. ROYER	3/28/90		dwg no
			enr	A. MCNEE	3/28/90		sheet 2 of 3
			chr	A. MCNEE	3/28/90		size
			appd	A. MCNEE	3/28/90		A3
sheet	revision						type
index	sheet						Product Customer Drawing



FCIconnect.com

Copyright FCI

PRODUCT NUMBER NOTE 4 & 7	SIZE NOTE 4	TAIL LENGTH DIM H	DIM D	DIM G	DIM E	OVERALL LENGTH DIM L	PLATING NOTE 10
67273-XXXLF	2 x XXX	.177/4.50	NOTE 3	.37/.94+DIM D	.40/10.2+DIM D	.48/12.2+DIM D	30u"/.76u Au OVER 50u"/1.27u Ni
67274-XXXLF		.177/4.50					15u"/.38u Au OVER 50u"/1.27u Ni
67275-XXXLF		.177/4.50					GOLD FLASH OVER 50u"/1.27u Ni
67276-XXXLF		.177/4.50					100u"/2.54u PURE Sn OVER 50u"/1.27u Ni
68513-XXXLF		.122/3.10					30u"/.76u Au OVER 50u"/1.27u Ni
68581-XXXLF		.177/4.50					30u"/.76u GXT™ OVER 50u"/1.27u Ni
68839-XXXLF		.177/4.50					15u"/.38u GXT™ OVER 50u"/1.27u Ni
69291-XXXLF		.177/4.50					DUPLEX 15u"/.38u Au & 100u"/2.54u PURE Sn OVER 50u"/1.27u Ni
69292-XXXLF		.177/4.50					DUPLEX 30u"/.76u Au & 100u"/2.54u PURE Sn OVER 50u"/1.27u Ni
69695-XXXLF		.177/4.50					50u"/1.27u Au OVER 50u"/1.27u Ni
78580-XXXLF		.122/3.10					30u"/.76u GXT™ OVER 50u"/1.27u Ni
78942-XXXLF		.122/3.10					100u"/2.54u PURE Sn OVER 50u"/1.27u Ni
78943-XXXLF		.122/3.10					15u"/.38u GXT™ OVER 50u"/1.27u Ni
78944-XXXLF		.122/3.10					15u"/.38u Au OVER 50u"/1.27u Ni
90350-XXXLF		.122/3.10					DUPLEX 30u"/.76u Au & 100u"/2.54u PURE Sn OVER 50u"/1.27u Ni
95737-XXXLF	2 x XXX	.100/2.54	NOTE 3	.37/.94+DIM D	.40/10.2+DIM D	.48/12.2+DIM D	30u"/.76u GXT™ OVER 50u"/1.27u Ni

mat'l. code NOTES 1 & 5				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection 	product family HEADERS
ltr	ecn	no	dr	date	tolerances unless otherwise specified		title
AB					angles	.XX±.01/.3	VERTICAL 2-ROW GUIDE PIN (SLOTTED) HEADER-SOLDER TAILS
					linear	.XXX±.005/.13	
					0°±2'	.XXXX±.0020/.051	scale 2:1
			dr		S. ROYER	3/28/90	FCI dwg no 67273 sheet 3 of 3 size A3
			enr		A. MCNEE	3/28/90	
			chr		A. MCNEE	3/28/90	
			appd		A. MCNEE	3/28/90	
sheet index	revision sheet						type Product Customer Drawing

form: A3