


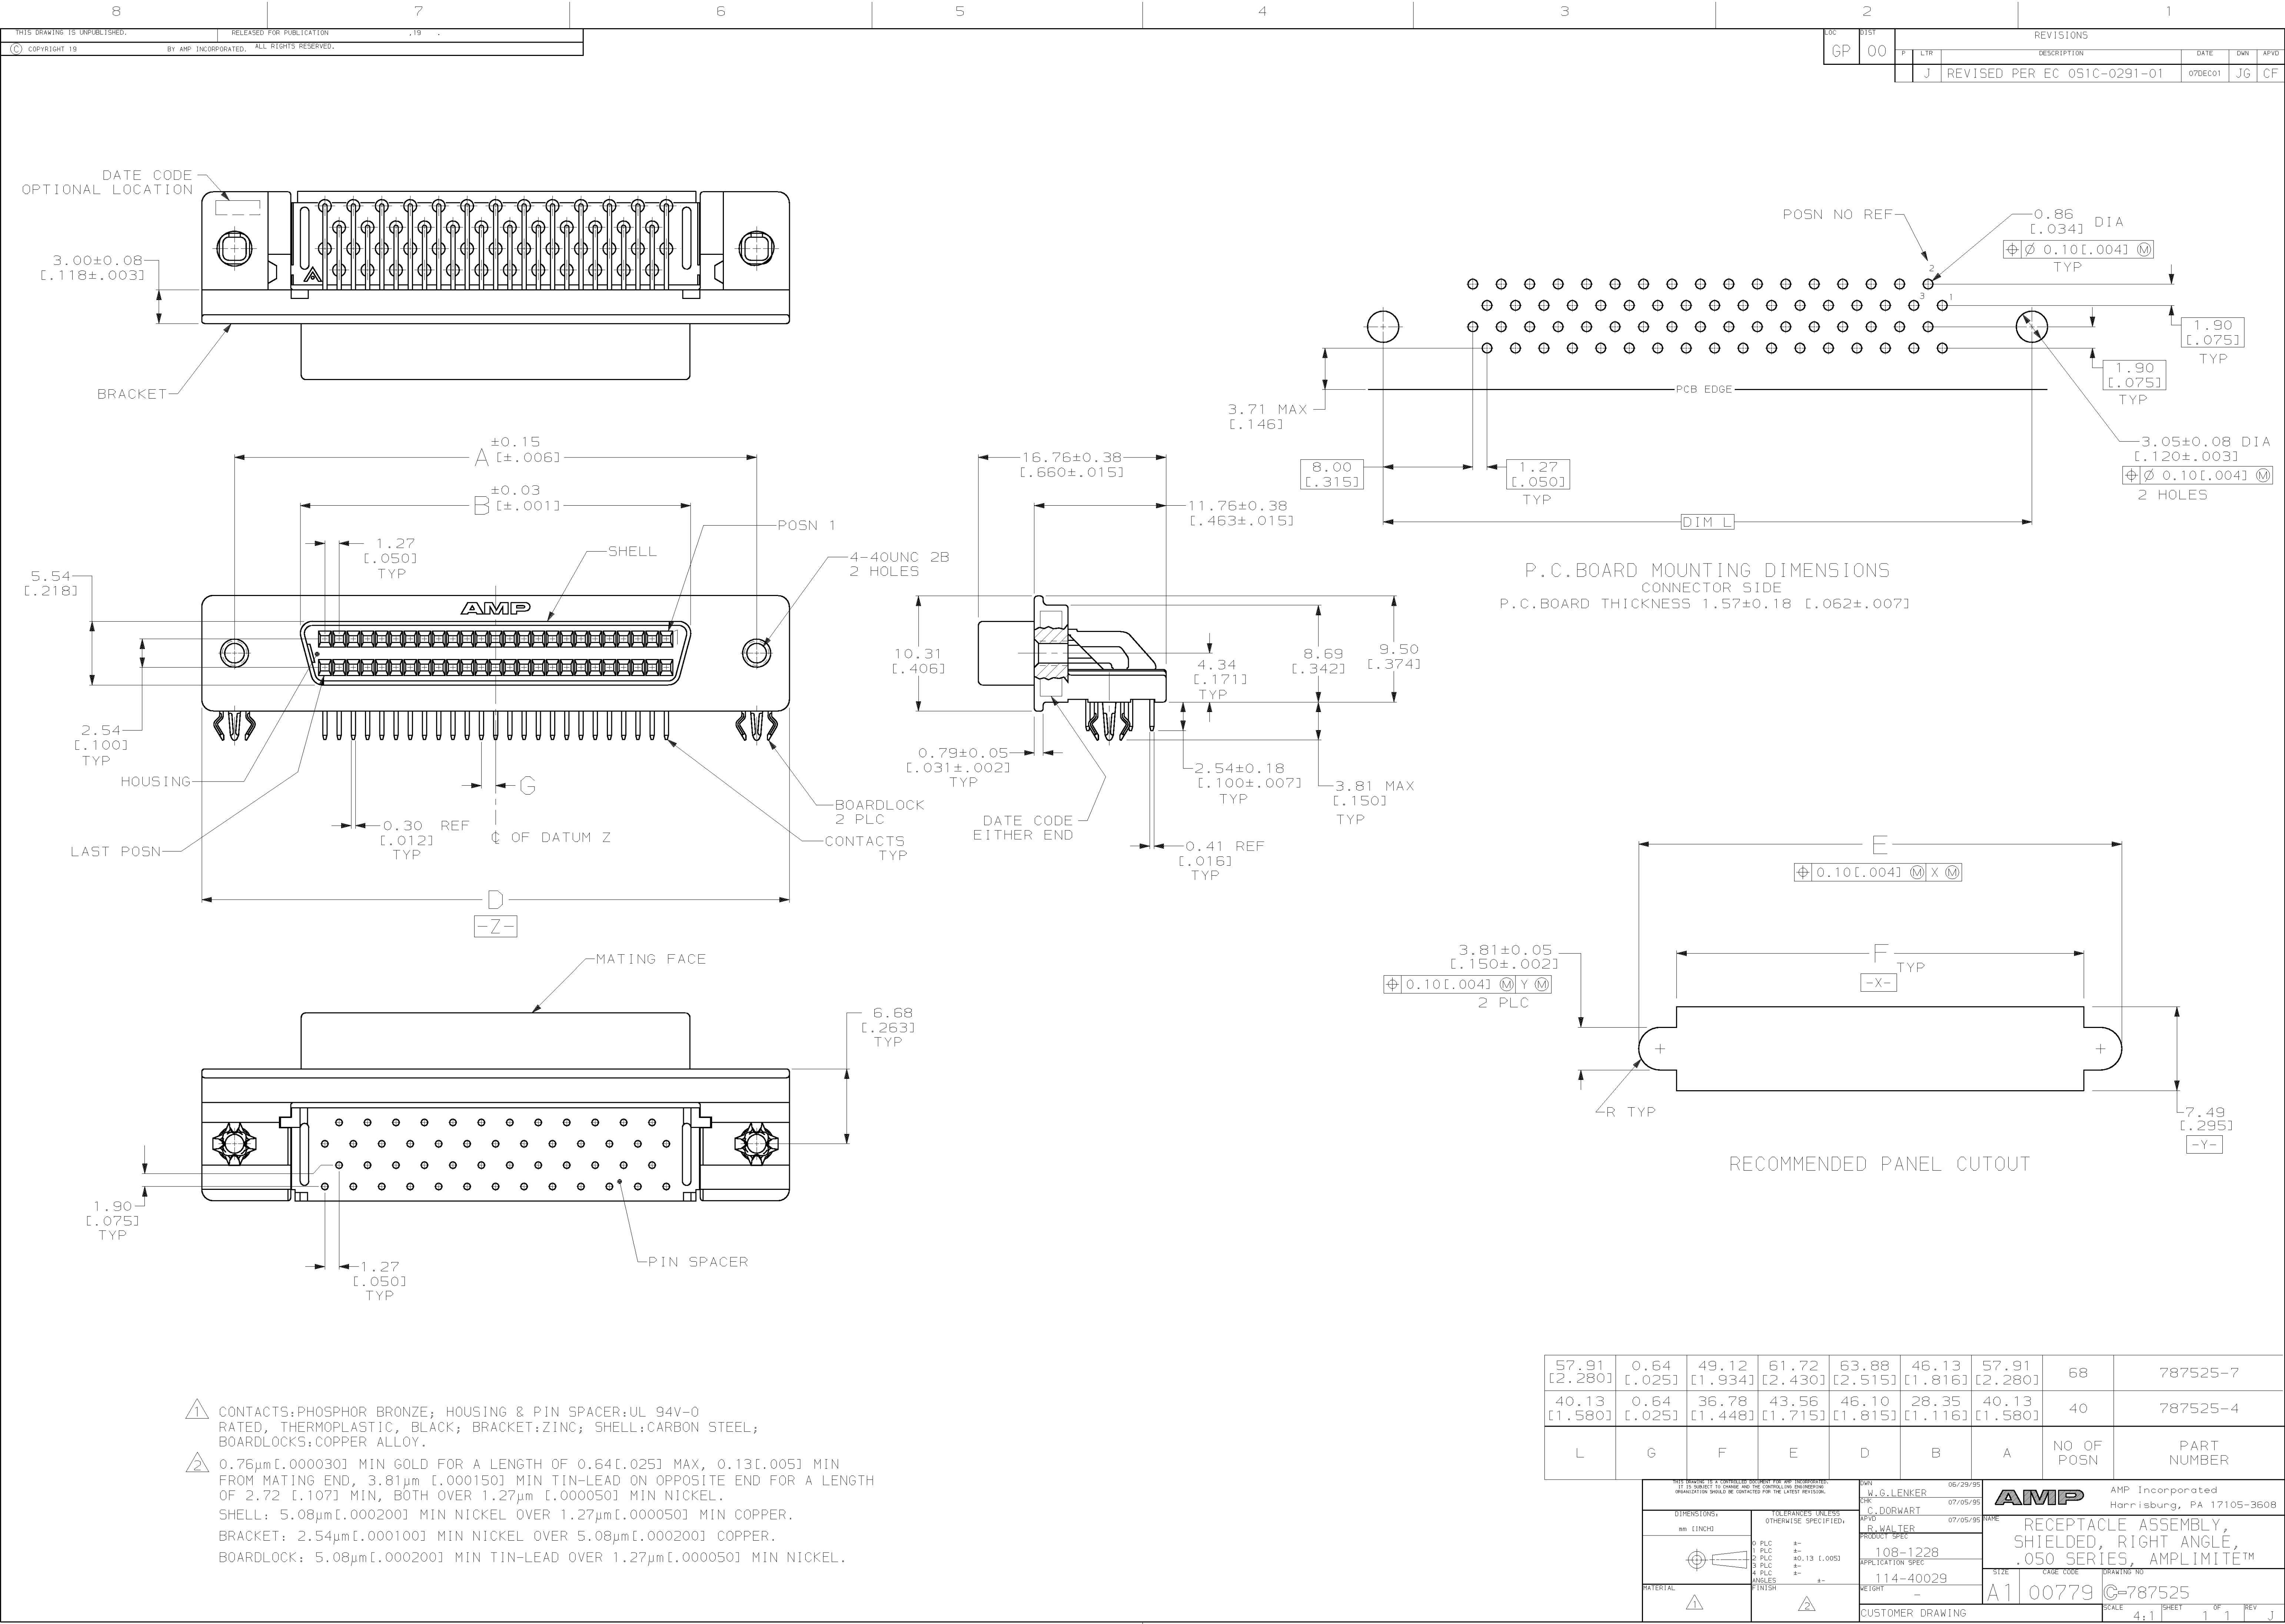

- 1 CONTACTS:PHOSPHOR BRONZE; HOUSING & PIN SPACER:UL 94V-0 RATED, THERMOPLASTIC, BLACK; BRACKET:ZINC; SHELL:CARBON STEEL; BOARDLOCKS:COPPER ALLOY.
- 2 0.76µm[.000030] MIN GOLD FOR A LENGTH OF 0.64[.025] MAX, 0.13[.005] MIN FROM MATING END, 3.81µm [.000150] MIN TIN-LEAD ON OPPOSITE END FOR A LENGTH OF 2.72 [.107] MIN, BOTH OVER 1.27µm [.000050] MIN NICKEL. SHELL: 5.08µm[.000200] MIN NICKEL OVER 1.27µm[.000050] MIN COPPER. BRACKET: 2.54µm[.000100] MIN NICKEL OVER 5.08µm[.000200] COPPER. BOARDLOCK: 5.08µm[.000200] MIN TIN-LEAD OVER 1.27µm[.000050] MIN NICKEL.

57.91 [2.280]	0.64 [.025]	49.12 [1.934]	61.72 [2.430]	63.88 [2.515]	46.13 [1.816]	57.91 [2.280]	68	787525-7
40.13 [1.580]	0.64 [.025]	36.78 [1.448]	43.56 [1.715]	46.10 [1.815]	28.35 [1.116]	40.13 [1.580]	40	787525-4
L	G	F	E	D	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT AND IS UNCLASSIFIED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHALL BE NOTIFIED FOR THE LATEST REVISION.		DWN M. G. LENKER 06/29/95	AMP Incorporated Harrisburg, PA 17105-3608	
DIMENSIONS mm (INCH)		CHK C. DORWART 07/05/95	AMP	
TOLERANCES UNLESS OTHERWISE SPECIFIED: Ø PLG ±.01 1 PLG ±.01 2 PLG ±.01 3 PLG ±.01 4 PLG ±.01 ANGLES ±.01		DRAWN R. WALTER 07/05/95	RECEPTACLE ASSEMBLY, SHIELDED, RIGHT ANGLE, .050 SERIES, AMPLIMITE™	
MATERIAL FINISH		PRODUCT SPEC 108-1228	SIZE A1	CAGE CODE 00779
		APPLICATION SPEC 114-40029	DRAWING NO C=787525	SCALE 4:1
		REIGHT -	CUSTOMER DRAWING	SHEET 1 OF 1