


RECOMMEND P.C.B. LAYOUT




CIRCUIT: SPDT

SWITCH FUNCTION	
DN	<DN>
Z-1	Z-3

$\langle \rangle$ = MOMENTARY

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERM. NDS. FOR REF. ONLY
4. RATING: 3A @120VAC or 2BVDC;
1A @250VAC.
5. FIXED TERM. & MOVING CONTACT:
Copper Alloy w/Silver plate.
6. CONTACT RESISTANCE: 20mILLI-ohms initial @2-4VDC.
7. ELECTRICAL LIFE: 60,000 make-and-break
cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -30°C to 85°C

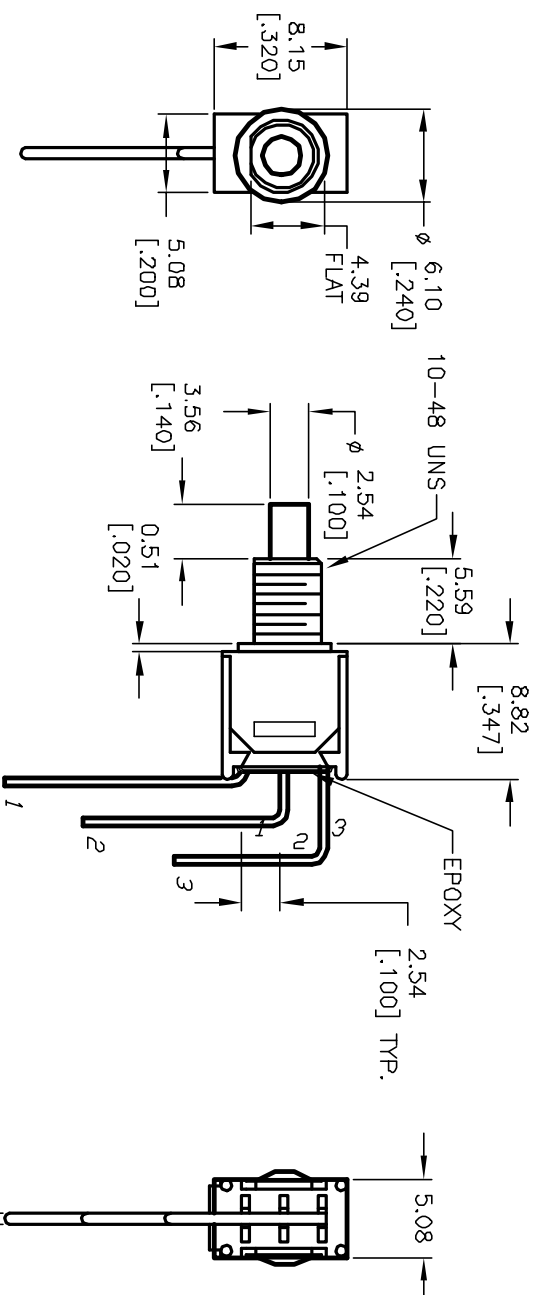

0.76 Typ.

9. DIELECTRIC STRENGTH: 1000V RMS @sea level			
10. OPERATING TEMP.: -30°C to 85°C			
A	12983	RELEASED FOR PRODUCTION	3/31/03 AR
REV.	ECN No.	DESCRIPTION	DATE CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			
TITLE		E-SWITCH® 800SP8B5M7QE	
SCALE	DATE	DR	REV
2:1	3/31/03	AR	A
		DWG	
		18222012	