

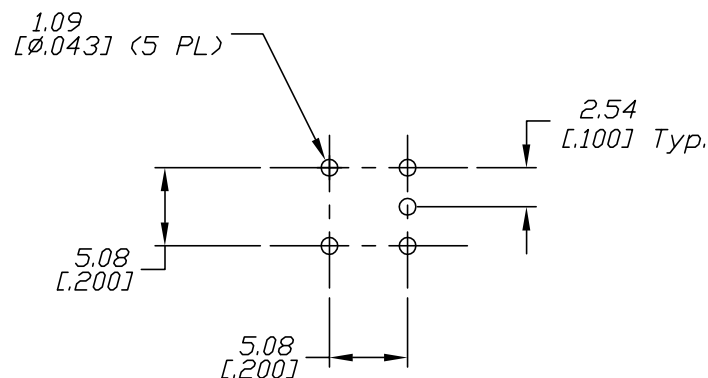


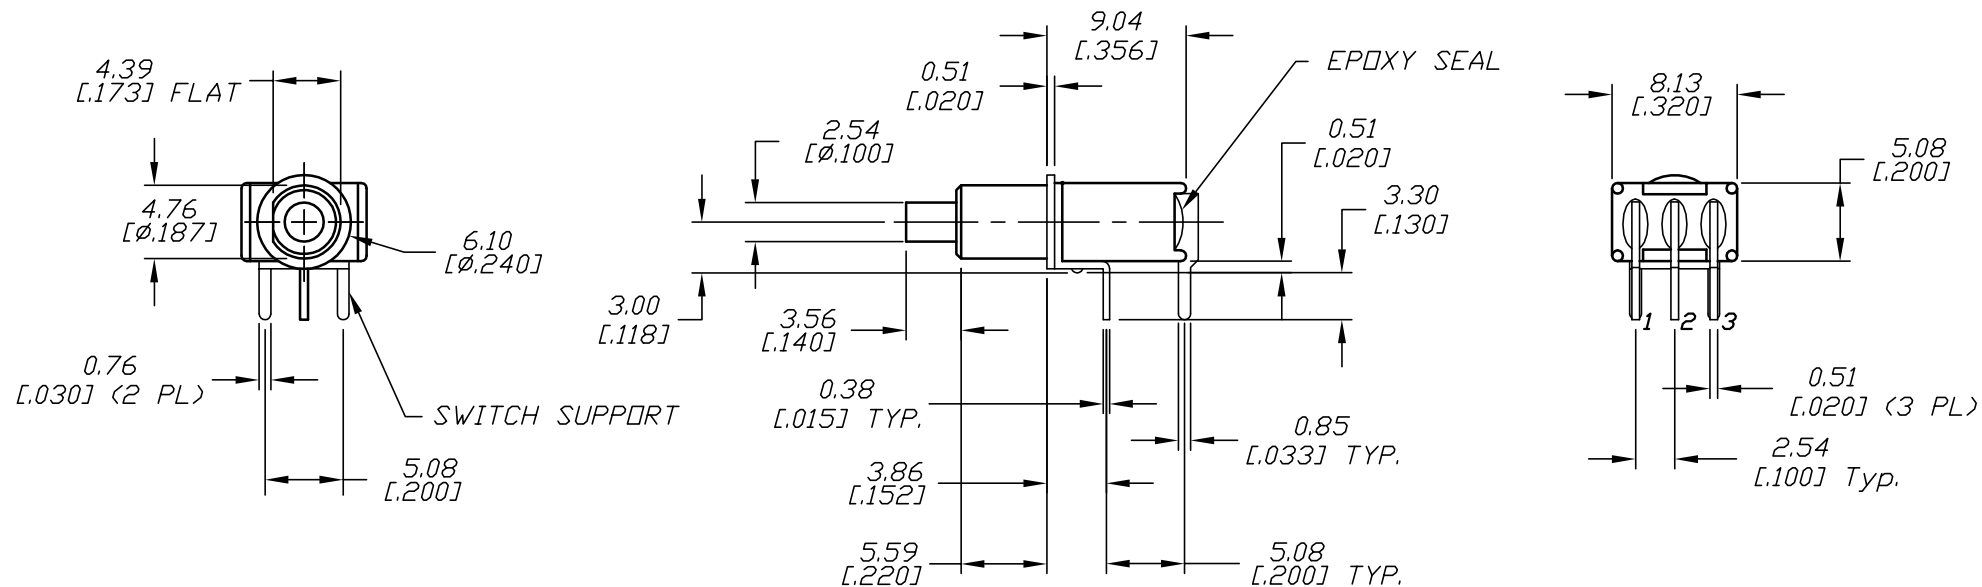

RECOMMENDED PCB LAYOUT



CIRCUIT: SPDT

CONTACT CONFIGURATION

ON	ON
2-1	2-3

()=Momentary

NOTES:

1. ALL DIMENSIONS MM [IN]
2. TERM. NOS. FOR REF ONLY
3. GENERAL TOLERANCE: $X.X \pm 0.4$, $X.XX \pm 0.25$
4. RATING: 0.4VA MAX. @20VAC OR 20VDC MAX
5. INSUL RESISTANCE: 1,000 MEGA-OHM MIN
6. ELECTRIC LIFE: 60,000 MAKE AND BREAK AT FULL LOAD
7. OPERATING TEMP: -30°C TO 85°C
8. CONTACT RESISTANCE: 20 MILLI-OHM MAX @2-4VDC;

C		REVISED AND REDRAWN	11/16/00	PML
A	-	RELEASED FOR PRODUCTION	-	-
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®				
TITLE 800 SP8 B6 M6 R E				
SCALE 2:1	DATE 5/24/94	DR TW	DWG T822003	REV C