



CIRCUIT, SPD
CONTACT CONFIGURATION

DN	<DN>
2-1	2-3

$\langle \rangle$ = Momentary

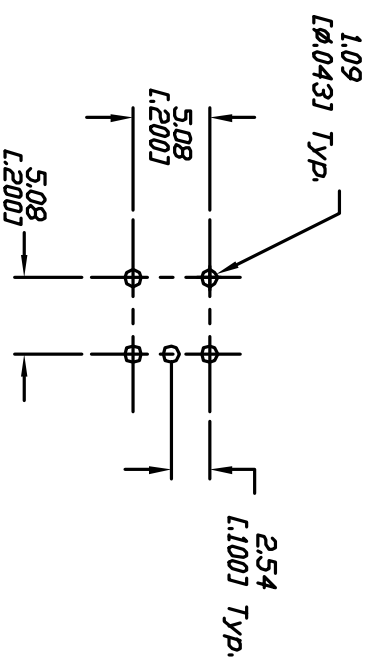

RECOMMEND P.C.B. LAYOUT

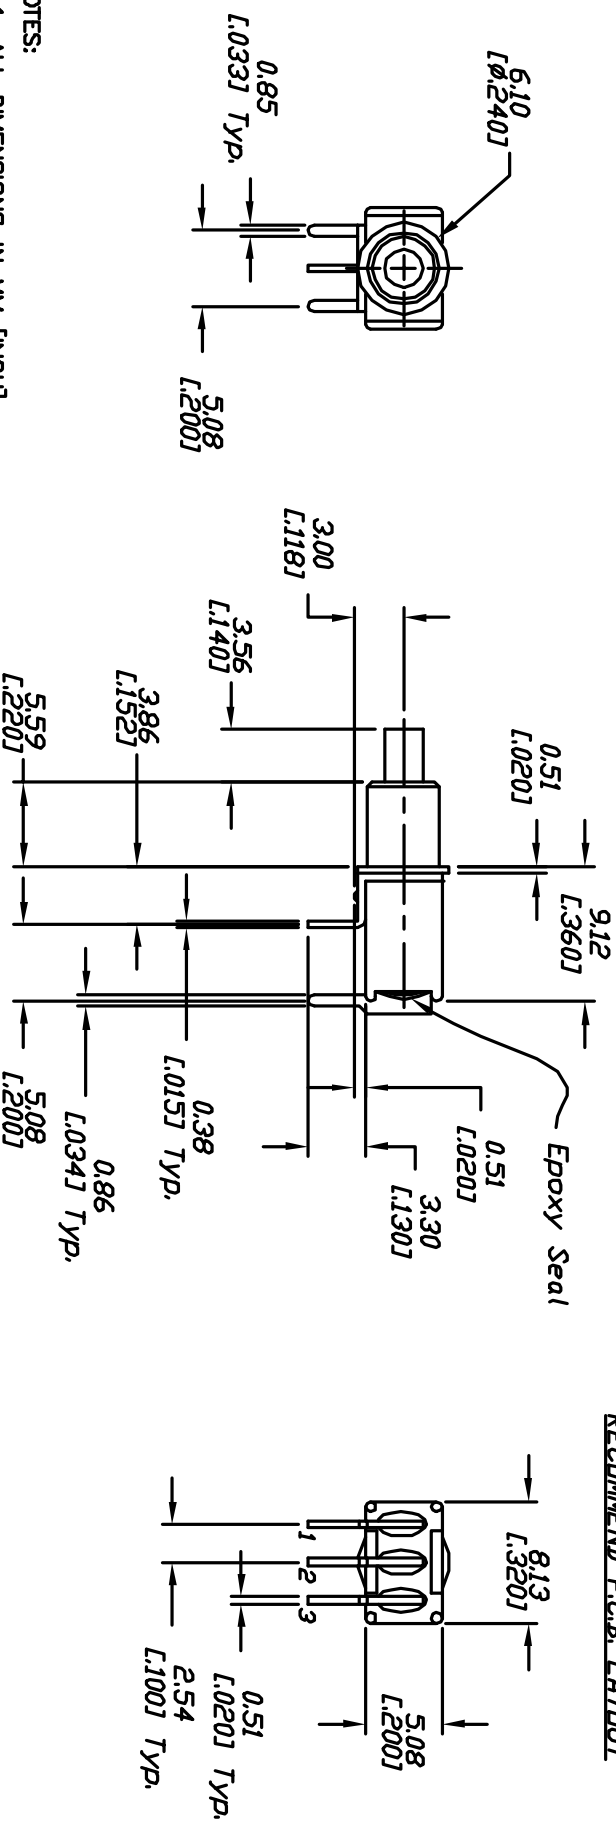

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: 0.0=±0.4
0.00=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4(VA) max. @20VAC or DC max.
5. FIXED TERMINAL & MOVING CONTACT: Cu alloy w/ Gold plate
over Nickel plate.
6. ELECTRICAL LIFE: 60,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1,000V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C

E-SWITCH®			
TITLE			
800 SP-8 B7 M6 R E			
SCALE	DATE	DR	DWG
2:1	7/27/99	MM	T833039
REV		REV	
A		A	