

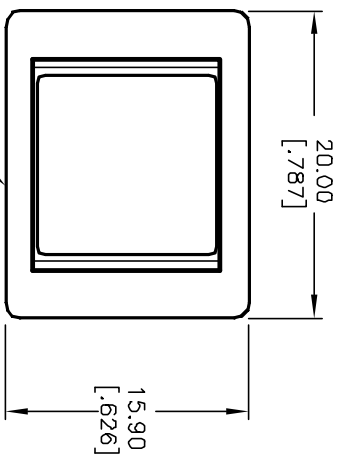


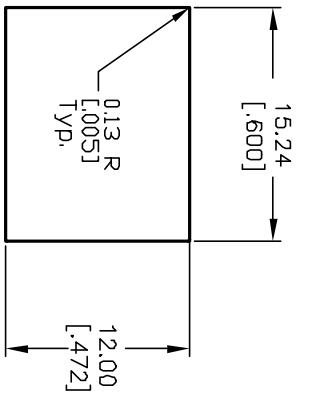

RECOMMENDED PANEL LAYOUT




CIRCUIT: SPDT

SWITCH FUNCTION	
DN	<DN>
2-1	2-3

(>) =MENTARY

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 3A @120V or 28VDC;
1A @250VAC
5. FIXED TERM. & MOVING CONTACT:
Copper Alloy w/SILVER plate.
6. CONTACT RESISTANCE:
20milli-ohms initial @2-4VDC.
7. ELECTRICAL LIFE: 60,000 make-and-break
cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -30°C to 85°C

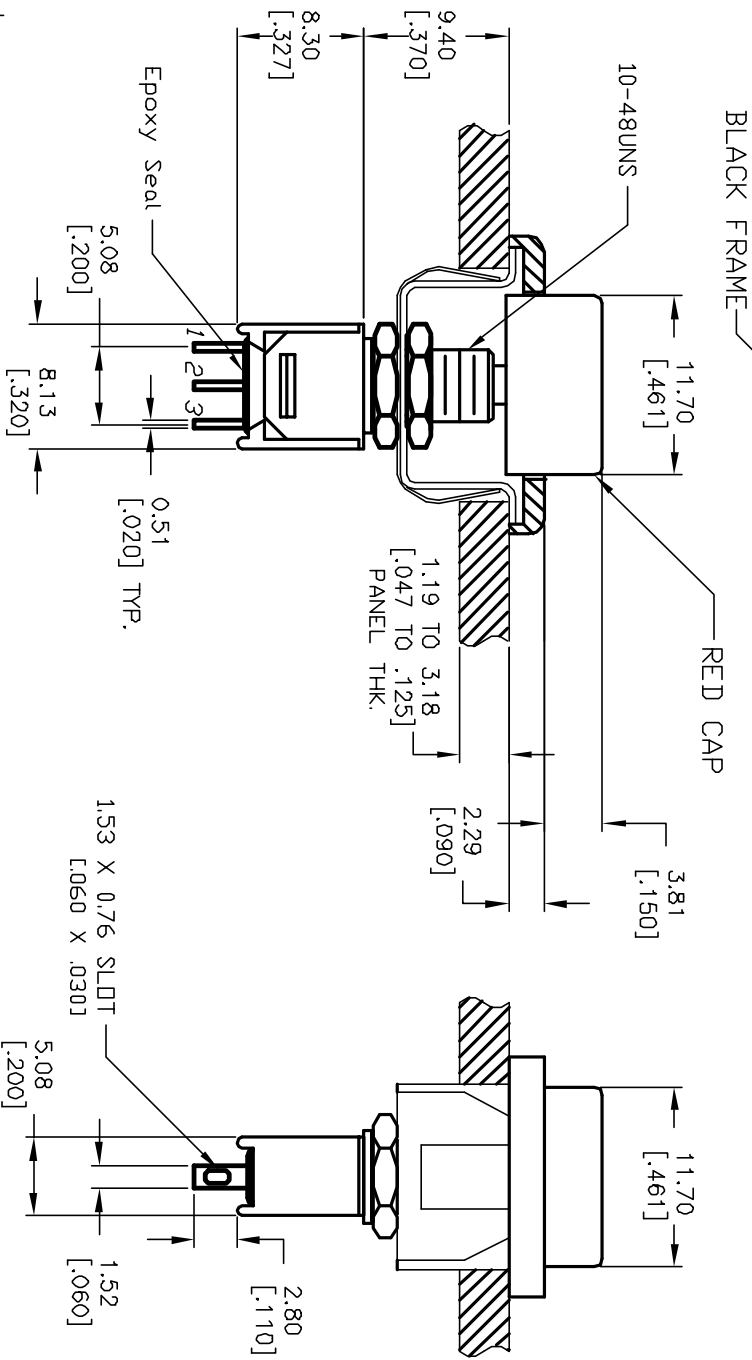

E-SWITCH®

TITLE		800 SP-8 M1 Q E DP1 -BLACK/RED	
REV.	ECN No.	RELEASED FOR PRODUCTION	DATE
A	12095	4/25/02	CJB
DESCRIPTION		DATE	CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED		SCALE	DATE
		2:1	4/25/02
		DR	CJB
		DWG	T822004
		REV	A