



RECOMMENDED P.C.B. LAYOUT




CONTACT CONFIGURATION



NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 3A @120V or 28VDC;
1A @250VAC
5. FIXED TERM. & MOVING CONTACT:
Copper Alloy w/SILVER plate.
6. CONTACT RESISTANCE:
20mILLI-ohms initial @2-4VDC.
7. ELECTRICAL LIFE: 60,000 make-and-break
cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -30°C to 85°C

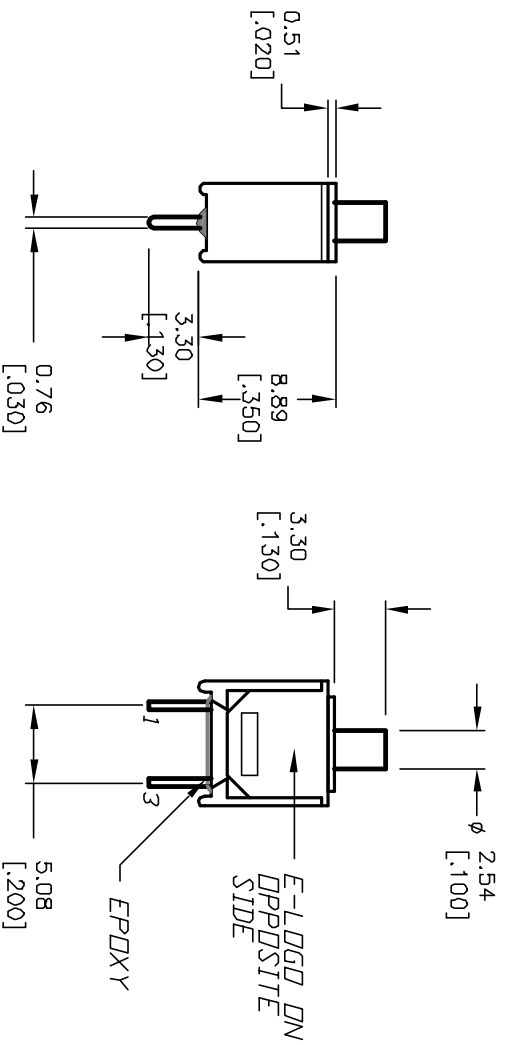

TITLE				800 SP-9 B10 M2 Q E			
SCALE				2:1			
DATE				--			
DR				--			
DWG				T811012			
REV				A			

RELEASED		7/23/02		CJB	
DESCRIPTION		DATE		CHKD	
ECN No.					
REV.					

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®