

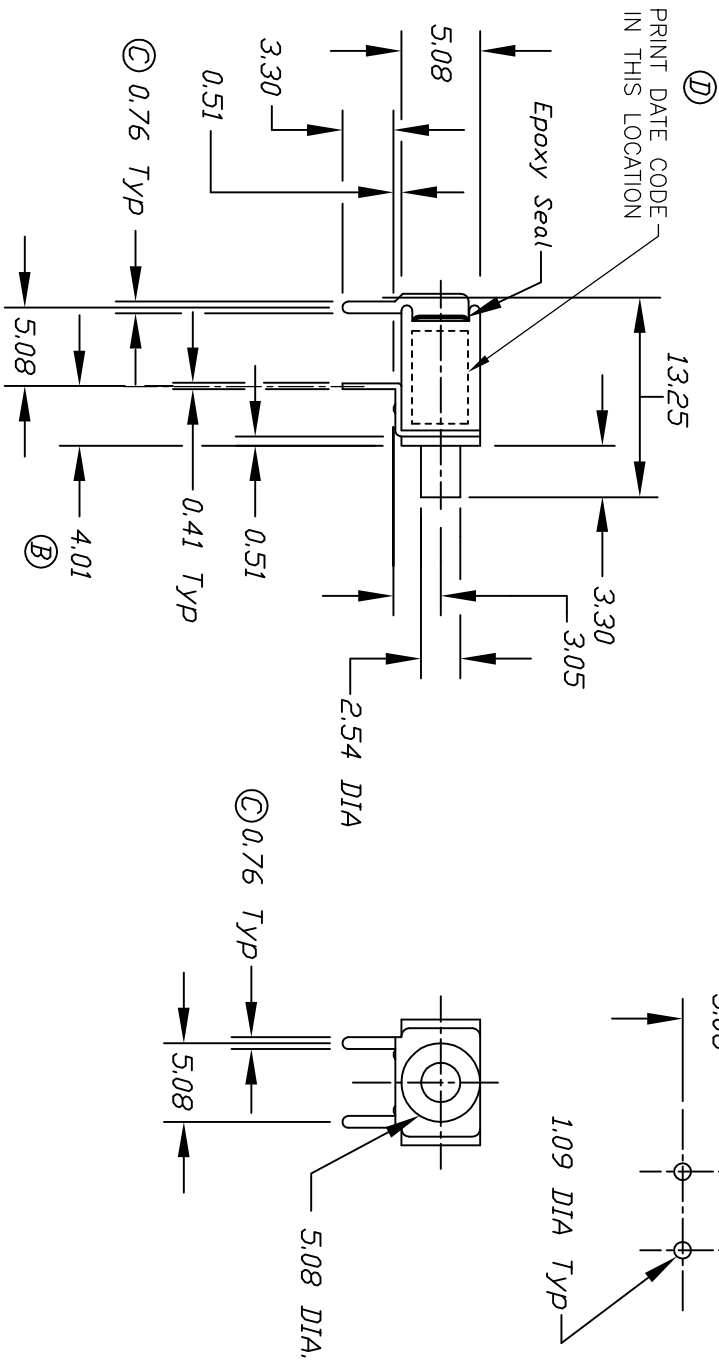
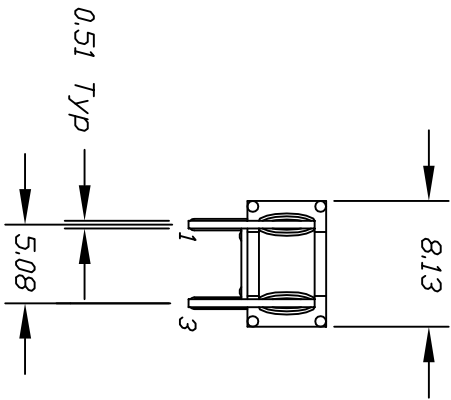


RECOMMEND P.C.B. LAYOUT

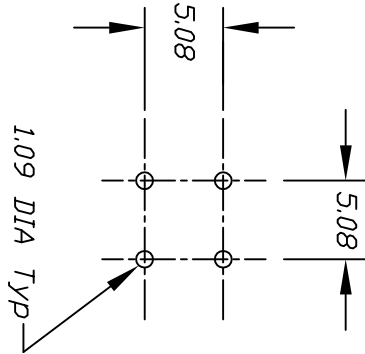

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: 0.0=±0.4
0.00=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 0.4(VA) max. @20VAC or DC max.
5. FIXED TERM. & MOVING CONTACT: Cu alloy w/ Au plate
over Ni plate.
6. ELECTRICAL LIFE: 50,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C
10. DATE CODE FORMAT: WEEK 01-52 / YEAR XX (min.)
11. 2002/95/EC (ROHS) COMPLIANT



CIRCUIT: SPST

CONTACT CONFIGURATION

OFF <ON>

< >=Momentary

D	18158	ADD DATE CODE PRINTING	6/26/08	BLR	E-SWITCH™			
C	15238	CHANGED DIMS	9/2/05	PH				
B	15084	DIMENSION 4.01 WAS 4.30	7/21/05	RC	TITLE			
REV.	ECN No.	DESCRIPTION	DATE	CHKD				
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	DR	DWG
					2:1	2/17/00	MM	T811037
					REV			
					D			