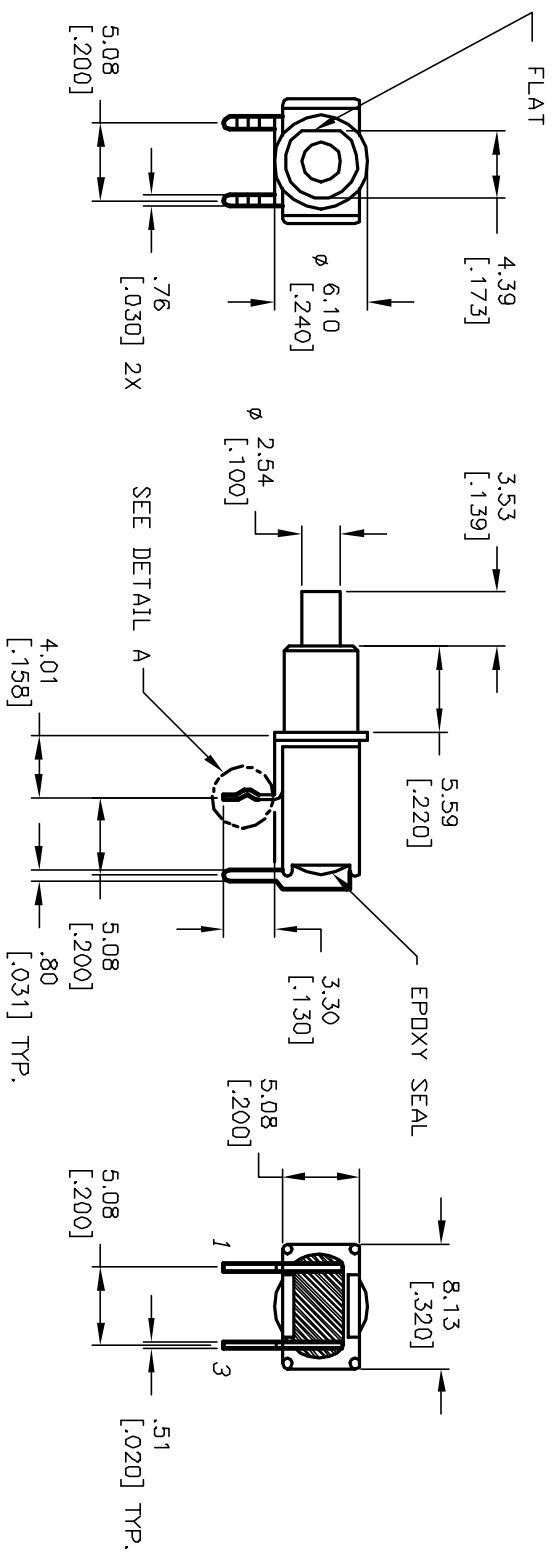



CONTACT CONFIGURATION

OFF ON

< >=Momentary

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 0.4VA @20VAC or DC max.
OVER NICKEL PLATING.
5. FIXED TERMINAL & MOVING CONTACT: Cu alloy w/Au plating
6. ELECTRICAL LIFE: 60,000 make-and-break cycle
at full load.
7. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
8. OPERATING TEMP.: -30°C to 85°C

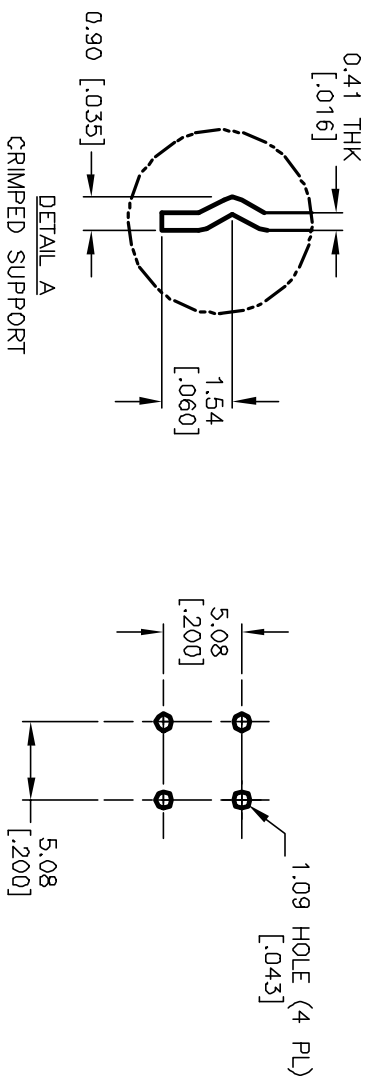

RECOMMENDED P.C.B. LAYOUT

7. DIELECTRIC STRENGTH: 1,000 V RMS @sed level.				
8. OPERATING TEMP.: -30°C to 85°C				
B	11870	REVISED AND REDRAWN	12/18/01	CJB
REV.	ECN No.	DESCRIPTION	DATE	CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				
TITLE				
800 SP9 B6 M61 R E				
E-SWITCH®				
SCALE		DATE	DR	DWG
2:1		12/18/01	CJB	T811013
				REV
				B