


RECOMMENDED P.C.B. LAYOUT

POS. 1	POS. 2
OFF	(ON)
OPEN	1-3

() = MOMENTARY


SWITCH FUNCTION





CIRCUIT: SPST

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: $x.x = \pm 0.4$
 $\blacktriangle x.xx = \pm 0.25$
- TERM. NOS. FOR REF. ONLY
- CONTACT RATING: 0.4VA MAX. @20VAC OR DC MAX.
- FIXED TERMINAL & MOVING CONTACT:
COPPER ALLOY W/GOLD PLATE
OVER NICKLE PLATE
- ELECTRICAL LIFE: 60,000 MAKE AND BREAK
 $\blacktriangle$ CYCLE AT FUL LOAD
- DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL
- OPERATING TEMP.: -30°C TO 85°C
- DENOTES CRITICAL PARAMETER

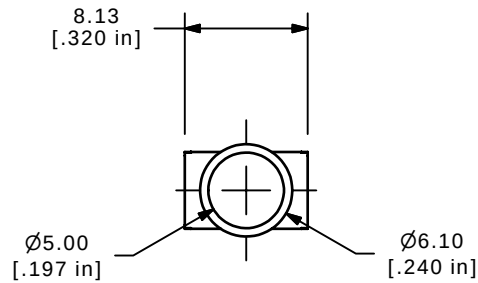

ISOMETRIC

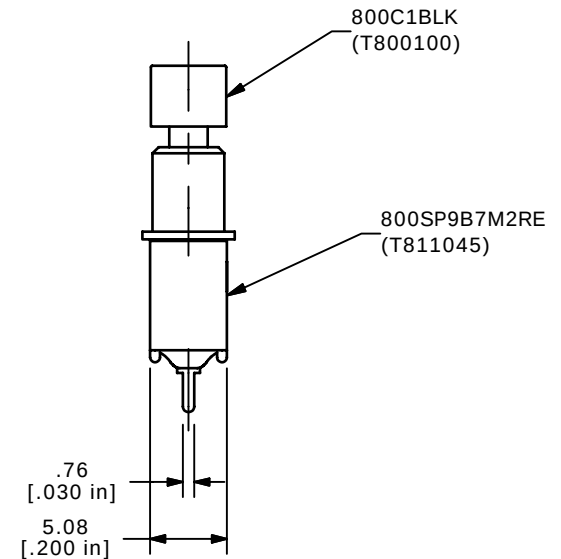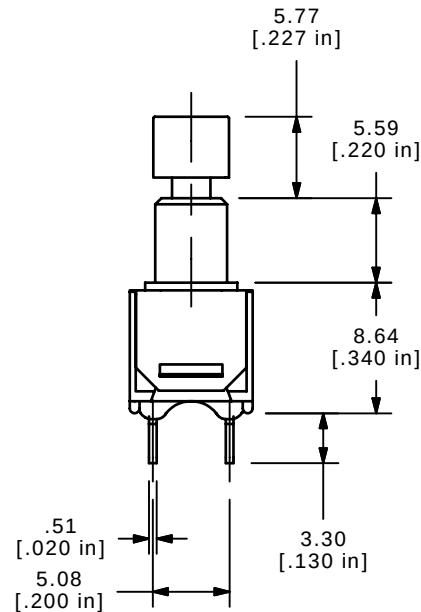

B	16202	DIM 5.77 WAS 5.39	7/3/06	CT
A	15988	NEW PART RELEASE	4/26/06	CT
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE 800SP9B7M2REC1BLK

SCALE
2:1DATE
4/26/2006DR
CTDWG
XT0063PREV
B