

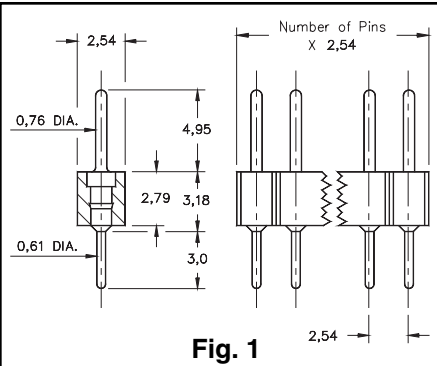


Fig. 1

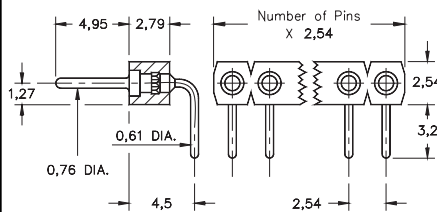


Fig. 2

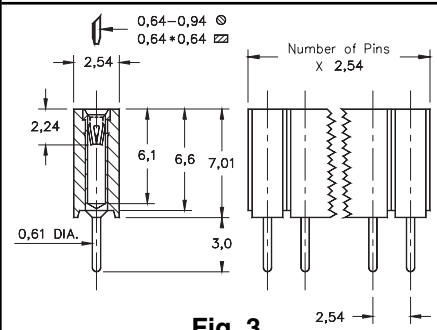


Fig. 3

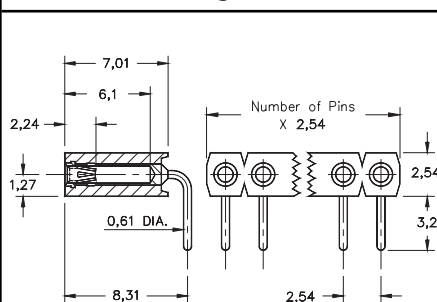


Fig. 4


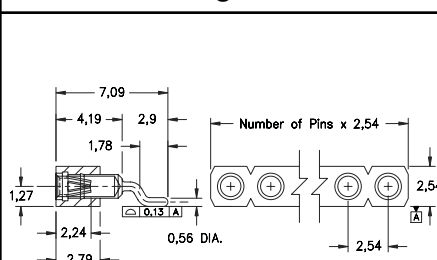


Fig. 5

- Pin interconnects available with straight MM #7007 or right angle MM #5005 solder tails. See page 173 for details.
- Sockets are available with straight MM #1304 or right angle MM #1305 solder tails. See pages 146 & 147 for details.
- MM #1304 and MM #1305 receptacles use Hi-Rel, 6-finger BeCu #47 contacts rated at 4.5 amps. Receptacles accept 0,76 diameter and 0,64 square pins. See page 211 for details.
- Insulators are high temp. thermoplastic.

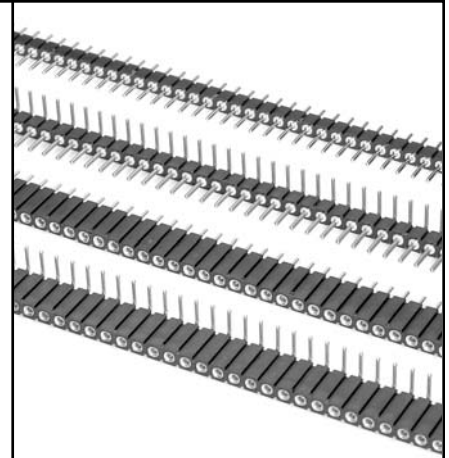

Ordering Information

Fig. 1

Series 800...10-001 Straight Pin Header

800-XX-0 _ -10-001000

Specify # of pins → 01-64

Fig. 2

Series 800...20-001 Right Angle Pin Header

800-XX-0 _ -20-001000

Specify # of pins → 02-64



**XX= Plating Code
See Below**

**For RoHS compliance
select ◇ plating code.**

SPECIFY PLATING CODE XX=	10 ◇	90	40 ◇	
Pin Plating	0,25µm Au	5,08µm Sn/Pb	5,08µm Sn	

Fig. 3

Series 801...10-001 Straight Socket

★ 44 Plating Non-Standard 801-XX-0 _ -10-001000

Specify # of pins → 01-50

Fig. 4

Series 801...20-001 Right Angle Socket

★ 44 Plating Non-Standard 801-XX-0 _ -20-001000

Specify # of pins → 01-50

Fig. 5

Series 801...40-002 SMT Right Angle Socket

801-XX-0 _ -40-002000

Specify # of pins → 02-10



**XX= Plating Code
See Below**

**For RoHS compliance
select ◇ plating code.**

SPECIFY PLATING CODE XX=		93	99		43 ◇	44 ◇
Sleeve (Pin)		5,08µm Sn/Pb	5,08µm Sn/Pb		5,08µm Sn	5,08µm Sn
Contact (Clip)		0,76µm Au	5,08µm Sn/Pb		0,76µm Au	5,08µm Sn