

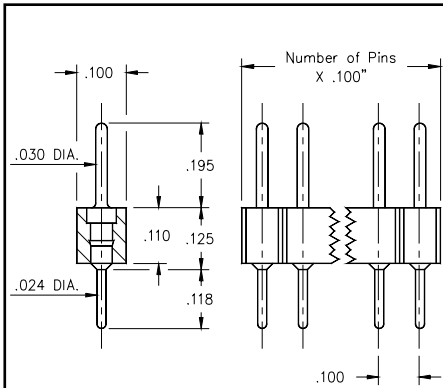


Fig. 1

- Receptacles accept .030" diameter and .025" square pins such as Series 890 and 892 pin headers.
- Pin interconnects available with straight (MM# 7007) or right angle (MM# 5005) solder tails. (See page 173 for details)
- Sockets are available with straight (MM# 1304) or right angle (MM# 1305) solder tails. (See pages 146 & 147 for details)

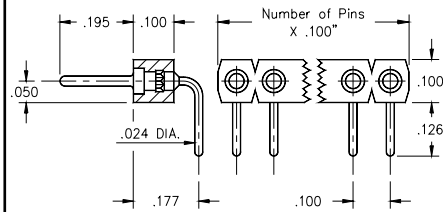
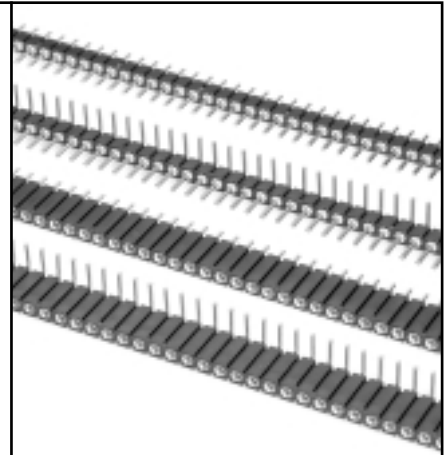


Fig. 2

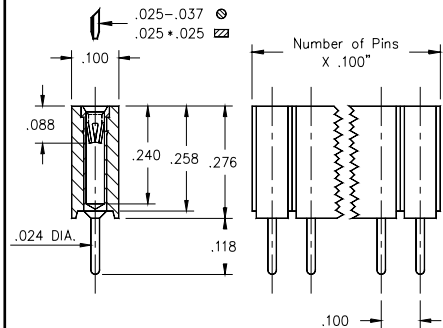


Fig. 3

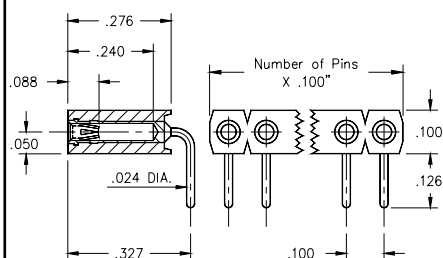


Fig. 4

Ordering Information

Fig. 1

Series 800...10-001 Straight Pin Header

800-XX-0__-10-001
Specify # of pins 01-64

Fig. 2

Series 800...20-001 Right Angle Pin Header

800-XX-0__-20-001
Specify # of pins 01-64

*XX= Plating Code
See Below*

SPECIFY PLATING CODE XX=	10	90		
Pin Plating	10μ" Au	200μ" Sn/Pb		

Fig. 3

Series 801...10-001 Straight Socket

801-XX-0__-10-001
Specify # of pins 01-50

Fig. 4

Series 801...20-001 Right Angle Socket

801-XX-0__-20-001
Specify # of pins 01-50

*XX= Plating Code
See Below*

SPECIFY PLATING CODE XX=			93	99
Sleeve (Pin)			200μ" Sn/Pb	200μ" Sn/Pb
Contact (Clip)			30μ" Au	200μ" Sn/Pb