

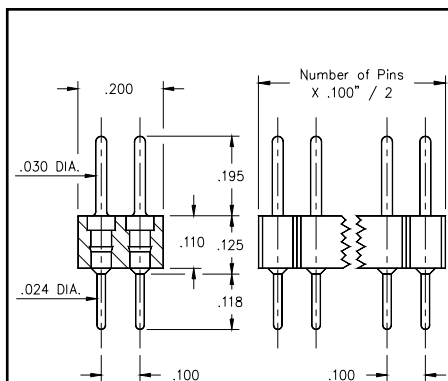


Fig. 1

- Receptacles accept .030" diameter and .025" square pins such as Series 890 and 892 pin headers.
- Pin interconnects available with straight (M-M# 7007) or right angle (M-M# 5005, 5107) solder tails. (See page 173 for details)
- Sockets are available with straight (M-M# 1304) or right angle (M-M# 1305, 1306) solder tails. (See pages 146 & 147 for details)

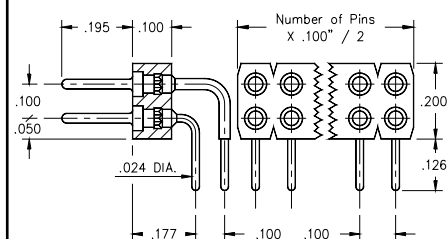
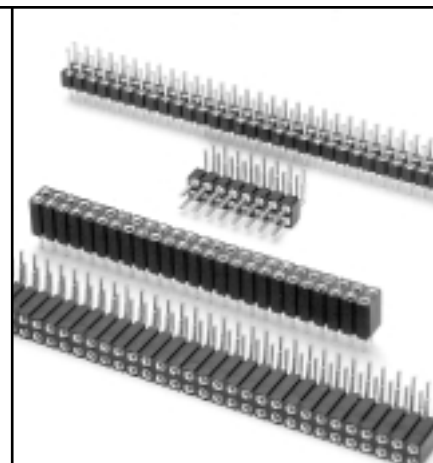


Fig. 2

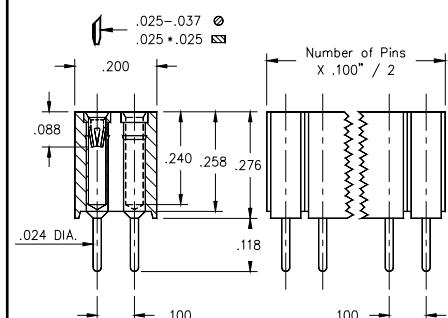


Fig. 3

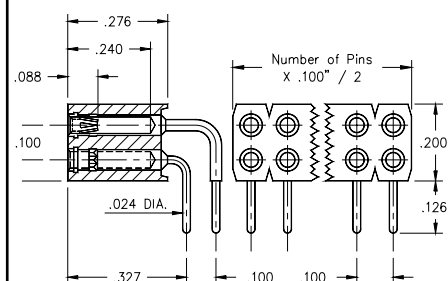


Fig. 4

Ordering Information

Fig. 1

Series 802...10-001 Straight Pin Header

802-XX-0__-10-001
Specify # of pins → 02-64

Fig. 2

Series 802...20-001 Right Angle Pin Header

802-XX-0__-20-001
Specify # of pins → 02-64

*XX= Plating Code
See Below*

SPECIFY PLATING CODE XX=	10	90		
Pin Plating	10μ" Au	200μ" Sn/Pb		

Fig. 3

Series 803...10-001 Straight Socket

803-XX-__-10-001
Specify # of pins → 002-100

Fig. 4

Series 803...20-001 Right Angle Socket

803-XX-__-20-001
Specify # of pins → 002-100

*XX= Plating Code
See Below*

SPECIFY PLATING CODE XX=			93	99
Sleeve (Pin)			200μ" Sn/Pb	200μ" Sn/Pb
Contact (Clip)			30μ" Au	200μ" Sn/Pb