

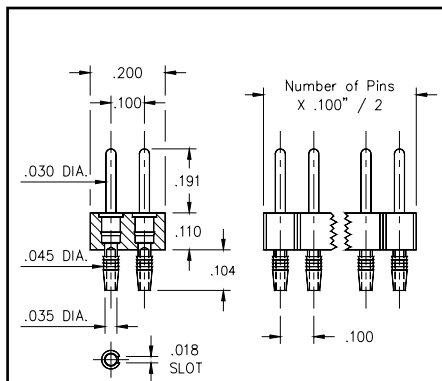


Fig. 1

- The unique compliant tail pins conform to .040" $\pm$.003 finished hole without stressing inner layers.
- Pin headers are offered in two tail lengths for .060"-.100" (M-M# 5601) and .090"-.130" (M-M# 5602) thick panels. (See page 178 for details)
- Sockets use Hi-Rel, six-finger clips which accept .030" dia. pins and also .025" square pins. (M-M# 4614 or 4615). (See page 147 for details)

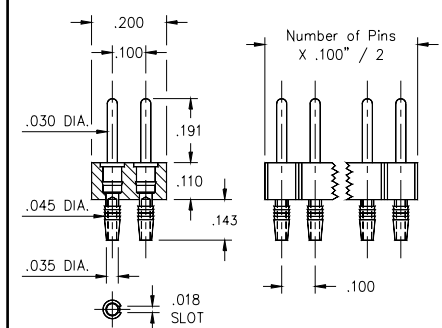


Fig. 2

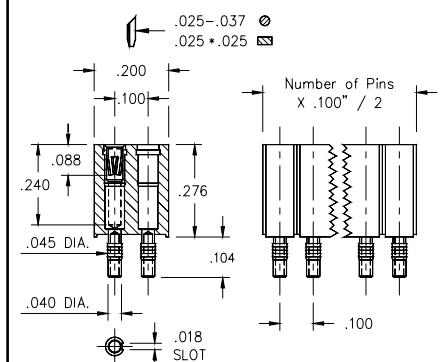


Fig. 3

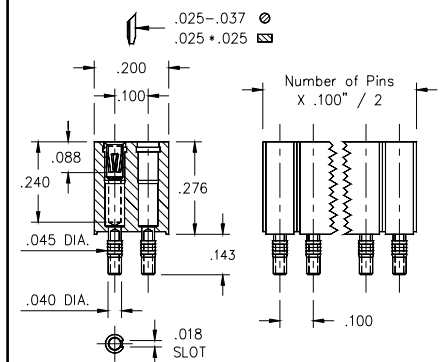


Fig. 4

Ordering Information

Fig. 1 Compliant Tail Pin Header for .060 - .100" thick boards

802-XX-0__-61-001
Specify # of pins $\rightarrow$ 02-64

Fig. 2 Compliant Tail Pin Header for .090 - .130" thick boards

802-XX-0__-62-001
Specify # of pins $\rightarrow$ 02-64

XX=
Plating Code See Below

SPECIFY PLATING CODE XX=	10	90		
Pin Plating	10 μ " Au	200 μ " Sn/Pb		

Fig. 3 Compliant Tail Socket for .060 - .100" thick boards

803-XX-__-61-001
Specify # of pins $\rightarrow$ 002-100

Fig. 4 Compliant Tail Socket for .090 - .130" thick boards

803-XX-__-62-001
Specify # of pins $\rightarrow$ 002-100

XX=
Plating Code See Below

SPECIFY PLATING CODE XX=			93	99
Sleeve (Pin)			200 μ " Sn/Pb	200 μ " Sn/Pb
Contact (Clip)			30 μ " Au	200 μ " Sn/Pb