

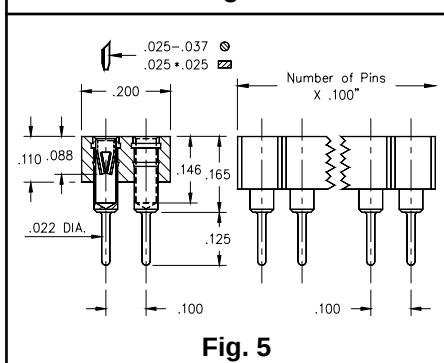
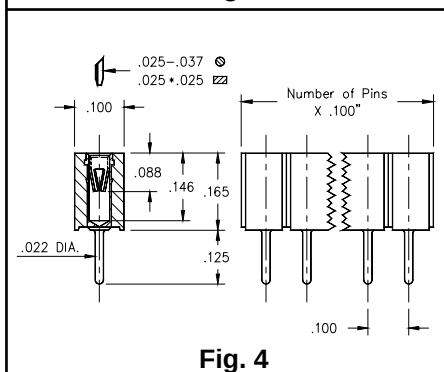
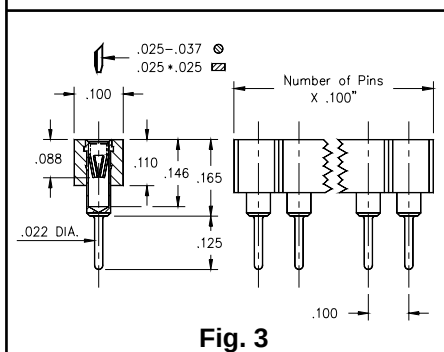


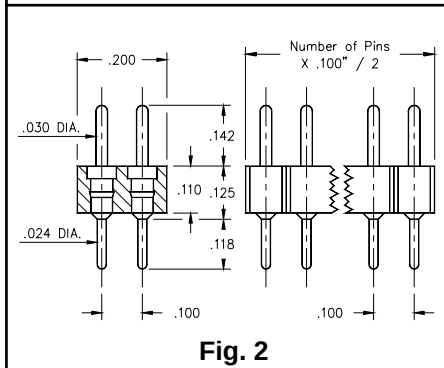

- Receptacles accept .030" diameter and .025" square pins.
- Pin headers use MM# 5016 pins. (See page 173 for details)
- Low profile sockets use MM# 1303 pins. (See page 148 for details)

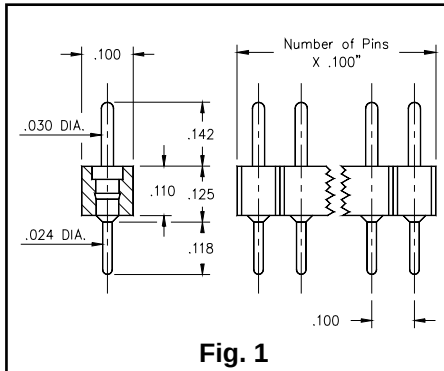

Ordering Information

Fig. 1	Single Row	Low Profile Pin Header		
	800-XX-0__-10-002	Specify # of pins	→	01-64
Fig. 2	Double Row	Low Profile Pin Header		
	802-XX-0__-10-002	Specify # of pins	→	02-64
XX= Plating Code See Below				
SPECIFY PLATING CODE XX=		10	90	
Pin Plating		10μ" Au	200μ" Sn/Pb	
Fig. 3	Single Row	Low Profile Socket (short insulator)		
	801-XX-0__-10-002	Specify # of pins	→	01-64
Fig. 4	Single Row	Low Profile Socket (long insulator)		
	801-XX-0__-10-012	Specify # of pins	→	01-36
Fig. 5	Double Row	Low Profile Socket		
	803-XX-0__-10-002	Specify # of pins	→	02-72
XX= Plating Code See Below				
SPECIFY PLATING CODE XX=			93	99
Sleeve (Pin)			200μ" Sn/Pb	200μ" Sn/Pb
Contact (Clip)			30μ" Au	200μ" Sn/Pb