


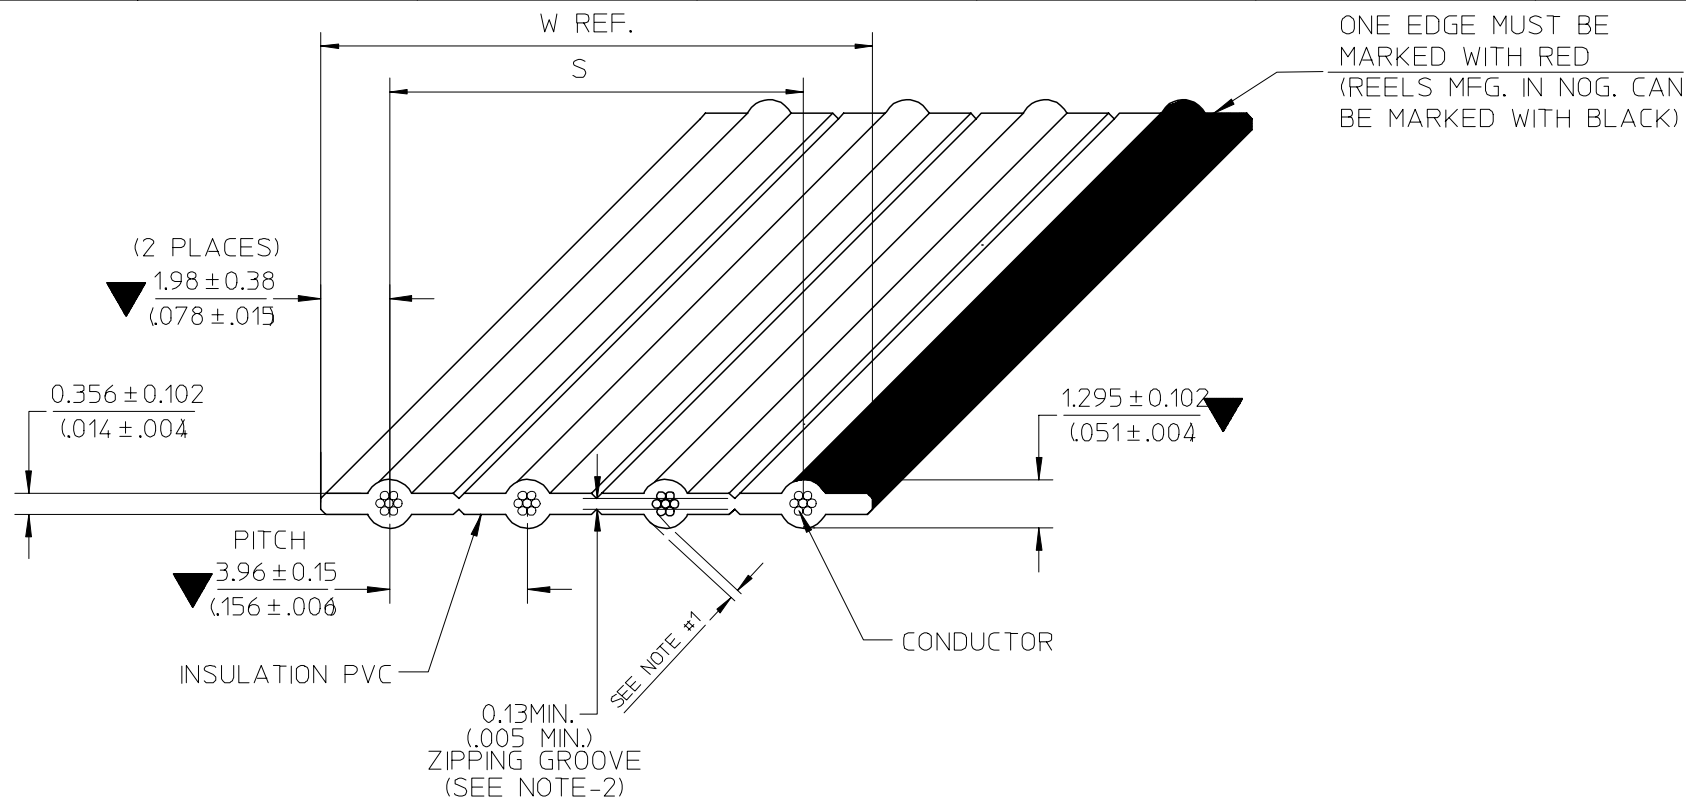

- NOTE :**
1. THE CABLE SHALL HAVE A MINIMUM OF 0.178mm. (.007") THICKNESS INSULATION AT ANY POINT
 2. RIP TEST:
 - THE 0.13mm. (.005") ZIPPING GROOVE SHALL BE CAPABLE OF BEING RIPPED BY HAND WITHIN THE RECESS, WITHOUT EXPOSING THE ADJACENT CONDUCTORS
 3. RoHS AND LEAD FREE COMPLIANT
 4. SPECIAL REQUIREMENT: N/A

B	E-07-0748	B ₂ : ADD NON-OPERATING TEMP.	07/09/27
A	N/A	B ₁ : ADD SOLDERING CONDITION	06/08/09
REV.	EC NO.	INITIAL DRAFT	DATE
HISTORY	EC NO.	DETAIL	DATE

SEE CHANGE DETAIL
EC NO: THL2008-0015
DRWN: CPANSAKHOM 2007/11/28
CHKD: DNARINTARA 2007/11/29
APPR: SVIRATJAPOL 2007/12/04

QUALITY SYMBOLS	DESCRIPTION
▽=3	
▽=0	

GENERAL TOLERANCES (UNLESS SPECIFIED)	
	mm
4 PLACES	± ---
3 PLACES	± ---
2 PLACES	± ---
1 PLACE	± ---
ANGULAR ± ---°	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE	
MM/IN	
DRAWN BY	DATE
CPANSAKHOM	2006/08/09
CHECKED BY	DATE
PMEECHAI	2006/08/09
APPROVED BY	DATE
SVIRATJAPOL	2006/08/09
MATERIAL NO.	
SEE CHART	
SIZE	
A4	

SCALE NTS	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION
TITLE		
FCB ROUND CONDUCTOR 3.96MM(.156)CENTERS PVC. 22AWG STRANDED TOPCOATED		
 MOLEX INCORPORATED		
DOCUMENT NO. SD-8868-001		SHEET NO. 1 OF 3
THIS INFORMATION THAT IS PROPRIETARY TO MOLEX SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

[illegible]

	7	6	5	4	3	2	1																																																																									
E	SPECIFICATIONS								E																																																																							
	PHYSICAL																																																																															
	CONDUCTOR SPACING _____ 3.96 (.156") C _L TO C _L																																																																															
	WIRE GAUGE _____ 22 AWG(7/30) STRANDED TOPCOATED																																																																															
	INSULATION _____ P.V.C GRAY (LEAD FREE)																																																																															
D	AGENCY								D																																																																							
	U.L. STYLE NO. _____ 2651																																																																															
	TEMPERATURE RATING _____ -20°C TO 105°C																																																																															
	VOLTAGE RATING _____ 300V.MAX.																																																																															
	FLAMMABILITY RATING _____ VW-1																																																																															
	ELECTRICAL																																																																															
	CONDUCTOR RESISTANCE (D.C.) _____ 17 m OHMS/FT. MAX.																																																																															
	CHARACTERISTIC IMPEDANCE _____ 140 OHMS NOM. (GS) 123 OHMS NOM. (GSG)																																																																															
	CAPACITANCE _____ 4.7 pF/FT. NOM. (GS) 8.5 pF/FT. NOM. (GSG)																																																																															
C	PROPAGATION DELAY _____ 1.4 ns/FT. NOM.								C																																																																							
	INSULATION RESISTANCE _____ 10 ⁴ M OHMS (10FT. SAMPLE)																																																																															
	DIELECTRIC WITHSTAND VOLTAGE _____ 2000 VRMS/MINUTE																																																																															
	GENERAL																																																																															
B	NON-OPERATING TEMPERATURE _____ -20°C TO 105°C								B																																																																							
	FAULTS AND/OR SPLICES _____ 1/REEL MAX. 100+ ³ - ₀ F.T. (30.48+ ^{0.914} - ₀ M.)/REEL 20FT. (6.096M.) MIN. LENGTH																																																																															
	SOLDERING CONDITION																																																																															
	SOLDER TEMPERATURE _____ -260°C. MAX.																																																																															
	SOLDERING TIME _____ 3 SECOND, MAX.																																																																															
	INSULATION SHRINK _____ 2MM. NOM																																																																															
A	<table border="1"><tr><td rowspan="8">SEE CHANGE DETAIL EC NO: THL2008-0015 DRWN:CPANSAKHOM 2007/11/28 CHK'D:DWARINTARA 2007/11/29 APPR:SVIRATJAPOL 2007/12/04</td><td rowspan="8">DESCRIPTION </td><td colspan="2">QUALITY SYMBOLS</td><td colspan="2">GENERAL TOLERANCES (UNLESS SPECIFIED)</td><td colspan="2">DIMENSION STYLE MM/IN</td><td>SCALE NTS</td><td>DESIGN UNITS INCH</td><td rowspan="2"> THIRD ANGLE PROJECTION</td></tr><tr><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td><td></td><td></td></tr><tr><td>4 PLACES</td><td>+---</td><td>+---</td><td>DRAWN BY CPANSAKHOM</td><td>DATE 2006/08/09</td><td colspan="2" rowspan="2">TITLE FCB ROUND CONDUCTOR 3.96MM(.156)CENTERS PVC. 22AWG STRANDED TOPCOATED</td><td colspan="2" rowspan="2">MOLEX MOLEX INCORPORATED</td><td rowspan="2">SHEET NO. 2 OF 3</td></tr><tr><td>3 PLACES</td><td>+---</td><td>+---</td><td>CHECKED BY PMEECHA I</td><td>DATE 2006/08/09</td></tr><tr><td>2 PLACES</td><td>+---</td><td>+---</td><td>APPROVED BY SVIRATJAPOL</td><td>DATE 2006/08/09</td><td colspan="2">DOCUMENT NO. SD-8868-001</td></tr><tr><td>1 PLACE</td><td>+---</td><td>+---</td><td colspan="2">MATERIAL NO.</td><td colspan="2"></td></tr><tr><td colspan="2">ANGULAR ±---°</td><td colspan="2"></td><td colspan="2"></td></tr><tr><td colspan="2">DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</td><td colspan="2"></td><td colspan="2"></td></tr><tr><td>REV B</td><td>SIZE A4</td><td colspan="9">THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</td></tr></table>								SEE CHANGE DETAIL EC NO: THL2008-0015 DRWN:CPANSAKHOM 2007/11/28 CHK'D:DWARINTARA 2007/11/29 APPR:SVIRATJAPOL 2007/12/04	DESCRIPTION 	QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION									4 PLACES	+---	+---	DRAWN BY CPANSAKHOM	DATE 2006/08/09	TITLE FCB ROUND CONDUCTOR 3.96MM(.156)CENTERS PVC. 22AWG STRANDED TOPCOATED		MOLEX MOLEX INCORPORATED		SHEET NO. 2 OF 3	3 PLACES	+---	+---	CHECKED BY PMEECHA I	DATE 2006/08/09	2 PLACES	+---	+---	APPROVED BY SVIRATJAPOL	DATE 2006/08/09	DOCUMENT NO. SD-8868-001		1 PLACE	+---	+---	MATERIAL NO.				ANGULAR ±---°						DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						REV B	SIZE A4	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									A
SEE CHANGE DETAIL EC NO: THL2008-0015 DRWN:CPANSAKHOM 2007/11/28 CHK'D:DWARINTARA 2007/11/29 APPR:SVIRATJAPOL 2007/12/04	DESCRIPTION 	QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE NTS			DESIGN UNITS INCH	THIRD ANGLE PROJECTION																																																																				
		4 PLACES	+---	+---	DRAWN BY CPANSAKHOM	DATE 2006/08/09	TITLE FCB ROUND CONDUCTOR 3.96MM(.156)CENTERS PVC. 22AWG STRANDED TOPCOATED				MOLEX MOLEX INCORPORATED		SHEET NO. 2 OF 3																																																																			
		3 PLACES	+---	+---	CHECKED BY PMEECHA I	DATE 2006/08/09																																																																										
		2 PLACES	+---	+---	APPROVED BY SVIRATJAPOL	DATE 2006/08/09	DOCUMENT NO. SD-8868-001																																																																									
		1 PLACE	+---	+---	MATERIAL NO.																																																																											
		ANGULAR ±---°																																																																														
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS																																																																														
REV B	SIZE A4	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																																																														
	tb_frame_A4_P_ME_T Rev. E 2006/04/15	6	5	4	3	2	1																																																																									

[illegible][illegible][illegible]

	7	6	5	4	3	2	1
E	SPECIFICATIONS						
D	PHYSICAL						
C	CONDUCTOR SPACING _____ 3.96 (.156") C TO C						
B	WIRE GAUGE _____ 22 AWG(7/30) STRANDED TOPCOATED						
A	INSULATION _____ P.V.C GRAY (LEAD FREE)						
	AGENCY						
	U.L. STYLE NO. _____ 2651						
	TEMPERATURE RATING _____ -20°C TO 105°C						
	VOLTAGE RATING _____ 300V.MAX.						
	FLAMMABILITY RATING _____ VW-1						
	ELECTRICAL						
	CONDUCTOR RESISTANCE (D.C.) _____ 17 m OHMS/FT. MAX.						
	CHARACTERISTIC IMPEDANCE _____ 140 OHMS NOM. (GS) _____ 123 OHMS NOM. (GSG)						
	CAPACITANCE _____ 4.7 pF/FT. NOM. (GS) _____ 8.5 pF/FT. NOM. (GSG)						
	PROPAGATION DELAY _____ 1.4 ns/FT. NOM.						
	INSULATION RESISTANCE _____ 10 ⁴ M OHMS (10FT. SAMPLE)						
	DIELECTRIC WITHSTAND VOLTAGE _____ 2000 VRMS/MINUTE						
	GENERAL						
	NON-OPERATING TEMPERATURE _____ -20°C TO 105°C						
	FAULTS AND/OR SPLICES _____ 1/REEL MAX. 100+ ⁻³ / ₀ FT. (30.48+ ^{0.914} / ₀ M.)/REEL _____ 20FT. (6.096M.) MIN. LENGTH						
	SOLDERING CONDITION						
	SOLDER TEMPERATURE _____ -260°C. MAX.						
	SOLDERING TIME _____ 3 SECOND, MAX.						
	INSULATION SHRINK _____ 2MM. NOM						
	SEE CHANGE DETAIL						
	EC NO: THL2008-0015						
	DRWN:CPANSAKHOM 2007/11/28						
	CHK'D:DWARINTARA 2007/11/29						
	APPR:SVIRATJAPOL 2007/12/04						
	REV DESCRIPTION						
	QUALITY SYMBOLS						
	GENERAL TOLERANCES (UNLESS SPECIFIED)						
	mm INCH						
	4 PLACES ± --- ± ---						
	3 PLACES ± --- ± ---						
	2 PLACES ± --- ± ---						
	1 PLACE ± --- ± ---						
	ANGULAR ± ---°						
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						
	DIMENSION STYLE MM/IN						
	DRAWN BY DATE CPANSAKHOM 2006/08/09						
	CHECKED BY DATE PMEECHA I 2006/08/09						
	APPROVED BY DATE SVIRATJAPOL 2006/08/09						
	SCALE NTS DESIGN UNITS INCH THIRD ANGLE PROJECTION						
	TITLE FCB ROUND CONDUCTOR 3.96MM(.156)CENTERS PVC. 22AWG STRANDED TOPCOATED						
	MOLEX MOLEX INCORPORATED						

[illegible]

	7	6	5	4	3	2	1																																																				
E	SPECIFICATIONS <u>PHYSICAL</u> CONDUCTOR SPACING _____ 3.96 (.156") C TO C WIRE GAUGE _____ 22 AWG(7/30) STRANDED TOPCOATED INSULATION _____ P.V.C GRAY (LEAD FREE) <u>AGENCY</u> U.L. STYLE NO. _____ 2651 TEMPERATURE RATING _____ -20°C TO 105°C VOLTAGE RATING _____ 300V.MAX. FLAMMABILITY RATING _____ VW-1 <u>ELECTRICAL</u> CONDUCTOR RESISTANCE (D.C.) _____ 17 m OHMS/FT. MAX. CHARACTERISTIC IMPEDANCE _____ 140 OHMS NOM. (GS) 123 OHMS NOM. (GSG) CAPACITANCE _____ 4.7 pF/FT. NOM. (GS) 8.5 pF/FT. NOM. (GSG) PROPAGATION DELAY _____ 1.4 ns/FT. NOM. INSULATION RESISTANCE _____ 10⁴M OHMS (10FT. SAMPLE) DIELECTRIC WITHSTAND VOLTAGE _____ 2000 VRMS/MINUTE <u>GENERAL</u> NON-OPERATING TEMPERATURE _____ -20°C TO 105°C FAULTS AND/OR SPLICES _____ 1/REEL MAX. 100⁺³₋₀ FT. (30.48^{+0.914}₋₀ M.)/REEL 20FT. (6.096M.) MIN. LENGTH <u>SOLDERING CONDITION</u> SOLDER TEMPERATURE _____ -260°C. MAX. SOLDERING TIME _____ 3 SECOND, MAX. INSULATION SHRINK _____ 2MM. NOM							E																																																			
D							D																																																				
C							C																																																				
B							B																																																				
A	<table border="1"> <tr> <td rowspan="5">SEE CHANGE DETAIL EC NO: THL2008-0015 DRWN:CPANSAKHOM 2007/11/28 CHK'D:DNARINTARA 2007/11/29 APPR:SVIRATJAPOL 2007/12/04</td><td rowspan="6">DESCRIPTION REV</td><td rowspan="6"> </td><td>QUALITY SYMBOLS</td><td colspan="2">GENERAL TOLERANCES (UNLESS SPECIFIED)</td><td>DIMENSION STYLE MM/IN</td><td>SCALE NTS</td><td>DESIGN UNITS INCH</td><td colspan="2" rowspan="4"> THIRD ANGLE PROJECTION</td></tr> <tr> <td></td><td></td><td></td><td>DRAWN BY CPANSAKHOM DATE 2006/08/09</td><td>TITLE</td><td colspan="3" rowspan="2">FCB ROUND CONDUCTOR 3.96MM(.156)CENTERS PVC. 22AWG STRANDED TOPCOATED</td></tr> <tr> <td></td><td></td><td></td><td>CHECKED BY PMEECHA I DATE 2006/08/09</td><td></td></tr> <tr> <td></td><td></td><td></td><td>APPROVED BY SVIRATJAPOL DATE 2006/08/09</td><td></td><td colspan="3">MOLEX INCORPORATED</td></tr> <tr> <td></td><td></td><td></td><td>MATERIAL NO.</td><td>DOCUMENT NO.</td><td colspan="2" rowspan="2">SD-8868-001</td><td>SHEET NO. 2 OF 3</td></tr> <tr> <td colspan="3"></td><td colspan="3">DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</td><td>SIZE A4</td><td colspan="4">THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</td></tr> </table>							SEE CHANGE DETAIL EC NO: THL2008-0015 DRWN:CPANSAKHOM 2007/11/28 CHK'D:DNARINTARA 2007/11/29 APPR:SVIRATJAPOL 2007/12/04	DESCRIPTION REV	 	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN	SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION					DRAWN BY CPANSAKHOM DATE 2006/08/09	TITLE	FCB ROUND CONDUCTOR 3.96MM(.156)CENTERS PVC. 22AWG STRANDED TOPCOATED						CHECKED BY PMEECHA I DATE 2006/08/09					APPROVED BY SVIRATJAPOL DATE 2006/08/09		MOLEX INCORPORATED						MATERIAL NO.	DOCUMENT NO.	SD-8868-001		SHEET NO. 2 OF 3				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE A4	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				A
SEE CHANGE DETAIL EC NO: THL2008-0015 DRWN:CPANSAKHOM 2007/11/28 CHK'D:DNARINTARA 2007/11/29 APPR:SVIRATJAPOL 2007/12/04	DESCRIPTION REV	 	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN	SCALE NTS				DESIGN UNITS INCH	THIRD ANGLE PROJECTION																																															
						DRAWN BY CPANSAKHOM DATE 2006/08/09	TITLE				FCB ROUND CONDUCTOR 3.96MM(.156)CENTERS PVC. 22AWG STRANDED TOPCOATED																																																
						CHECKED BY PMEECHA I DATE 2006/08/09																																																					
						APPROVED BY SVIRATJAPOL DATE 2006/08/09					MOLEX INCORPORATED																																																
						MATERIAL NO.	DOCUMENT NO.	SD-8868-001			SHEET NO. 2 OF 3																																																
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE A4	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																																				
	tb_frame_A4_P_ME_T Rev. E 2006/04/15	6	5	4	3	2	1																																																				

[illegible][illegible][illegible][illegible]

7 6 5 4 3 2 1

CHART A					SHIPPED ON	
DIMENSIONS MM. (INCHES)					100 FT. REELS	
ENG. NO.	NO.OF COND.	DIMENSION S		DIM. W (REF)	ENGINEERING NO.	ORDER NO.
8868- 2	2	3.96±0.15	(.156±.006)	7.92 (.312)	8868-02-100B	82-22-5902
8868- 3	3	7.92±0.25	(.312±.010)	11.89 (.468)	▲ -03- ▲	▲ 03
8868- 4	4	11.89±0.38	(.468±.015)	15.85 (.624)	-04-	04
8868- 5	5	15.85±0.38	(.624±.015)	19.81 (.780)	-05-	05
8868- 6	6	19.81±0.38	(.780±.015)	23.77 (.936)	-06-	06
8868- 7	7	23.77±0.38	(.936±.015)	27.74 (1.092)	-07-	07
8868- 8	8	27.74±0.38	(1.092±.015)	31.70 (1.248)	-08-	08
8868- 9	9	31.70±0.38	(1.248±.015)	35.66 (1.404)	-09-	09
8868-10	10	35.66±0.38	(1.404±.015)	39.62 (1.560)	-10-	10
8868-11	11	39.62±0.38	(1.560±.015)	43.59 (1.716)	-11-	11
8868-12	12	43.59±0.38	(1.716±.015)	47.55 (1.872)	-12-	12
8868-13	13	47.55±0.38	(1.872±.015)	51.51 (2.028)	-13-	13
8868-14	14	51.51±0.38	(2.028±.015)	55.47 (2.184)	-14-	14
8868-15	15	55.47±0.38	(2.184±.015)	59.44 (2.340)	-15-	15
8868-16	16	59.44±0.38	(2.340±.015)	63.40 (2.496)	▼ -16- ▼	▼ 16

ENGINEERING NO.

8868-XX-XXXX

A B C D

A : CABLE 3.96mm. (.156") CENTERS 22 AWG STRANDED TOPCOATED

B : CONDUCTOR SIZE (AVAILABILITY 2 THROUGH 16)

C : CABLE LENGTH 100FT. (30.48M.)

D : A = INCHES

B = FEET

SEE CHANGE DETAIL EC NO: THL2008-0015 DRWN:CPANSAKHOM 2007/11/28 CHKD:DNARINTARA 2007/11/29 APPR:SVIRATJAPOL 2007/12/04	DESCRIPTION REV	QUALITY SYMBOLS ▽ = C =	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM/IN		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION				
				mm	INCH	DRAWN BY CPANSAKHOM	DATE 2006/08/09	TITLE FCB ROUND CONDUCTOR 3.96MM(.156)CENTERS PVC. 22AWG STRANDED TOPCOATED MOLEX MOLEX INCORPORATED						
			4 PLACES	± ---	± ---	CHECKED BY PMEECHAI	DATE 2006/08/09							
			3 PLACES	± ---	± ---	APPROVED BY SVIRATJAPOL	DATE 2006/08/09							
			2 PLACES	± ---	± ---	MATERIAL NO. SEE CHART		DOCUMENT NO. SD-8868-001		SHEET NO. 3 OF 3				
			1 PLACE	± ---	± ---	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								
			ANGULAR ± ---°											
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS											