

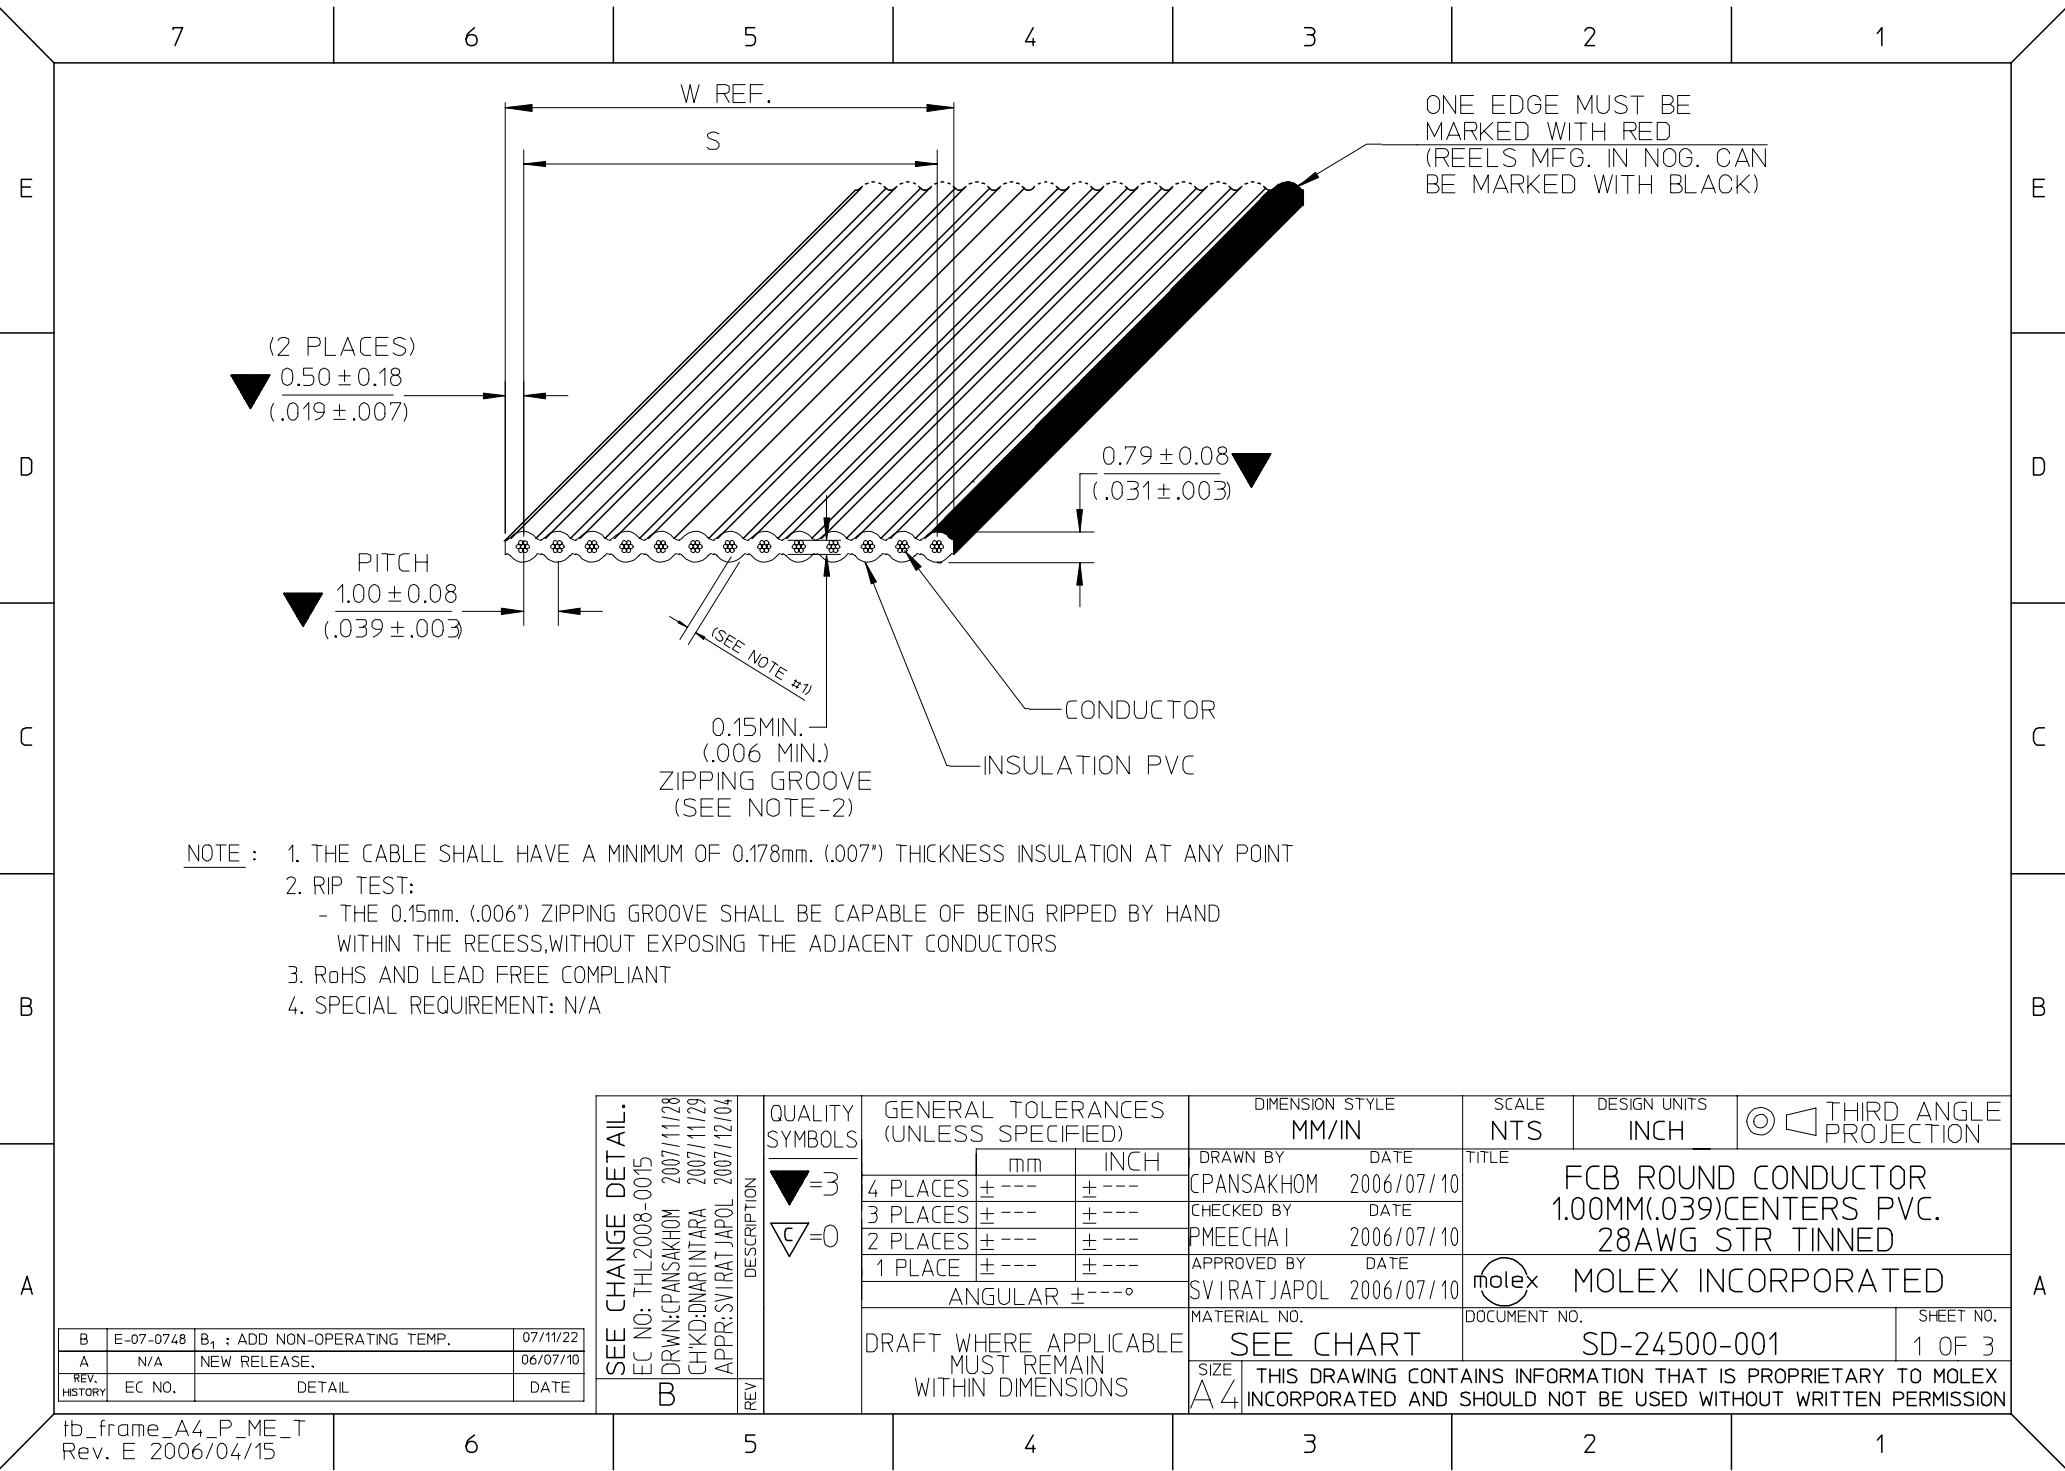


CHART A				
DIMENSIONS MM. (INCHES)				
ENGINEERING NO.	ORDER NO.	NO. OF CONDUCTOR	DIMENSION S	DIM. W (REF.)
24500-10-100B	82-28-3010	10	9.00±0.18 (.354±.007)	10.00 (.394)
↑ -20- ↑	↑ 20	20	19.00±0.23 (.748±.009)	20.00 (.787)
↑ -24- ↑	↑ 24	24	23.00±0.23 (.906±.009)	24.00 (.945)
↑ -26- ↑	↑ 26	26	25.00±0.23 (.984±.009)	26.00 (1.024)
↑ -30- ↑	↑ 30	30	29.00±0.28 (1.142±.011)	30.00 (1.181)
↑ -34- ↑	↑ 34	34	33.00±0.28 (1.299±.011)	34.00 (1.339)
↑ -40- ↑	↑ 40	40	39.00±0.28 (1.535±.011)	40.00 (1.575)
↑ -44- ↑	↑ 44	44	43.00±0.28 (1.693±.011)	44.00 (1.732)
24500-50-100B	82-28-3050	50	49.00±0.28 (1.929±.011)	50.00 (1.969)

ENGINEERING NO.

24500-XX-XXXX

A B C D

A : CABLE 1.00mm. (.039") CENTERS 28AWG STRANDED TINNED

B : CONDUCTOR SIZE (AVAILABILITY 10,20,24,26,30,34,40,44 AND 50)

C : CABLE LENGTH 100FT. (30.48M.)

D : A = INCHES

B = FEET

SEE CHANGE DETAIL: EC NO: THL2008-0015 DRWN:CPANSAKHOM 2007/11/128 CHK'D:UNARINTARA 2007/11/129 APPR:SVIRATJAPOL 2007/12/104	DESCRIPTION	QUALITY SYMBOLS ▽ = ▽C =	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM/IN		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY CPANSAKHOM	DATE 2006/07/10	TITLE FCB ROUND CONDUCTOR 1.00MM(.039)CENTERS PVC. 28AWG STR TINNED					
			4 PLACES	± ---	± ---	CHECKED BY PMEECHAI	DATE 2006/07/10						
			3 PLACES	± ---	± ---								
			2 PLACES	± ---	± ---	APPROVED BY SVIRATJAPOL	DATE 2006/07/10	molex MOLEX INCORPORATED					
			1 PLACE	± ---	± ---								
			ANGULAR ± ---°			MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE CHART		SD-24500-001		3 OF 3			
						SIZE A4	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						