




- Modular contacts for use on 2,54 grid, available in five heights from 3,48 to 5,99, supplied in single and double row contact strips.
- Precision machined piston / base and gold plated components assure a 1,000,000 min. cycle life.
- Pistons have a long stroke relative to the low profile of the assembly.
- Low resistance, high current contacts are rated at 2 amps continuous, 3 amps peak.
- High temperature thermoplastic insulators are suitable for surface mount processes.
- 821 & 823 series contact strips are designed for manual placement into Ø0,56± 0,08 plated-thru-holes in the circuit board prior to hand, wave or reflow soldering.

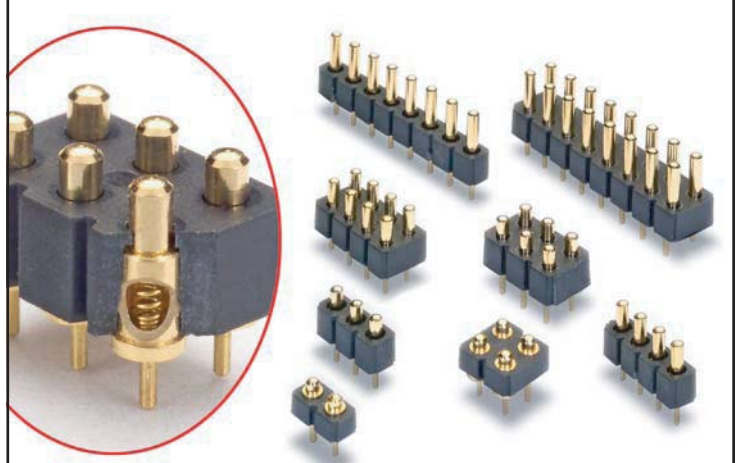

SINGLE ROW Series 821

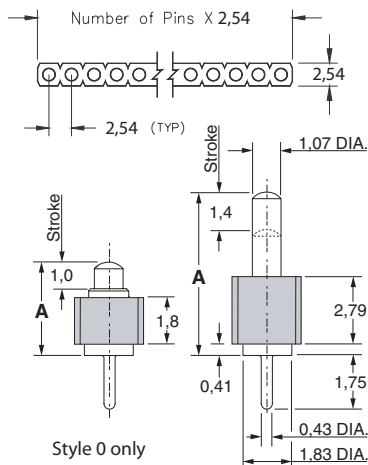

DOUBLE ROW Series 823

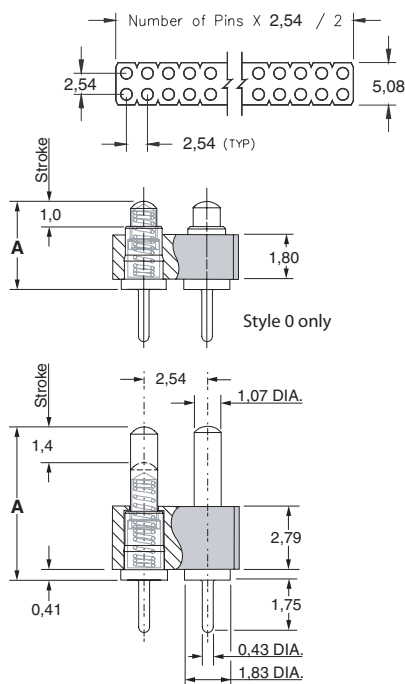

Ordering Information

Single Row Series 821

821-22-0XX-10-00X-101

Specify # of contacts

Specify contact style 0-4

02-64

Double Row Series 823

823-22-0XX-10-00X-101

Specify # of contacts

Specify contact style 0-4

04-72

CONTACT STYLE	INITIAL HEIGHT A
0	3,48
1	4,5
2	5,0
3	5,51
4	5,99

Technical Specifications

Materials:

Contact piston & Base: Machined copper alloy plated 0,51µm gold over 2,54µm nickel

Spring: Beryllium copper plated 0,25µm gold

Insulator: High temp. thermoplastic rated UL94 V-0

Mechanical:

Spring force @ initial height (A): 25 grams

Spring force @ mid stroke (B/2): 60 grams

Spring force @ full stroke (B): 95 grams

Durability: 1,000,000 cycles min.

Electrical:

Voltage rating: 100Vrms/150Vdc

Current rating: 2A (continuous), 3A (peak) per contact

Contact resistance: 20mΩ max.

Insulation resistance: 10,000MΩ min.

Dielectric strength: 700Vrms min.

Capacitance: 1pF max.

