

Fig. 1

- Series 830 & 832 use MM #3790 & MM #3796 pins. See page 167 for details.
- Series 831 & 833 use MM #1805 and MM #3805 receptacles and accept pin diameters from .015"-.025". See page 138 for details.
- Receptacles use Hi-Rel, 6 finger BeCu #43 contact rated at 3 amps. See page 209 for details.
- Insulators are high temp. thermoplastic.

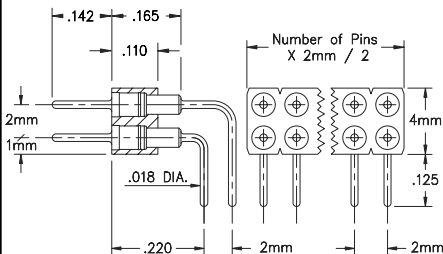


Fig. 2

Fig. 1

830...001 Single Row Right Angle Header

830-XX-0__-20-001000

Specify # of pins → 01-50

Fig. 2

832...001 Double Row Right Angle Header

832-XX-__-20-001000

Specify # of pins → 002-100

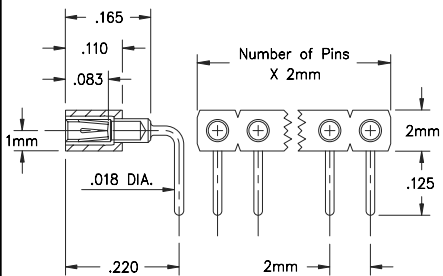


Fig. 3



**XX= Plating Code
See Below**

For RoHS compliance
select ◇ plating code.

SPECIFY PLATING CODE XX=	10 ◇			
Pin Plating	10μ" Au			

Fig. 3

831...001 Single Row Right Angle Socket

831-XX-0__-20-001000

Specify # of pins → 01-50

Fig. 4

833...001 Double Row Right Angle Socket

833-XX-__-20-001000

Specify # of pins → 002-100



**XX= Plating Code
See Below**

For RoHS compliance
select ◇ plating code.

SPECIFY PLATING CODE XX=						43 ◇	
Sleeve (Pin)						200μ" Sn	
Contact (Clip)						30μ" Au	