


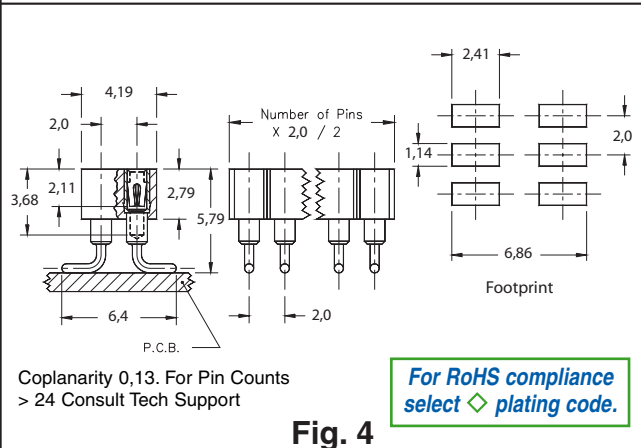
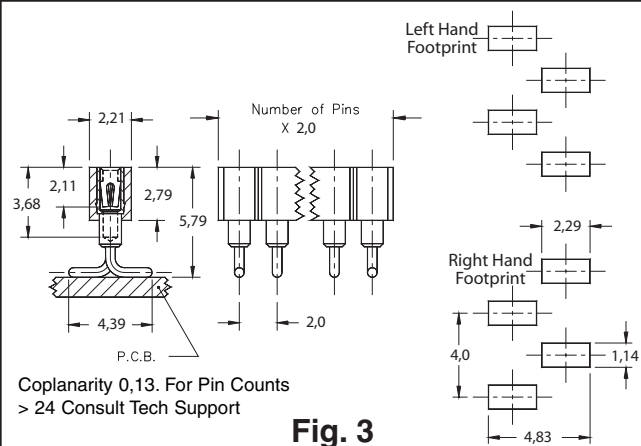


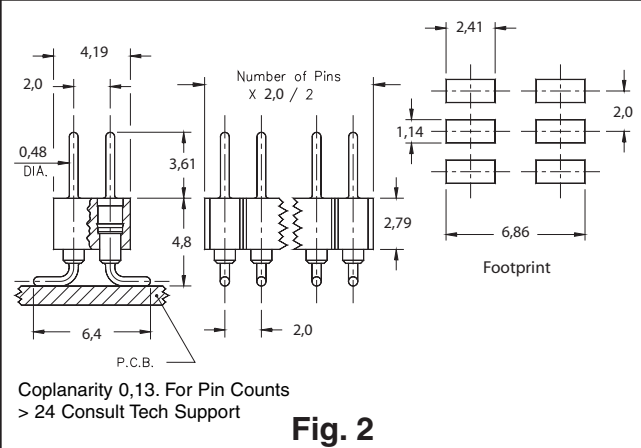

- Headers (830 & 832) use MM# 6218 pins. See page 166 for details.
- Sockets (831 & 833) use MM# 1802 receptacles and accept pin diameters from 0,36-0,64. See page 138 for details.

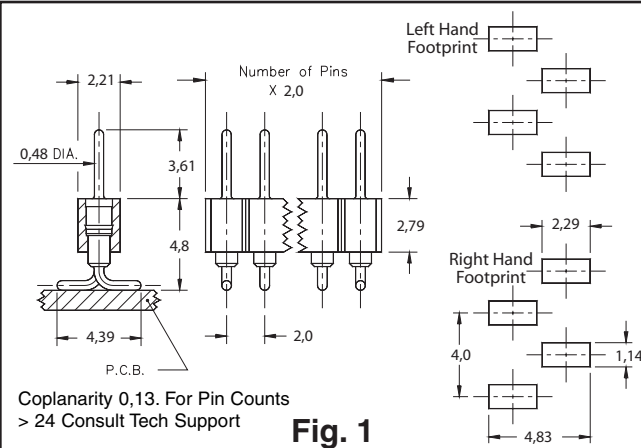

- Coplanarity 0,13 (Single Row max 12 pins; Double Row max 24 pins) for higher pin counts contact tech support.
- Insulators are high temp. thermoplastic.

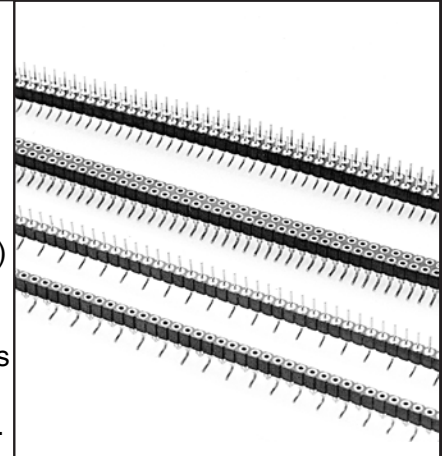

Ordering Information

Fig. 1L	Single Row Header, Left Hand Footprint Odd or Even # of pins					
	830-XX-0_ -30-001000 Specify # of pins → 01-50					
Fig. 1R	Single Row Header, Right Hand Footprint Even # of pins					
	830-XX-0_ -30-002000 Specify even # of pins → 02-50					
Fig. 2	Double Row Header, Even # of pins					
	832-XX- _ -30-001000 Specify even # of pins → 002-100					
SPECIFY PLATING CODE XX=		10◇	90	40◇		
Pin Plating		0,25µm Au	5,08µm Sn/Pb	5,08µm Sn		
Fig. 3L	Single Row Socket, Left Hand Footprint Odd or Even # of pins					
	831-XX-0_ -30-001000 Specify # of pins → 01-50					
Fig. 3R	Single Row Socket, Right Hand Footprint Even # of pins					
	831-XX-0_ -30-002000 Specify even # of pins → 02-50					
Fig. 4	Double Row Socket, Even # of pins					
	833-XX- _ -30-001000 Specify even # of pins → 002-100					
SPECIFY PLATING CODE XX=			93		43◇	
Sleeve (Pin)			5,08µm Sn/Pb		5,08µm Sn	
Contact (Clip)			0,76µm Au		0,76µm Au	

For RoHS compliance
select plating code.