

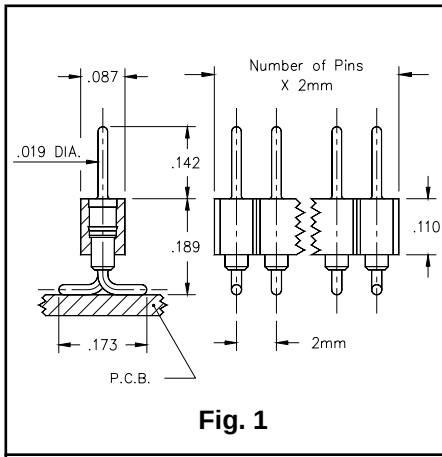


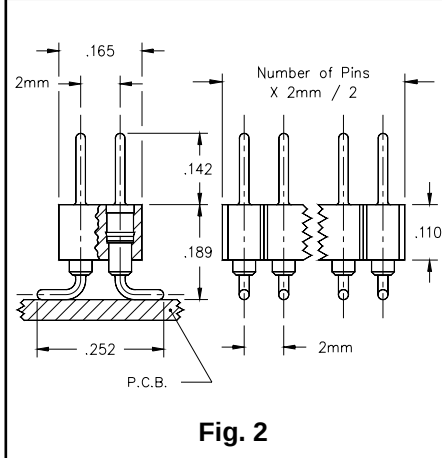

- Series 830 and 831 interconnects are available in single and double row form.
- Headers (830 & 832) use MM# 6218 pins. (See page 166 for details)
- Sockets (831 & 833) use MM# 1802 receptacles accept pin diameters from .015-.025. (See page 138 for details)
- Insulators are high temp. thermoplastic.

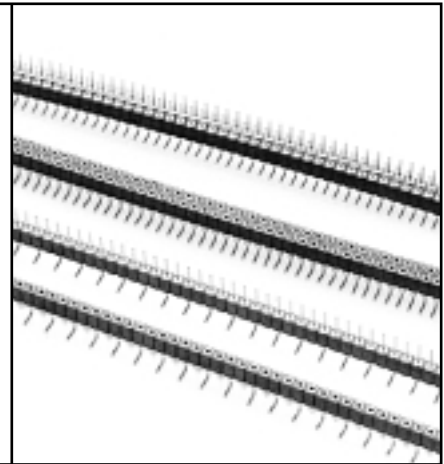

Ordering Information

Fig. 1	Single Row	.189" Surface Mount Header
	830-XX-0__-30-001	
	Specify # of pins	01-50
Fig. 2	Double Row	.189" Surface Mount Header
	832-XX-__-30-001	
	Specify # of pins	002-100

SPECIFY PLATING CODE XX=	10	90		
Pin Plating	10μ" Au	200μ" Sn/Pb		


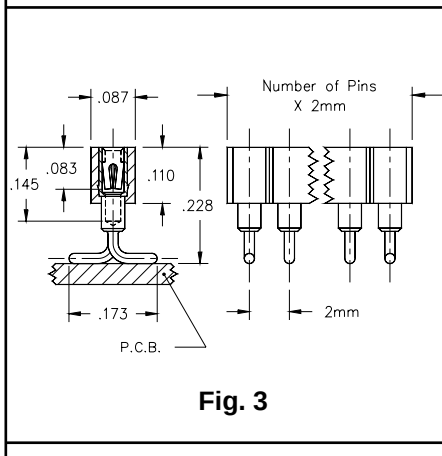


Fig. 3	Single Row	.228" Surface Mount Socket
	831-XX-0__-30-001	
	Specify # of pins	01-50
Fig. 4	Double Row	.228" Surface Mount Socket
	833-XX-__-30-001	
	Specify # of pins	002-100

SPECIFY PLATING CODE XX=			93	99
Sleeve (Pin)			200μ" Sn/Pb	200μ" Sn/Pb
Contact (Clip)			30μ" Au	200μ" Sn/Pb



RECOMMENDED P.C.B. LAYOUT

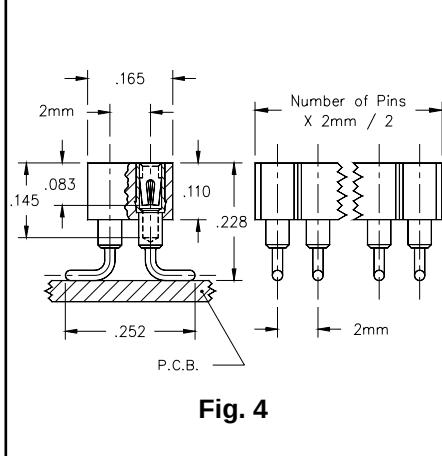