




10 9 8 7 6 5 4 3 2 1

(E)

STRIP MATERIAL NUMBER	FINISH
84590-0024	OVERALL NICKEL 80µ" MINIMUM

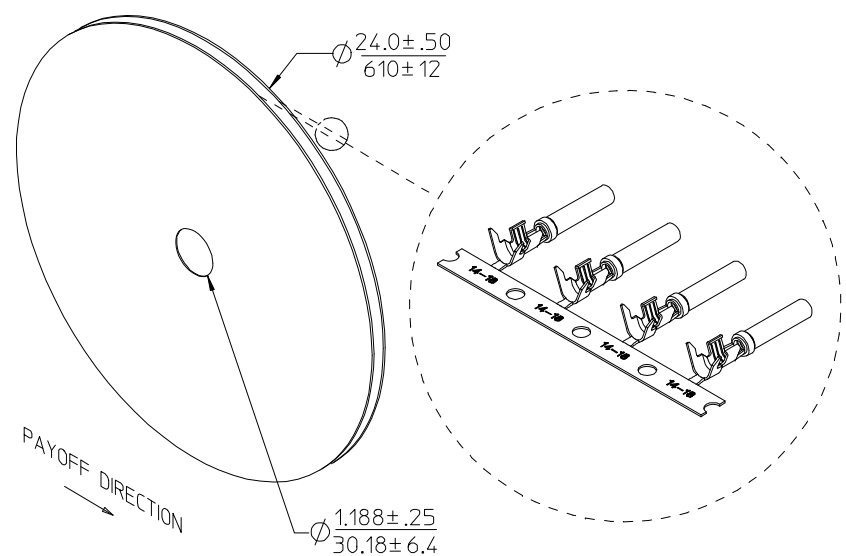


SECTION Z-Z



SECTION Y-Y

SELECT PLATING AREA
(CONTACT BEAM ONLY)

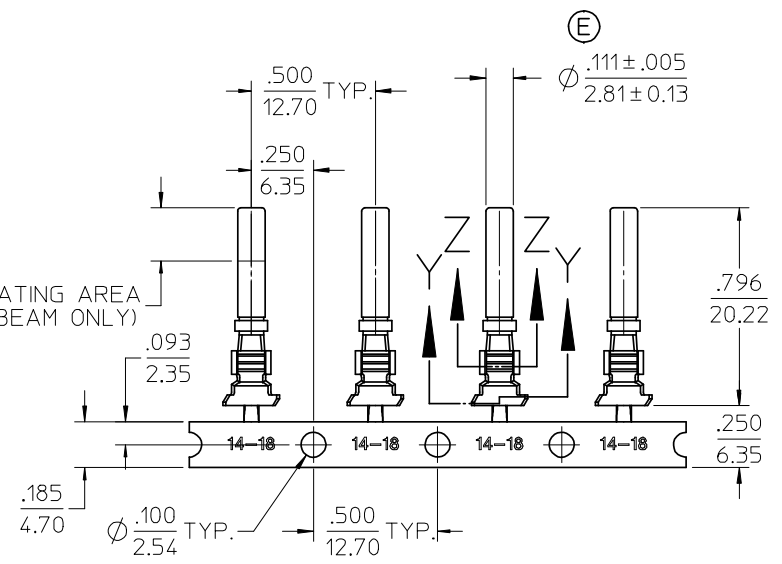

NOTES:

1. TERMINAL MATERIAL: COPPER ALLOY, .012/0.30 THICK.
HOOD MATERIAL: STAINLESS STEEL, .008/0.20 THICK.
2. FINISH: SEE CHART.
3. STRIP TERMINALS ARE REELED AS SHOWN ABOVE,
3000 PARTS PER REEL.
4. TERMINAL FOR USE WITH SERIES XRC CONNECTOR
ASSEMBLIES.
5. ALL DIMENSIONS ARE REFERENCE.
6. ALL MATERIALS AND FINISHES ARE ROHS COMPLIANT.

(E)

WIRE INSULATION O.D. RANGE $.095-1.50$ / $2.41-3.81$

UPDATE NOTES & TABLE EC NO: WNA2008-0139 DRAWN BY: 2008/07/26 CHKD: RDEROSS 2008/04/21 APPR: RDEROSS 2008/04/24	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± .010 2 PLACES ± 0.25 ± .02 1 PLACE ± 0.5 ± --- ANGULAR ± 3 ° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION STYLE IN/MM DRAWN BY: RSTONE DATE: 09/15/04 CHECKED BY: DATE: 09/15/04 APPROVED BY: LROTHAUS DATE: 09/15/04 MATERIAL NO. SIZE B	SCALE 2:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	TITLE CONTACT SOCKET (HOODED), 14-18 AWG	molex MOLEX INCORPORATED	DOCUMENT NO. SD-84590-002	SHEET NO. 1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										