

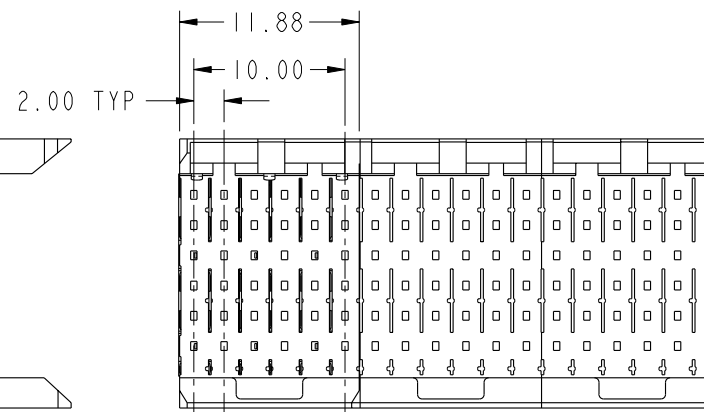


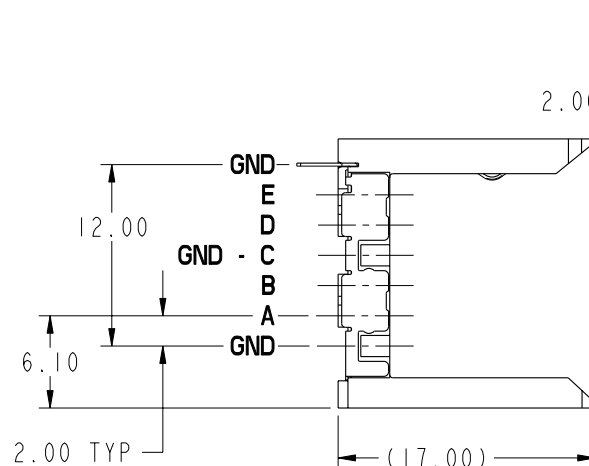

PRODUCT NUMBER	GROUND SPRING CONTACT FINGERS PLATING PERFORMANCE LEVEL	GROUND SPRING EON PRESS FIT TAIL PLATING
84621-101	TELCORDIA CO	STANDARD (SnPb)
84621-101LF		LEAD FREE (Sn)
84621-301	CUSTOMER SPECIAL	STANDARD (SnPb)
84621-301LF		LEAD FREE (Sn)
84621-501	TELCORDIA UE	STANDARD (SnPb)
84621-501LF		LEAD FREE (Sn)

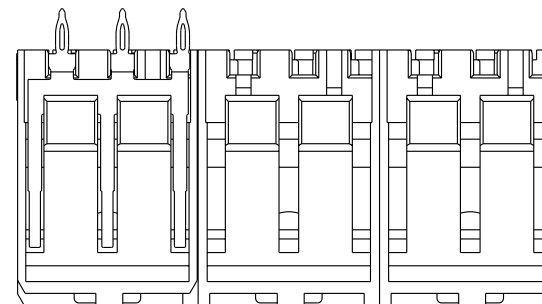

mat'l code SEE NOTE 5				tolerances unless otherwise specified		CUSTOMER		FCI www.fciconnect.com	
ltr	ecn no.	dr	date	linear	0.X ±0.1	projection	COPY	title VERTICAL SIGNAL HDR SHROUD 5 ROW, PRESS-FIT 30 POS. STD.	product family METRAL 2000
A	V90180	L-IV	1999-04-13		0.XX ±0.05				
B	V94089	MRS	1999-11-18	angles	.XXX ±.020	MM	scale 2:1	size A	dwg no 84621
C	VI2224	EPK	2001-09-13		0° ±2°				
D	V05-0797	VS	2005-08-31	dr	E. KROPER.	2001-09-13	code 213 1 of 3	cage code 22526	4
E	V06-0544	DCH	2006-06-12	enrg	J. VOLSTORF	2001-09-13			
F	V07-0677	HTB	2007-11-14	chr	J. VOLSTORF	2001-09-13			
G	V08-0072	HTB	2008-02-11	appd	J. VOLSTORF	2001-09-13			
sheet index	revision sheet	G 1	G 2	G 3					

Pro/E

cage code 22526

PDM: Rev:G

STATUS: Released


Printed: Dec 16, 2008



PRODUCT NUMBER
SEE SHEET 1

NOTES:

1. SEE APPLICATION SPECIFICATION GS-20-010 FOR INFORMATION ON AVAILABLE TOOLING, CIRCUIT BOARD DESIGN CONSIDERATIONS, REPAIR PROCEDURES AND PRODUCT OFFERINGS.
2. SEE FCI PUBLICATION 950511-028 FOR "ELECTRICAL PERFORMANCE DATA FOR DIFFERENTIAL APPLICATIONS."
3. SEE FCI PUBLICATION 950511-029 FOR "ELECTRICAL PERFORMANCE DATA FOR SINGLE-ENDED APPLICATION."
4. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE WITH ASME Y14.5, 1994
5. HOUSING MATERIAL: LIQUID CRYSTAL POLYMER, 30% GLASS FILLED, FLAME RETARDANT PER UL 94-V0.
GROUND SPRING MATERIAL: PHOSPHER BRONZE
STRIPLINE SHIELDED MATERIAL: PHOSPHER BRONZE
6. PLATING INFORMATION: SEE TABLE
7. THE MIN PCB THICKNESS FOR REAR PLUG-UP APPLICATIONS IS 2.9mm
SINCE THE COMPLIANT SECTIONS OF THE GROUND SPRING OF THE HEADER DIRECTLY OPPOSE THE GROUND SPRING OF THE SHROUD.
8. THESE HOLES ARE NEEDED FOR REAR PLUG-UP DESIGNS USING A SHROUD.
ALL OTHER HOLES ARE FOR THE HEADER.
9. THE 'SHROUD OUTLINE' IS THE MIN OUTLINE REQUIRED. TO DETERMINE THE OUTLINE NECESSARY TO PERMIT THE VARIOUS TYPES OF REPAIR OPERATIONS, SEE APPLICATION SPECIFICATION GS-20-010.
10. CURRENT RATING: 1 AMP PER PIN
11. TEMPERATURE RANGE: -55°C TO +105°C
12. PRODUCTS WHERE THE PART NUMBERS ENDS IN LF MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
13. ALL PRODUCTS WILL WITHSTAND EXPOSURE TO 260°C FOR 60 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
FOR LEAD FREE PART NUMBERS, ADD 'LF' SUFFIX EXAMPLE:84621-X01LF

mat'l code SEE NOTE 5				tolerances unless otherwise specified		CUSTOMER		 www.fciconnect.com											
lfr	ecn no.	dr	date	linear	0. X ±0.1		COPY		title VERTICAL SIGNAL HDR SHROUD 5 ROW, PRESS-FIT 30 POS. STD. 										
G					0. XX ±0.05		projection												
					. XXX ±.020														
				angles	0° ±2°				 scale 2 : 1										
				dr	E. KROPER.	2001-09-13	product family						METRAL 2000		code				
				enrg	J. VOLSTORF	2001-09-13	size						dwg no		213				
				chr	J. VOLSTORF	2001-09-13									sheet				
				appd	J. VOLSTORF	2001-09-13									3				
sheet index		revision sheet																	



www.fciconnect.com

title
VERTICAL SIGNAL HDR SHROUD
5 ROW, PRESS-FIT 30 POS. STD.

product family METRAL 2000 code

size dwg no 84621 sheet 213 3

cage code 22526

Pro/E

3

4

PDM: Rev:G

STATUS:Released

Printed: Dec 16, 2008