


MATERIAL NO.	LENGTH
847290003	6.00 IN +.47 -0 (152.0mm +12-0)
847290004	31.88 IN +1.00-0 (810.0mm +25.4-0)
847290005	51.57 IN +1.00-0 (1310.0mm +25.4-0)
847290006	81.89 IN +1.57-0 (2080.0mm +40.0-0)
847290007	131.10 IN +3.15-0 (3330mm +80.0-0)
847290008	196.90 IN +3.94-0 (5000mm +100.0-0)

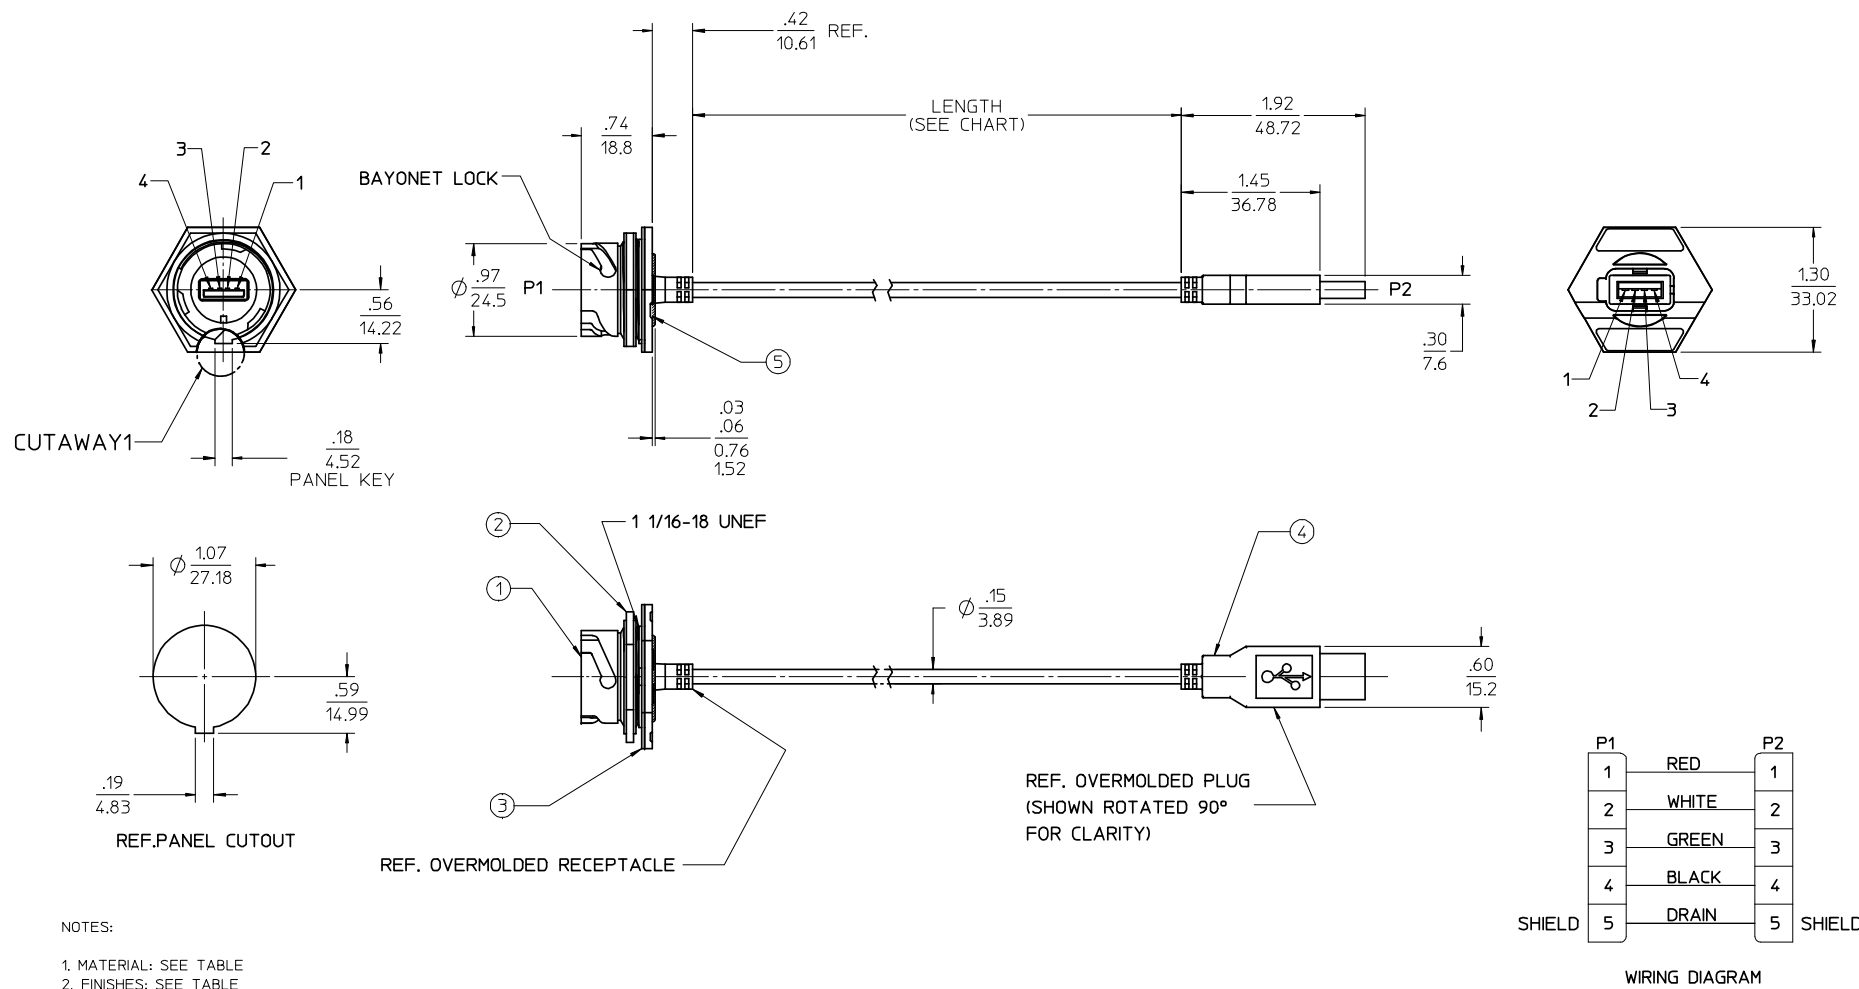

- NOTES:
1. MATERIAL: SEE TABLE
 2. FINISHES: SEE TABLE
 3. CABLE MATERIAL:
OVERMOLD & JACKET: PVC
SHELL: PHOSPHOR BRONZE, NI PLATED
CONTACTS: PHOSPHOR BRONZE, GOLD PLATED
 4. ASSEMBLY IS RoHS COMPLIANT

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
5	A/R	POTTING COMPOUND	EPOXY	BLACK
4	1	USB-A CABLE SUB-ASSEMBLY, SHIELDED	AS NOTED	AS NOTED
3	1	PANEL GASKET	NEOPRENE	BLACK
2	1	LOCKNUT	PBT, UL-94V-0	BLACK
1	1	RECEPTACLE HOUSING	PBT, UL-94V-0	BLACK

REV'D TOLERANCES EC NO: WNA2009-0029 DRAWN: STONE 2008/07/14 CHKD: B. RUPERT APPR: J. MURPHY 2008/08/18	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
		mm INCH		DRAWN BY DATE R. STONE 2007/02/15		TITLE USB-A CORD ASSEMBLY PLUG & RECEPTACLE			
		4 PLACES ± --- ± ---		CHECKED BY DATE J. MACNEIL 2007/02/20					
		3 PLACES ± --- ± ---		APPROVED BY DATE J. MACNEIL 2007/02/20					
2 PLACES ± --- ± .01		MATERIAL NO.		SEE CHART		DOCUMENT NO.		SHEET NO.	
1 PLACE ± 0.25 ± ---		ANGULAR ± 1/2°		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		SD-84729-006 1 OF 1	