

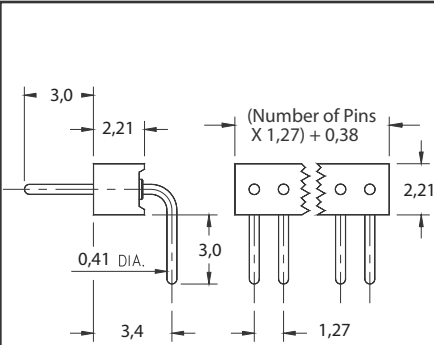


Fig. 1

- Series 850 and 851 interconnects are available in single and double row form.
- 850 & 852 series Headers use MM #4006-1 and #4006-2 pins. See page 166 details.
- 851 & 853 series Sockets use MM #4890-1 and #4890-2 receptacles, that accept pin diameters from 0,38 - 0,53 See page 129 for details.
- Insulators are high temp. thermoplastic.

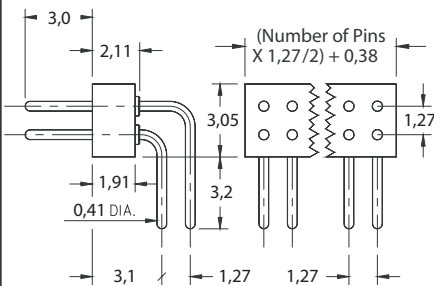
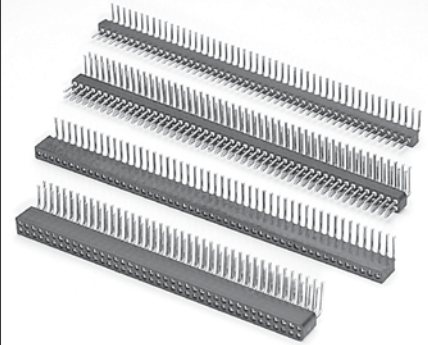


Fig. 2

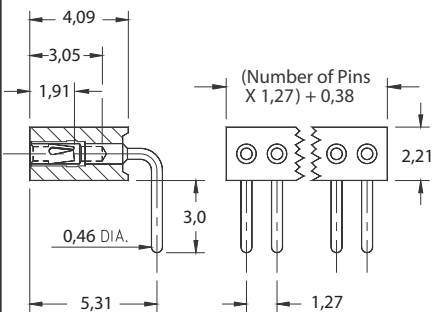


Fig. 3

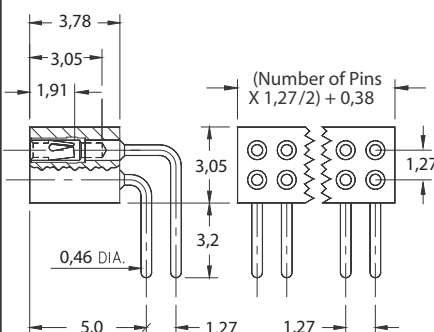


Fig. 4

Ordering Information

Fig. 1	Single Row	Right Angle Pin Header
	850-XX-0__-20-001000	
	Specify # of pins	01-50
Fig. 2	Double Row	Right Angle Pin Header
	852-XX-__-20-001000	
	Specify # of pins	002-100



XX= Plating Code
See Below

For RoHS compliance
 select plating code.

SPECIFY PLATING CODE XX=	10	90	40	
Pin Plating	0,25µm Au	5,08µm Sn/Pb	5,08µm Sn	

Fig. 3	Single Row	Right Angle Socket
	851-XX-0__-20-001000	
	Specify # of pins	01-50
Fig. 4	Double Row	Right Angle Socket
	853-XX-__-20-001000	
	Specify # of pins	002-100



XX= Plating Code
See Below

For RoHS compliance
 select plating code.

SPECIFY PLATING CODE XX=		93	99	43	
Sleeve (Pin)		5,08µm Sn/Pb	5,08µm Sn/Pb	5,08µm Sn	
Contact (Clip)		0,76µm Au	5,08µm Sn/Pb	0,76µm Au	